




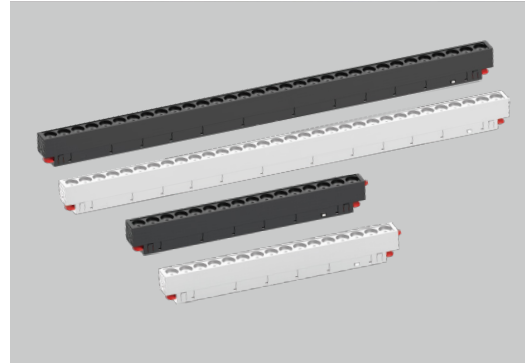
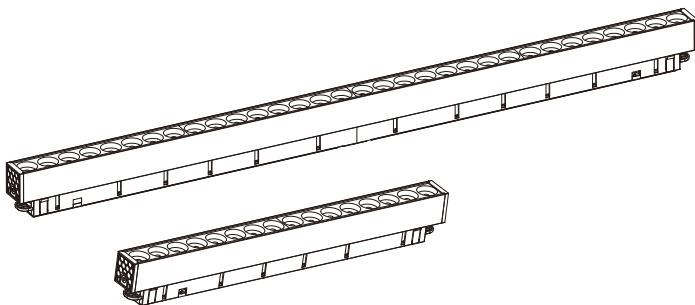


LED Magnetic Track System

NR-M2D0151 Series
IP20

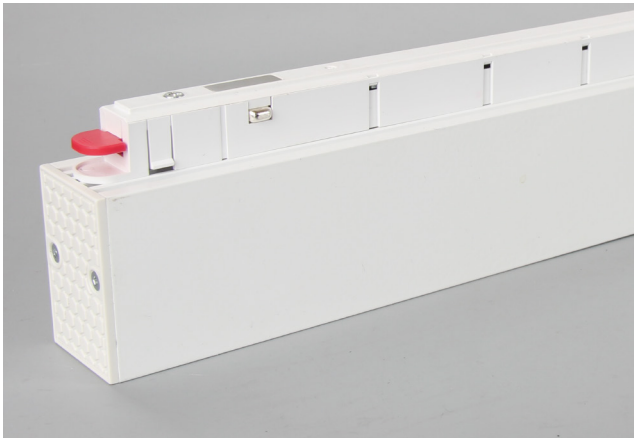

Model No	P(W)	CCT(K)	Output (lm)	lm/w	Beam Angle	Color	Dimensions in mm			
							A	B	C	
NR-M2D0151-15-27K-BK-24D	15	2700	1110	74	24°	Black	582	23	43	0.35
NR-M2D0151-15-30K-BK-24D	15	3000	1155	77	24°	Black	582	23	43	0.35
NR-DL105-15 DW	15	4000	1155	71	24°	Black	582	23	43	0.35
NR-M2D0151-15-27K-BK-60D	15	2700	1110	74	60°	Black	582	23	43	0.35
NR-M2D0151-15-30K-BK-60D	15	3000	1155	77	60°	Black	582	23	43	0.35
NR-M2D0151-15-40K-BK-60D	15	4000	1155	77	60°	Black	582	23	43	0.35
NR-M2D0151-15-30K-WH-24D	15	3000	1155	77	24°	White	582	23	43	0.35
NR-M2D0151-15-40K-WH-24D	15	4000	1155	77	24°	White	582	23	43	0.35
NR-M2D0151-10-27K-BK-24D	10	2700	680	68	24°	Black	295	23	43	0.22
NR-M2D0151-10-30K-BK-24D	10	3000	680	68	24°	Black	295	23	43	0.22
NR-M2D0151-10-40K-BK-24D	10	4000	710	71	24°	Black	295	23	43	0.22
NR-M2D0151-10-27K-BK-60D	10	2700	680	68	60°	Black	295	23	43	0.22
NR-M2D0151-10-30K-BK-60D	10	3000	680	68	60°	Black	295	23	43	0.22
NR-M2D0151-10-40K-BK-60D	10	4000	710	71	60°	Black	295	23	43	0.22
NR-M2D0151-10-30K-WH-24D	10	3000	680	68	24°	White	295	23	43	0.22
NR-DL104-10 DW	10	4000	710	71	24°	White	295	23	43	0.22


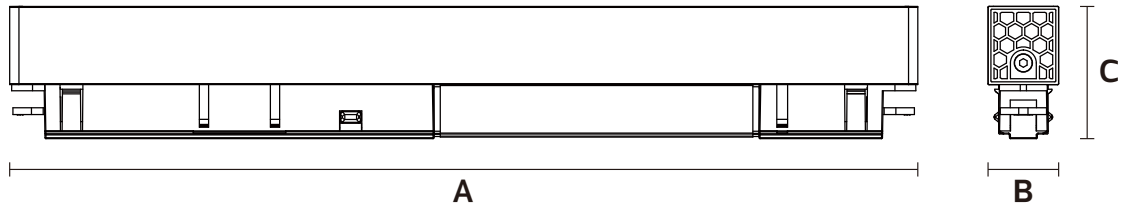


Description:
LED Magnetic Track System


Main material:
Aluminum+Pc

Specification:
Aluminum lamp body integrated die-casting molding, spraying process, fine work, waterproof and dustproof. High light transmission PC material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications
.Office
.Meeting room
.Sitting room

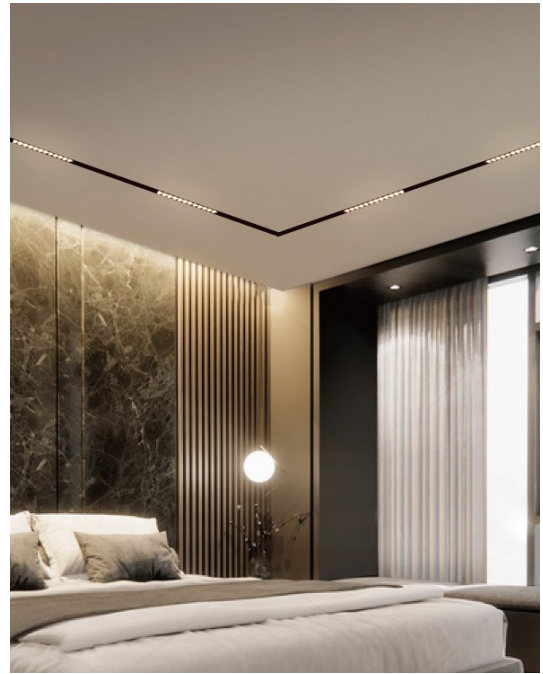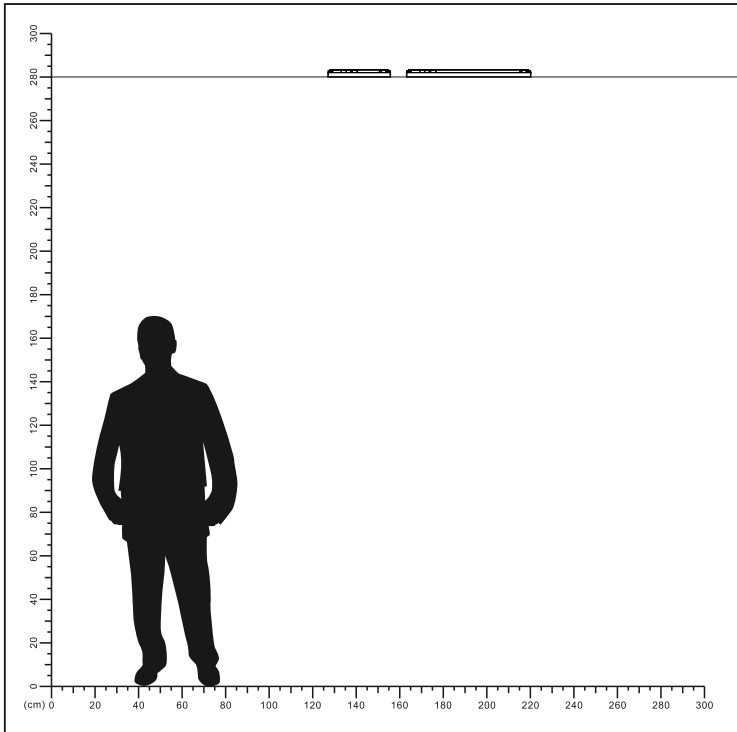


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

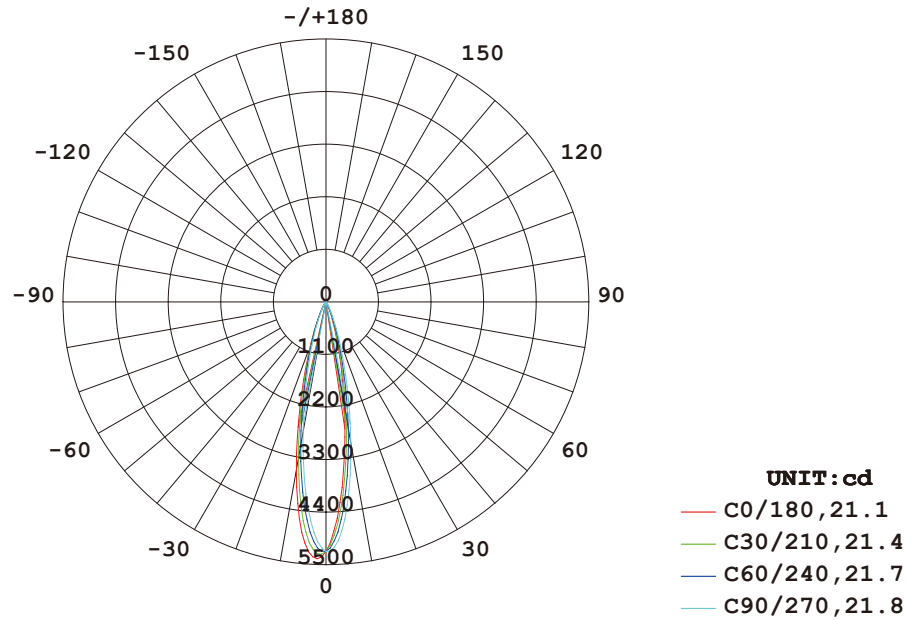


AVERAGE BEAM ANGLE (50%) : 21.5 DEG

Illuminance at a Distance

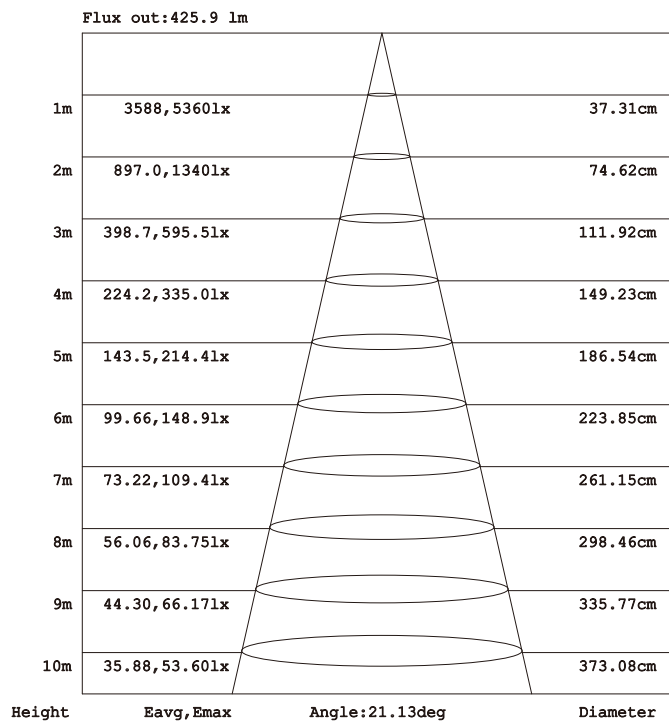


Model No: NR-M2D0151-10-24D

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

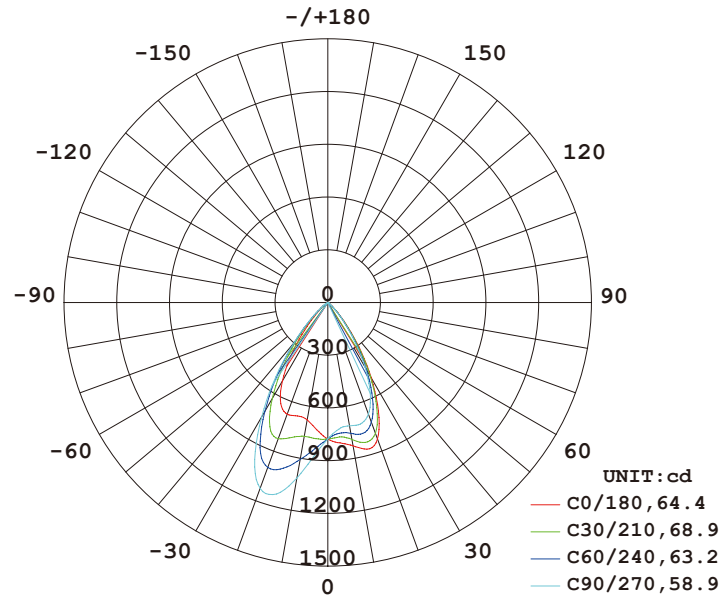


AVERAGE BEAM ANGLE (50%) : 63.9 DEG

Illuminance at a Distance

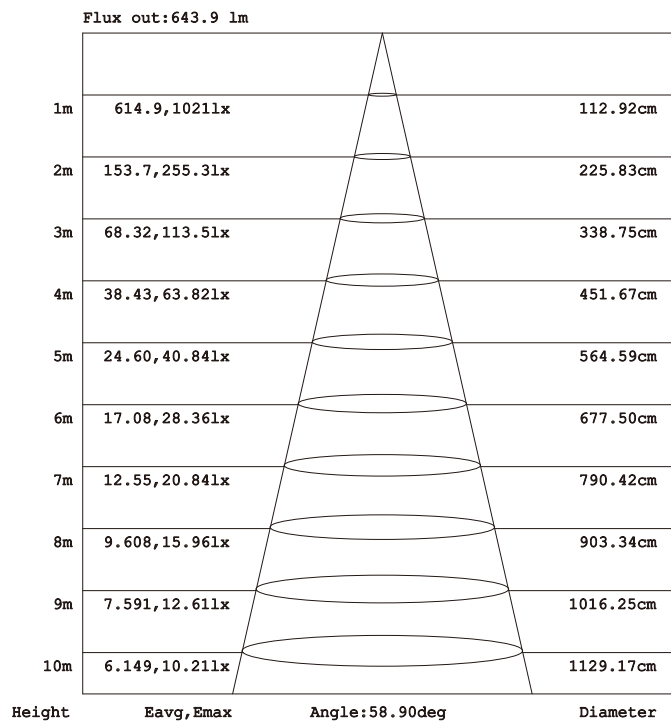


Model No: NR-M2D0151-10-60D

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

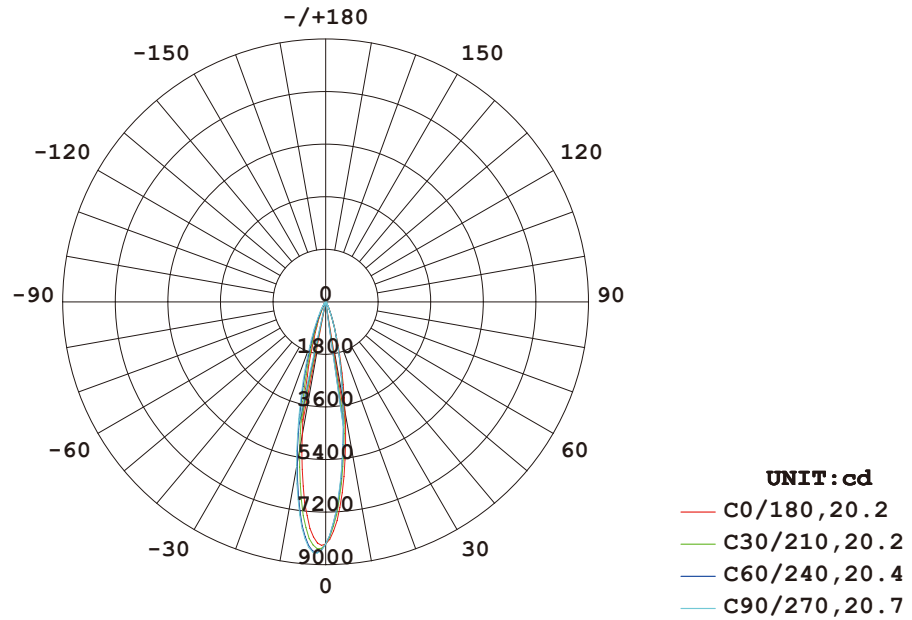


AVERAGE BEAM ANGLE (50%) : 20.4 DEG

Illuminance at a Distance

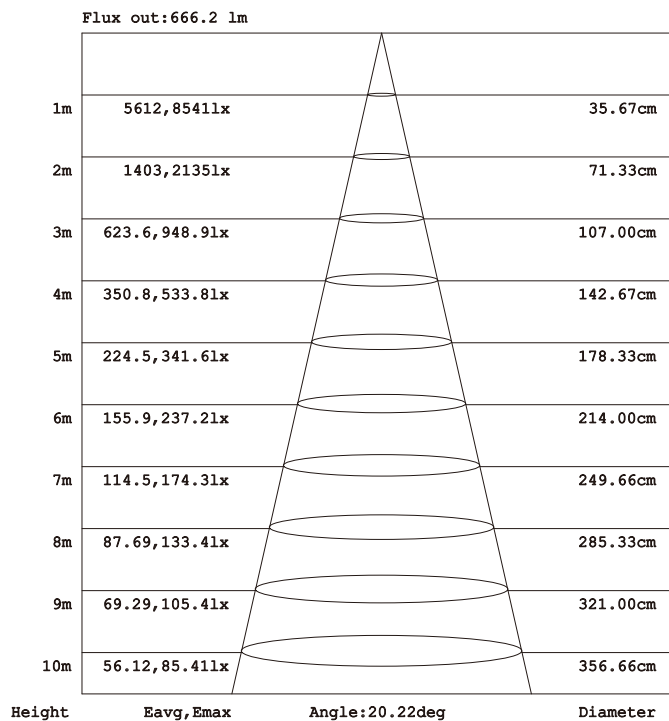


Model No: NR-M2D0151-15-24D

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

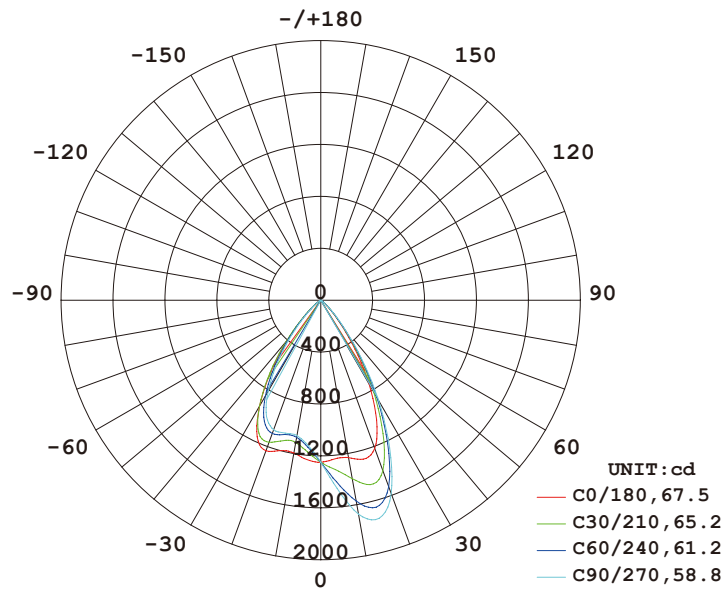

AVERAGE BEAM ANGLE (50%) : 63.2 DEG

Illuminance at a Distance

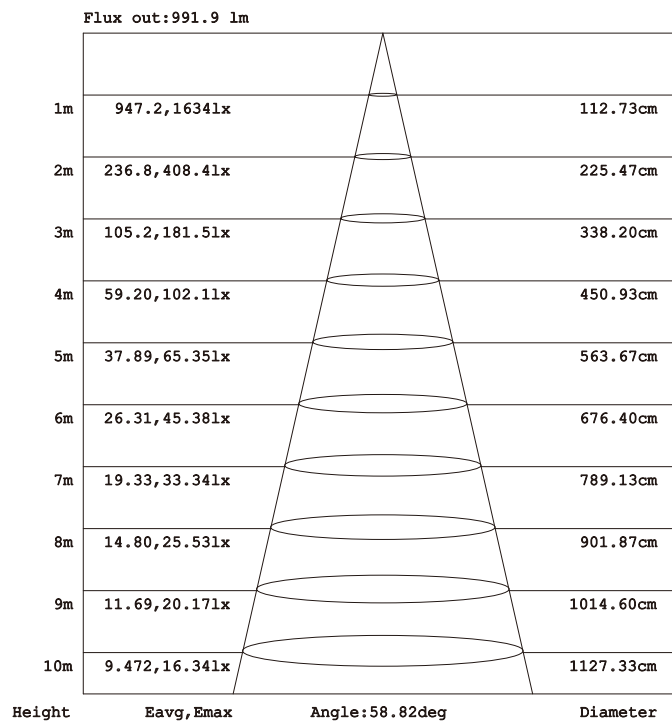

Model No: NR-M2D0151-15-60D

