





LED Magnetic Track System

NR-M2FD0551 Series
IP20

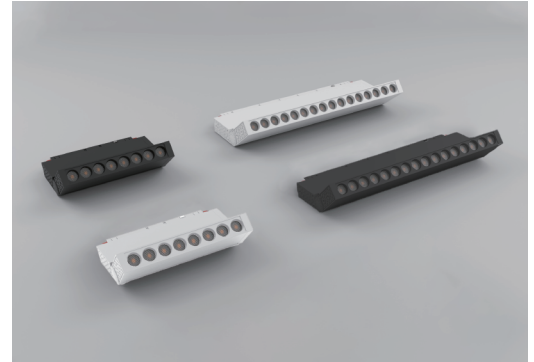


Model No	P(W)	CCT(K)	Output (lm)	lm/w	Color	Dimensions in mm			kg
						A	B	C	
NR-M2FD0551-10-27K-BK-24D	10	2700	680	68	Black	305	23	92	0.6
NR-M2FD0551-10-30K-BK-24D	10	3000	710	71	Black	305	23	92	0.6
NR-M2FD0551-10-40K-BK-24D	10	4000	710	71	Black	305	23	92	0.6
NR-M2FD0551-10-30K-WH-24D	10	3000	710	71	White	305	23	92	0.6
NR-M2FD0551-10-40K-WH-24D	10	4000	710	71	White	305	23	92	0.6
NR-M2FD0551-6-27K-BK-24D	6	2700	414	69	Black	158	24	92	0.38
NR-M2FD0551-6-30K-BK-24D	6	3000	426	71	Black	158	24	92	0.38
NR-M2FD0551-6-40K-BK-24D	6	4000	426	71	Black	158	24	92	0.38
NR-M2FD0551-6-30K-WH-24D	6	3000	426	71	White	158	24	92	0.38
NR-M2FD0551-6-40K-WH-24D	6	4000	426	71	White	158	24	92	0.38


Dimensions in mm

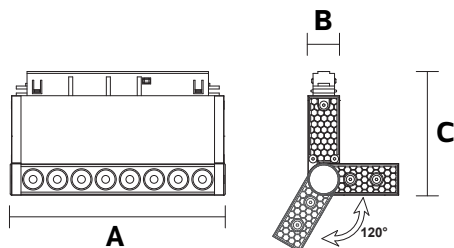

Model No: NR-M2FD0551-6

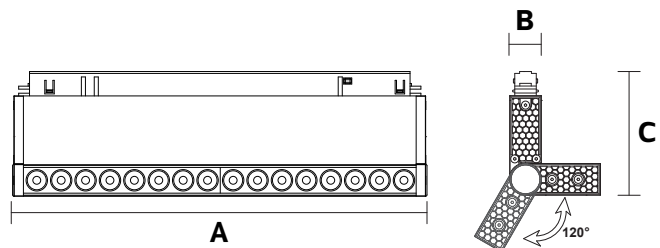

Model No: NR-M2FD0551-10

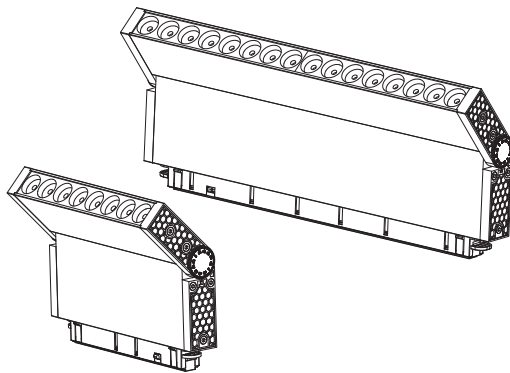


Description:
LED Magnetic Track System


Main material:
Aluminum+Pc

Specification:
Aluminum lamp body integrated die-casting molding, spraying process, fine work, waterproof and dustproof. High light transmission PC material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications
.Office
.Meeting room
.Sitting room

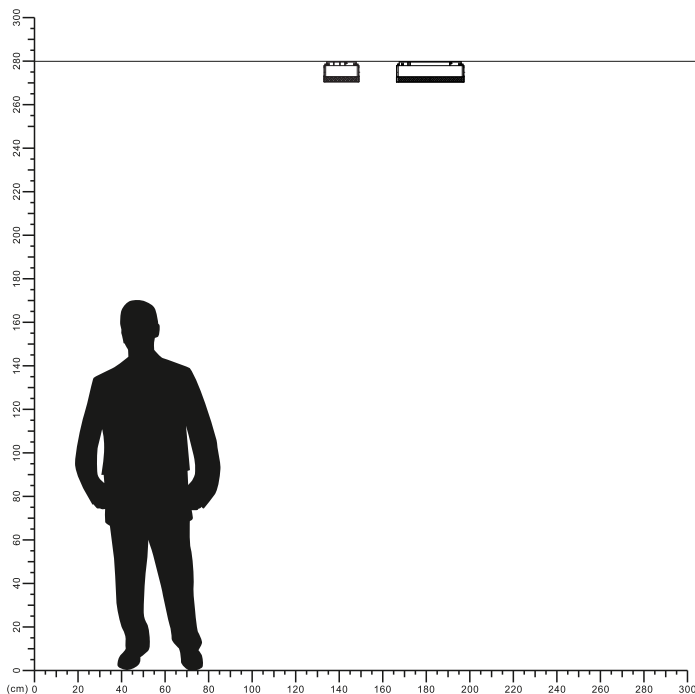


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

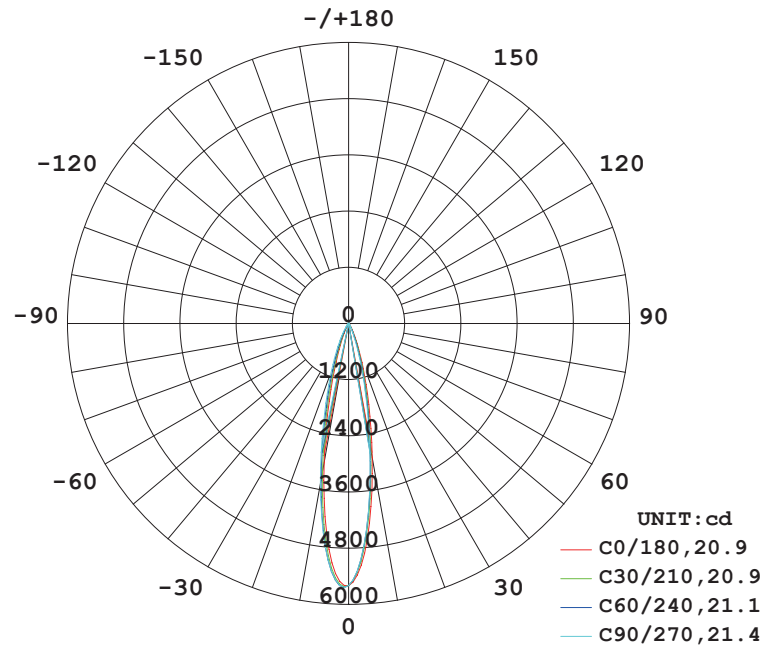


AVERAGE BEAM ANGLE (50%) : 21.1 DEG

Illuminance at a Distance

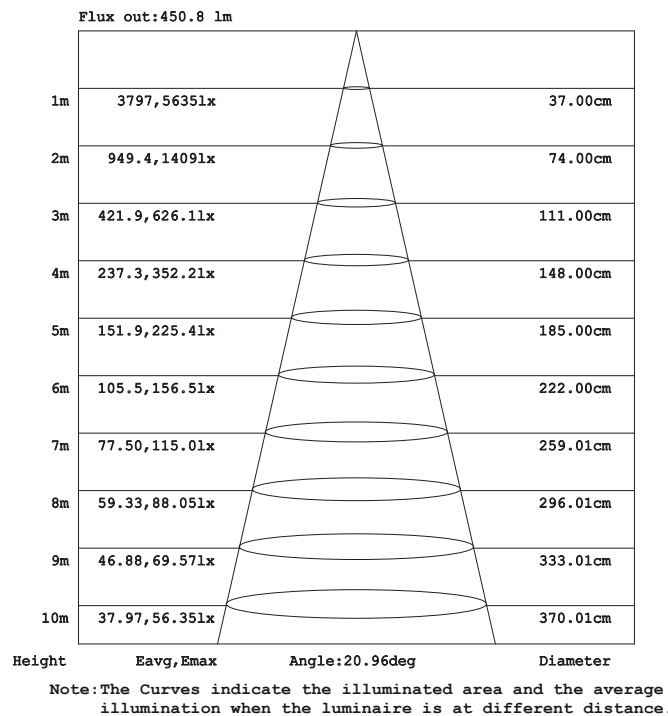


Model No: NR-M2FD0551-10

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


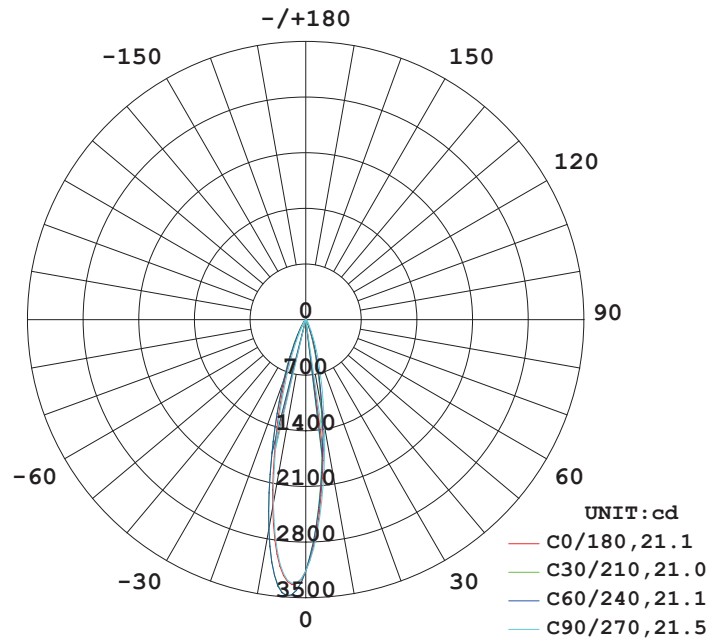


AVERAGE BEAM ANGLE (50%) : 21.2 DEG

Illuminance at a Distance

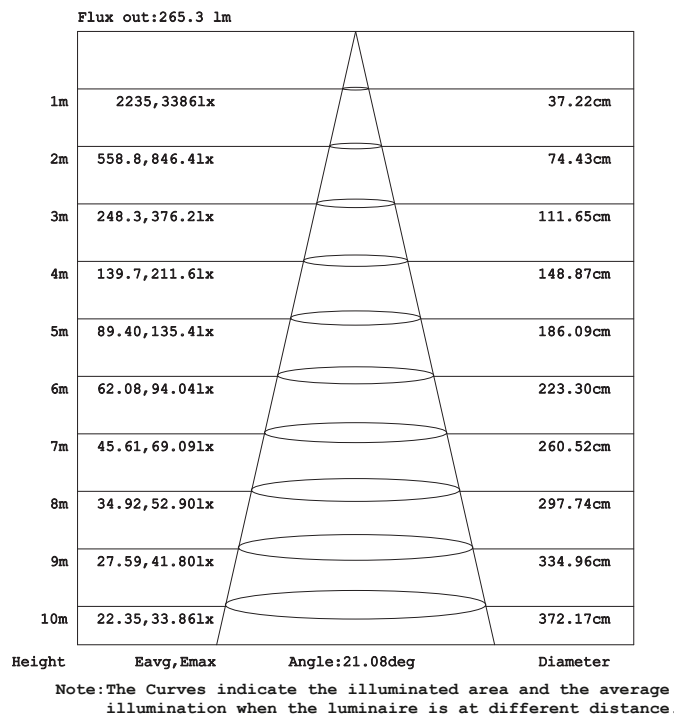


Model No: NR-M2FD0551-6

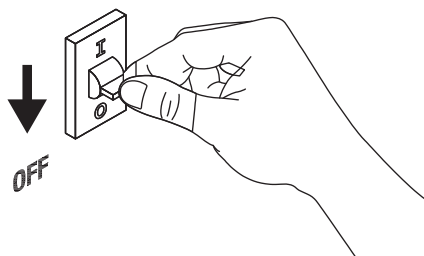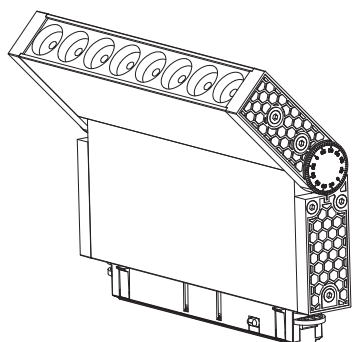


1

Turn off the power

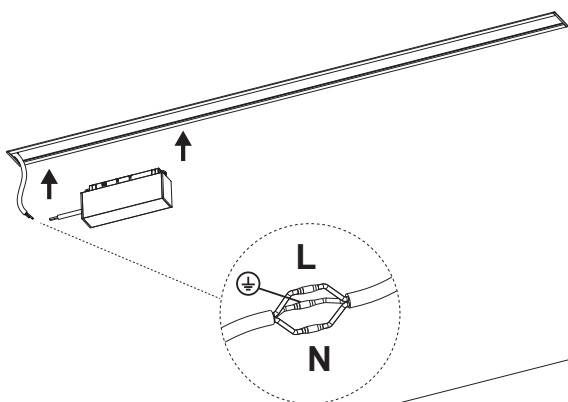


2

Terminals connect power cables and wrap terminals with waterproof tape

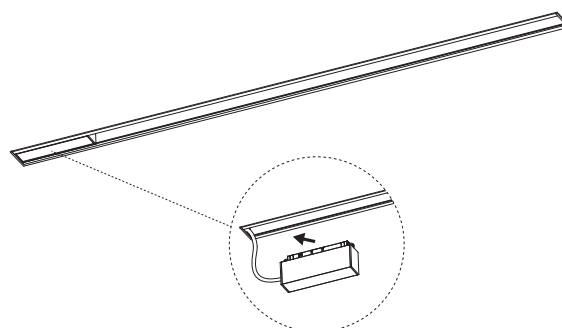


3

Install DC48V power supply

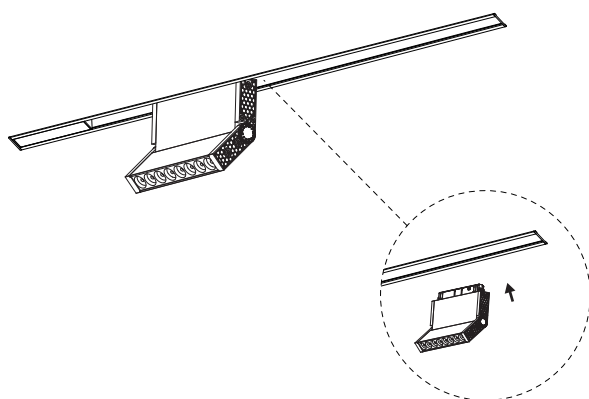

4

Install lamp the Installation is complete

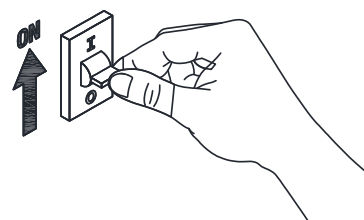

5

Turn on power

