




LED Magnetic Track System


NR-M2P0251 Series
IP20

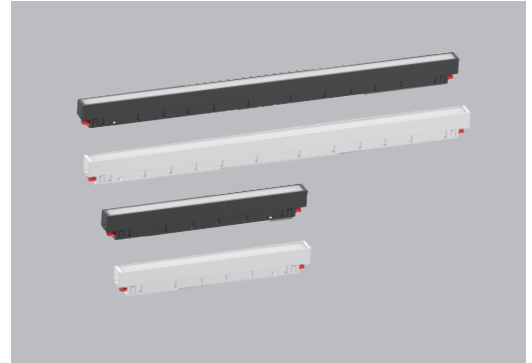


Model No	P(W)	CCT(K)	Output (lm)	lm/w	Color	Dimensions in mm			kg
						A	B	C	
NR-PL105-10 SW	10	2700	680	68	Black	295	23	43	0.2
NR-M2P0251-10-30K-BK-100D	10	3000	710	71	Black	295	23	43	0.2
NR-M2P0251-10-40K-BK-100D	10	4000	710	71	Black	295	23	43	0.2
NR-M2P0251-10-30K-WH-100D	10	3000	850	85	White	295	23	43	0.2
NR-M2P0251-10-40K-WH-100D	10	4000	710	71	White	295	23	43	0.2
NR-M2P0251-15-27K-BK-100D	15	2700	680	68	Black	582	23	43	0.34
NR-PL105-15 WW	15	3000	1200	80	Black	582	23	43	0.34
NR-PL104-15 DW	15	4000	1155	77	Black	582	23	43	0.34
NR-M2P0251-15-30K-WH-100D	15	3000	1200	80	White	582	23	43	0.34
NR-M2P0251-15-40K-WH-100D	15	4000	1200	80	White	582	23	43	0.34



Dimensions in mm

Model No:NR-PL105-10
Model No:NR-M2P0251-10



Model No:NR-PL105-15
Model No:NR-PL104-15
Model No:NR-M2P0251-15



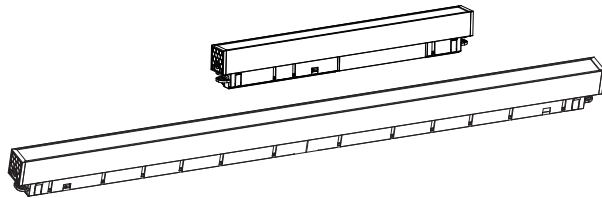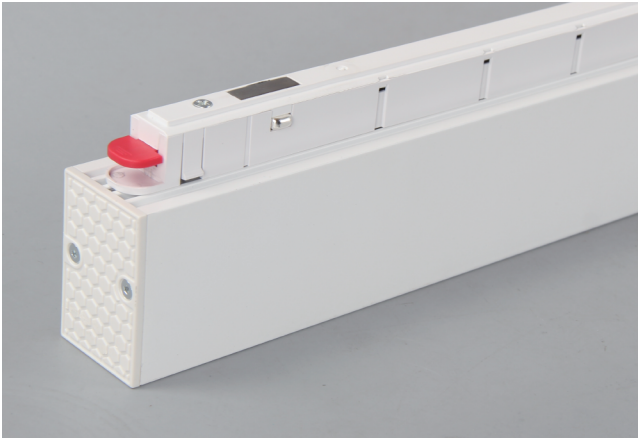


Description:
LED Magnetic Track System


Main material:
Aluminum+Pc

Specification:
Aluminum lamp body integrated die-casting molding, spraying process, fine work, waterproof and dustproof. High light transmission PC material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications
.Office
.Meeting room
.Sitting room

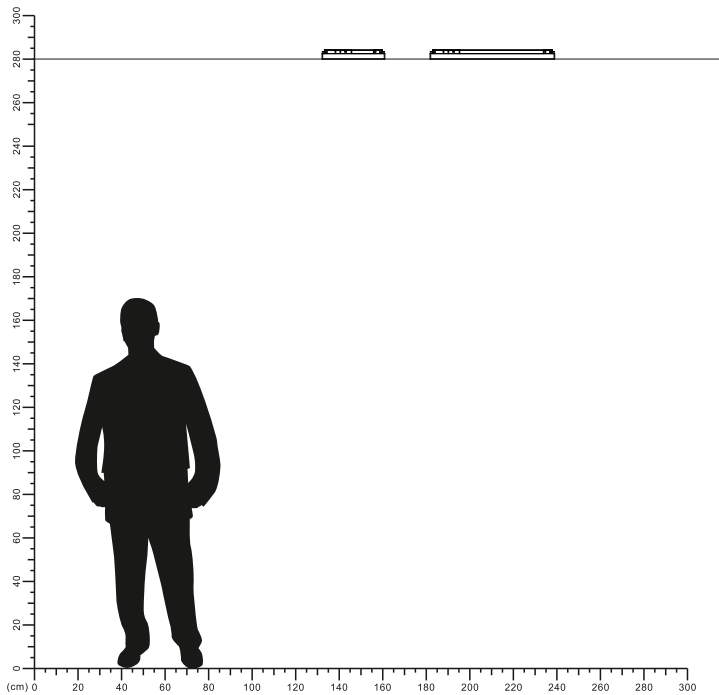


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

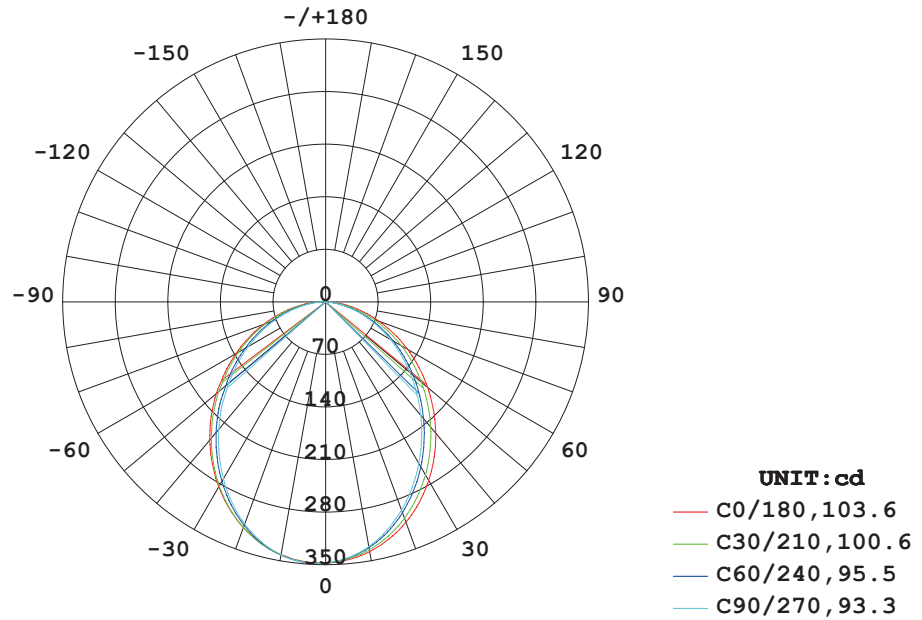


AVERAGE BEAM ANGLE (50%) : 98.3 DEG

Illuminance at a Distance

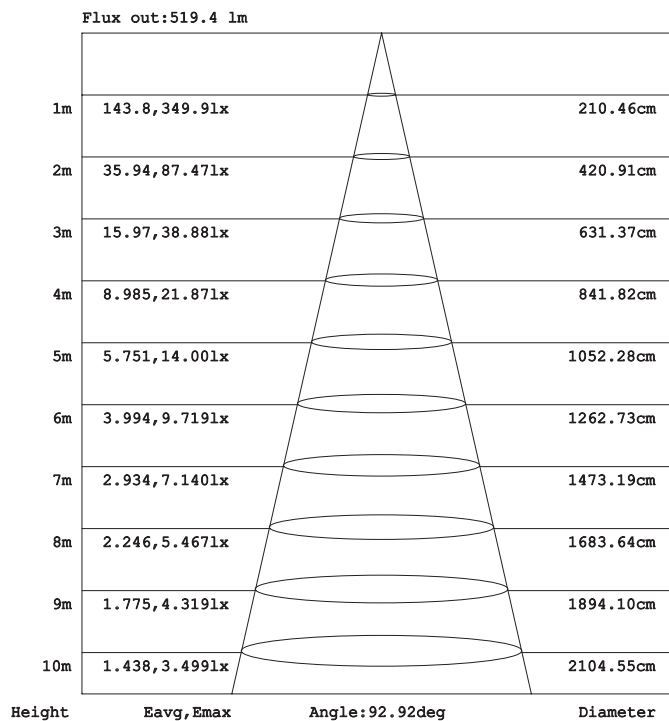


Model No: NR-M2P0251-10

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




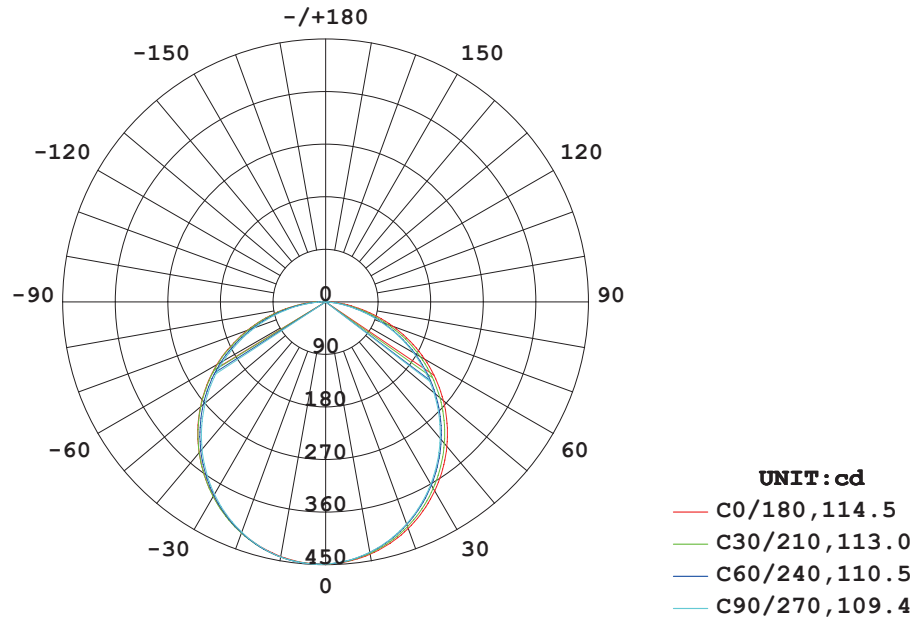


AVERAGE BEAM ANGLE (50%) : 111.8 DEG

Illuminance at a Distance

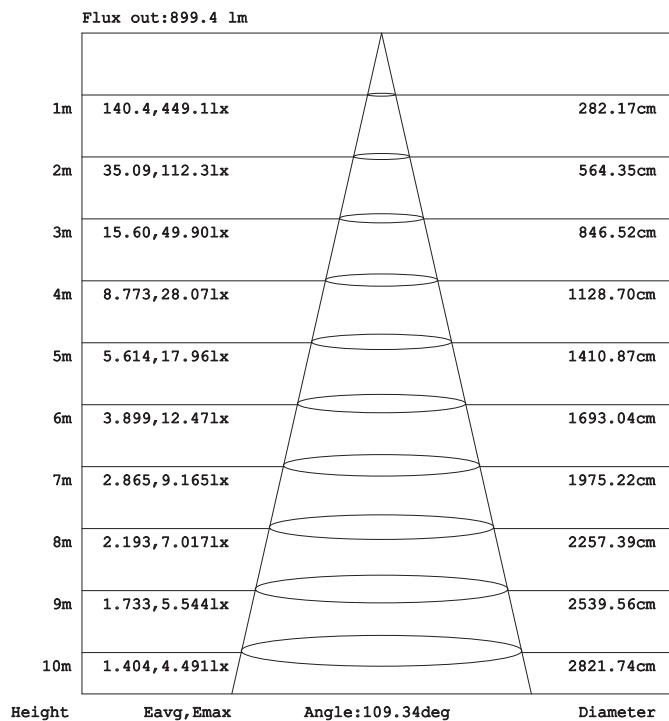


Model No: NR-M2P0251-15

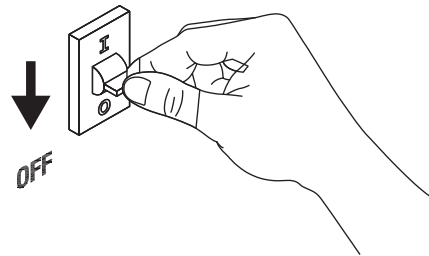


1

Turn off the power

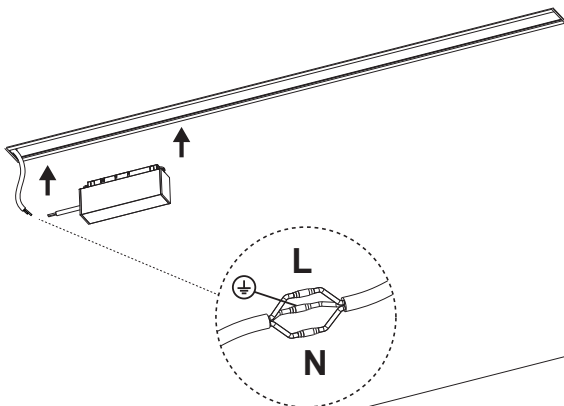


2

Terminals connect power cables and wrap terminals with waterproof tape

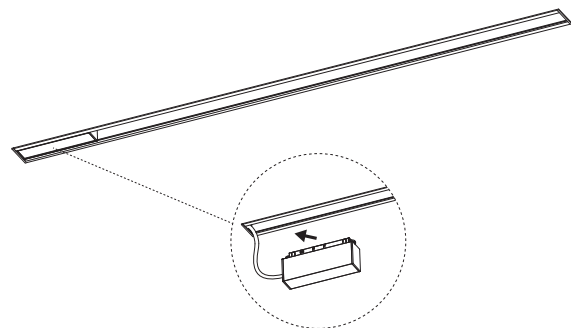


3

Install DC48V power supply

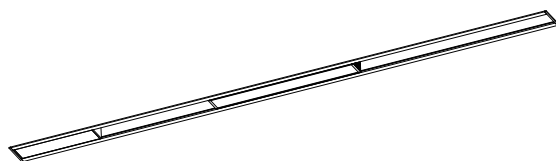

4

Installation is complete

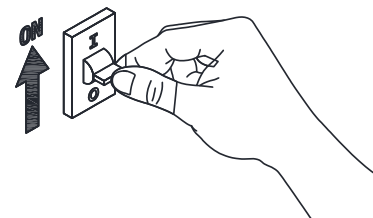

5

Turn on power

