





LED Magnetic Track System



NR-M3D0101 Series
IP20

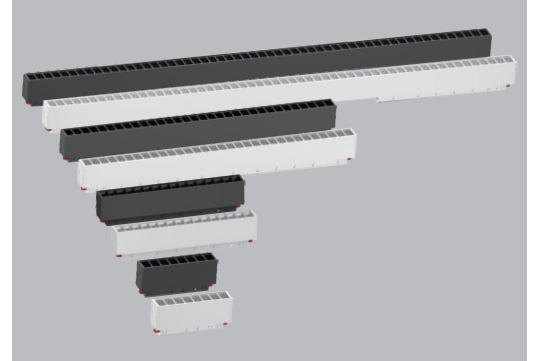


Model No	P(W)	CCT(K)	Output (lm)	lm/w	Beam Angle	Color	Dimensions in mm			
							A	B	C	
NR-M3D0101-10-27K-BK-24D	10	2700	680	68	24°	Black	292	34	70	0.32
NR-M3D0101-10-30K-BK-24D	10	3000	710	71	24°	Black	292	34	70	0.32
NR-M3D0101-10-40K-BK-24D	10	4000	710	71	24°	Black	292	34	70	0.32
NR-M3D0101-10-27K-BK-60D	10	2700	680	68	60°	Black	292	34	70	0.32
NR-M3D0101-10-30K-BK-60D	10	3000	710	71	60°	Black	292	34	70	0.32
NR-M3D0101-10-40K-BK-60D	10	4000	710	71	60°	Black	292	34	70	0.32
NR-M3D0101-10-30K-WH-24D	10	3000	710	71	24°	White	292	34	70	0.32
NR-M3D0101-10-40K-WH-24D	10	4000	710	71	24°	White	292	34	70	0.32
NR-M3D0101-15-27K-BK-24D	15	2700	1110	74	24°	Black	580	34	70	0.64
NR-M3D0101-15-30K-BK-24D	15	3000	1155	77	24°	Black	580	34	70	0.64
NR-M3D0101-15-40K-BK-24D	15	4000	1155	77	24°	Black	580	34	70	0.64
NR-M3D0101-15-27K-BK-60D	15	2700	1110	74	60°	Black	580	34	70	0.64
NR-M3D0101-15-30K-BK-60D	15	3000	1155	77	60°	Black	580	34	70	0.64
NR-M3D0101-15-40K-BK-60D	15	4000	1155	77	60°	Black	580	34	70	0.64
NR-M3D0101-15-30K-WH-24D	15	3000	1155	77	24°	White	580	34	70	0.64
NR-DL106-15 DW	15	4000	1155	77	24°	White	580	34	70	0.64

Model No	P(W)	CCT(K)	Output (lm)	lm/w	Beam Angle	Color	Dimensions in mm			kg
							A	B	C	
NR-M3D0101-30-40K-BK-24D	30	4000	2190	73	24°	Black	1013	34	70	0.9
NR-M3D0101-6-27K-BK-24D	6	2700	414	69	24°	Black	149	34	70	0.17
NR-M3D0101-6-30K-BK-24D	6	3000	426	71	24°	Black	149	34	70	0.17
NR-M3D0101-6-40K-BK-24D	6	4000	426	71	24°	Black	149	34	70	0.17
NR-DL105-6 SW	6	2700	414	69	24°	White	149	34	70	0.17
NR-M3D0101-6-30K-WH-24D	6	3000	426	71	24°	White	149	34	70	0.17
NR-M3D0101-6-40K-WH-24D	6	4000	426	71	24°	White	149	34	70	0.17

Dimensions in mm

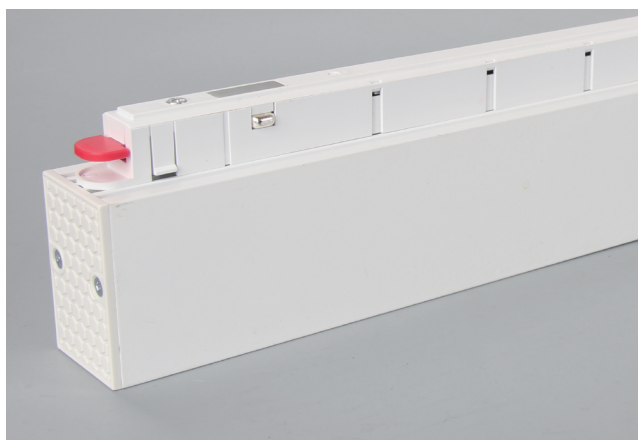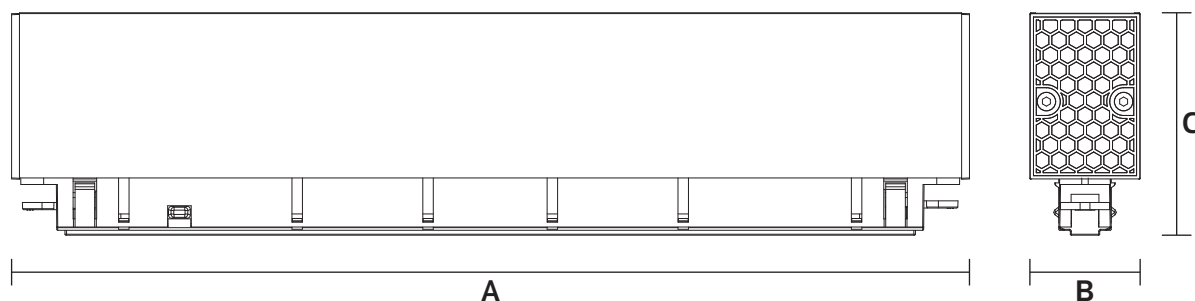

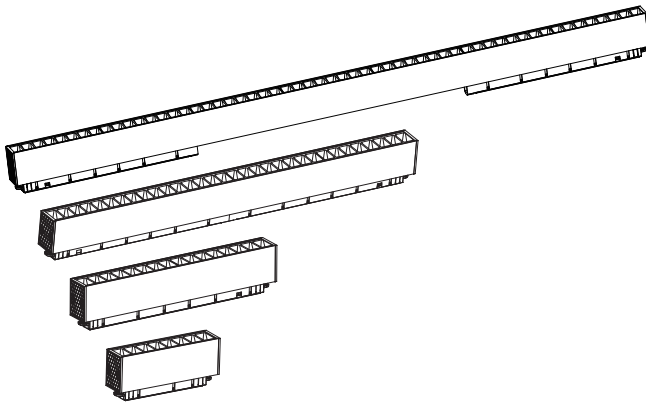


Description:
LED Magnetic Track System


Main material:
Aluminum+Pc

Specification:
Aluminum lamp body integrated die-casting molding, spraying process, fine work, waterproof and dustproof. High light transmission PC material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications
.Office
.Meeting room
.Sitting room

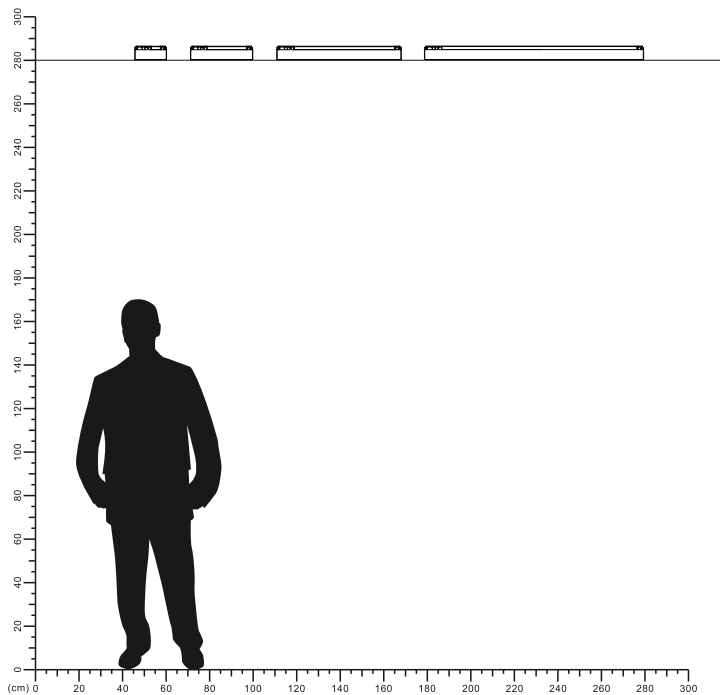


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

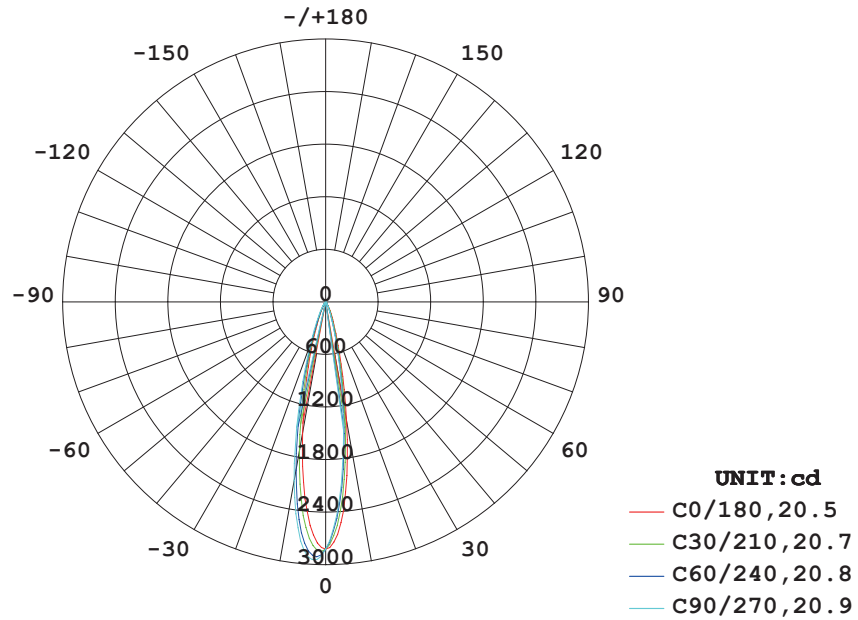


AVERAGE BEAM ANGLE (50%) : 20.7 DEG

Illuminance at a Distance

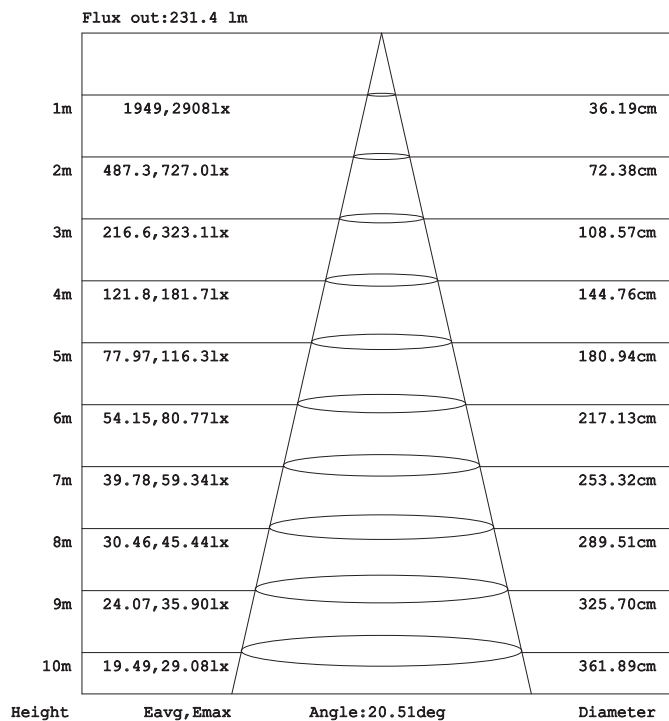


Model No: NR-M3D0101-6-24D

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

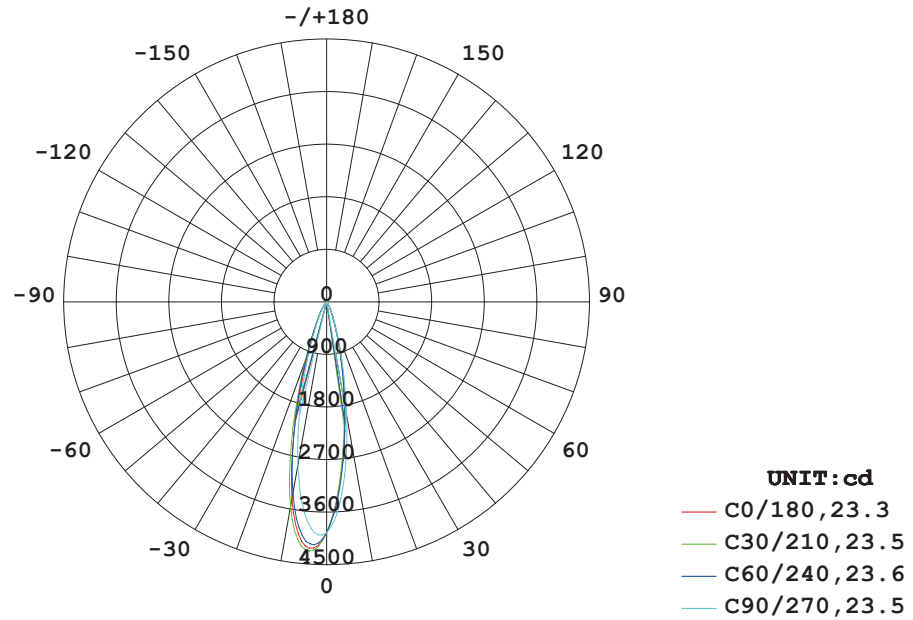


AVERAGE BEAM ANGLE (50%) : 23.5 DEG

Illuminance at a Distance

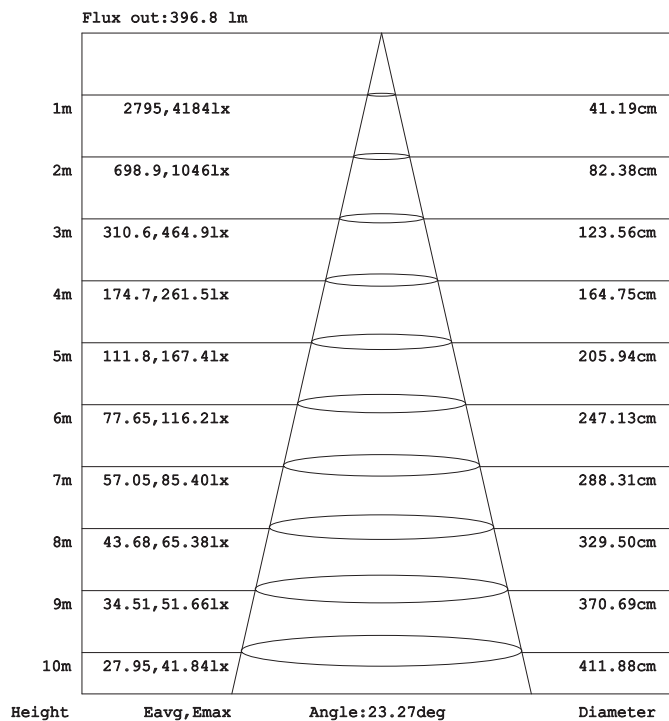


Model No:NR-M3D0101-10-24D

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

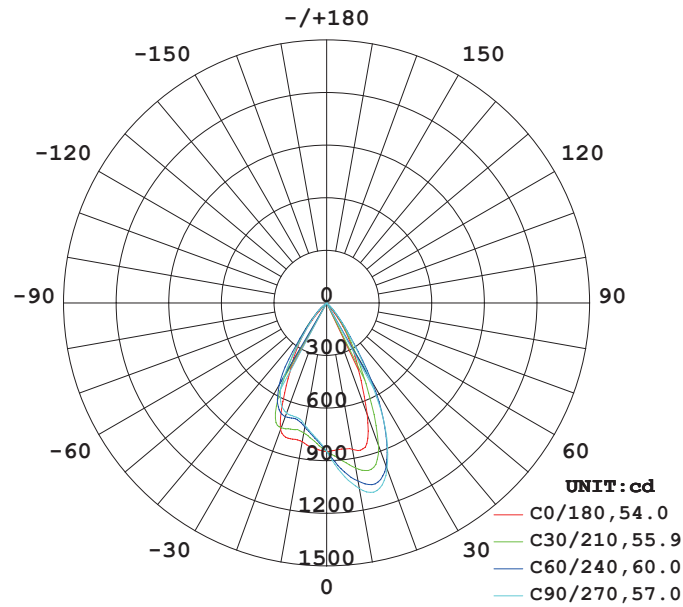


AVERAGE BEAM ANGLE (50%) : 56.7 DEG

Illuminance at a Distance

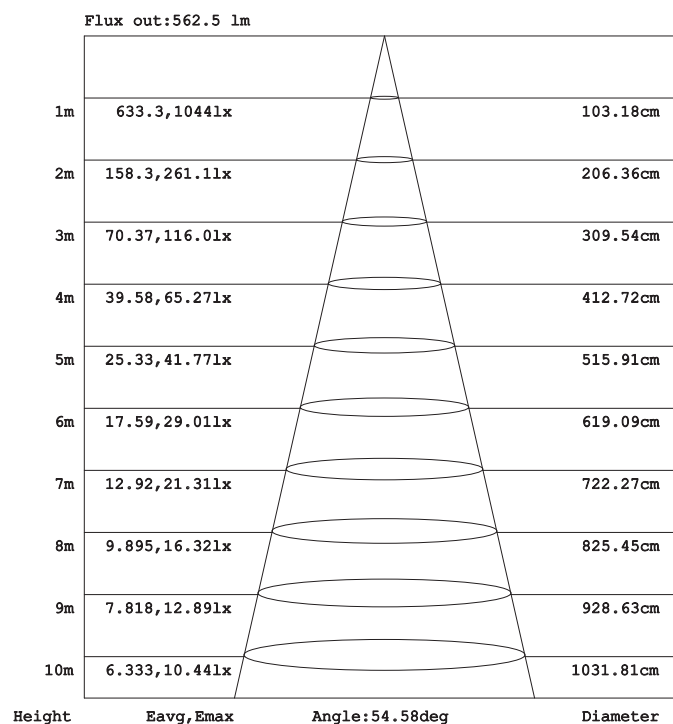


Model No: NR-M3D0101-10-60D

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

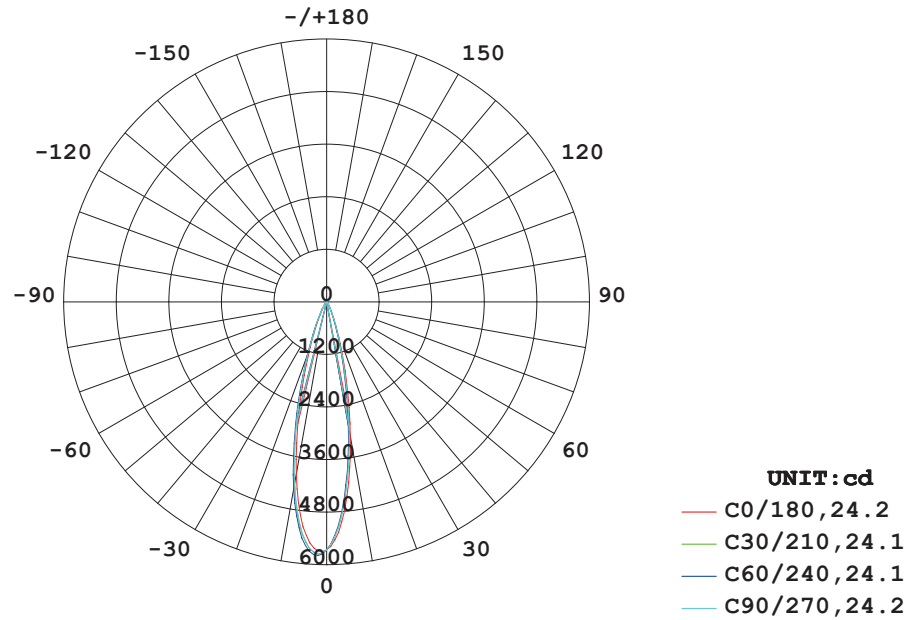


AVERAGE BEAM ANGLE (50%) : 24.2 DEG

Illuminance at a Distance

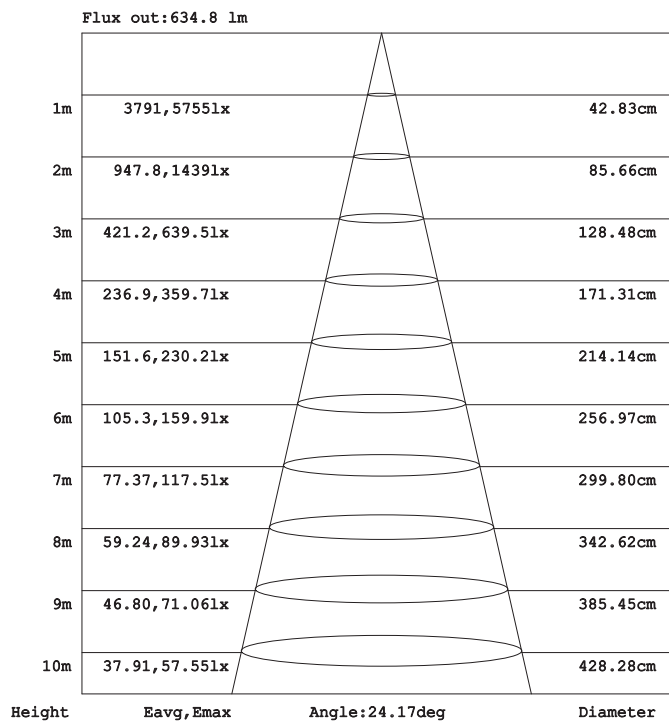


Model No: NR-M3D0101-15-24D

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

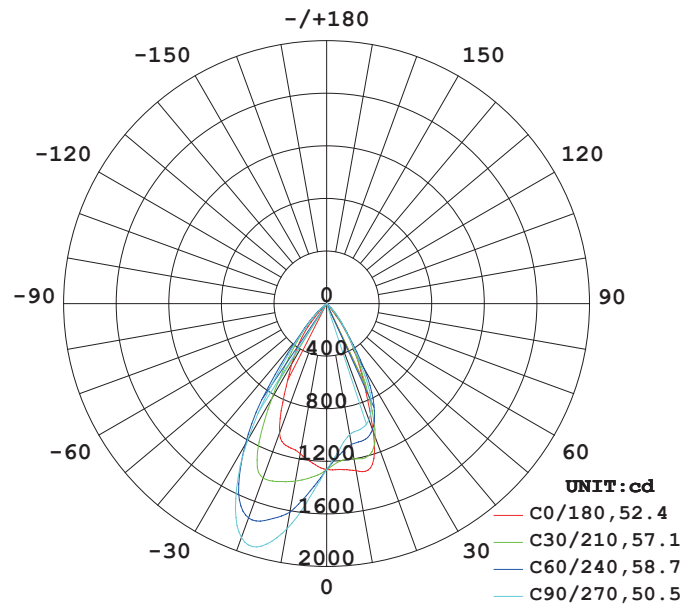


AVERAGE BEAM ANGLE (50%) : 54.7 DEG

Illuminance at a Distance

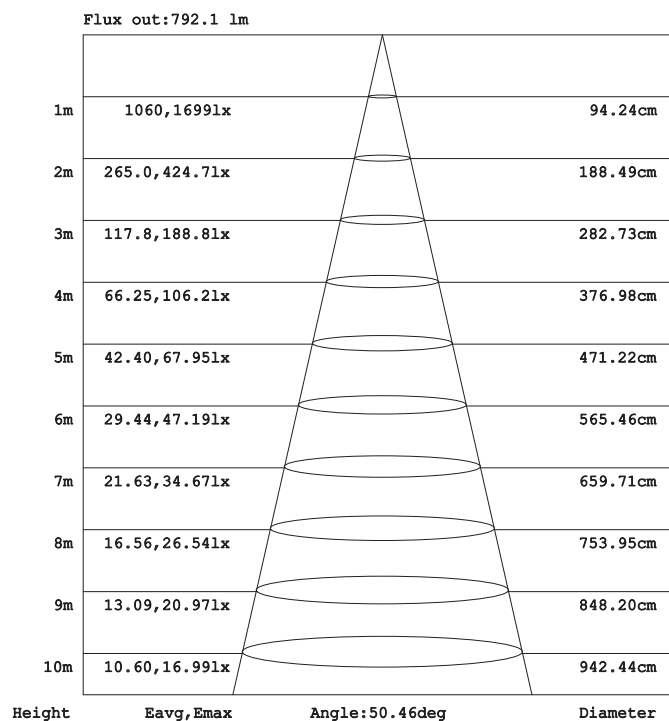


Model No: NR-M3D0101-15- 60D

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

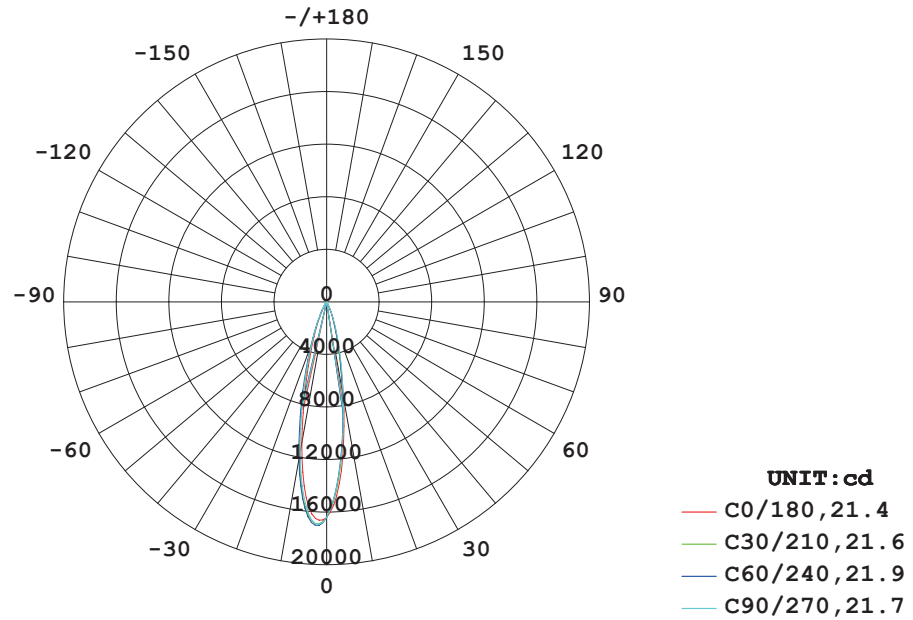

AVERAGE BEAM ANGLE (50%) : 21.6 DEG

Illuminance at a Distance

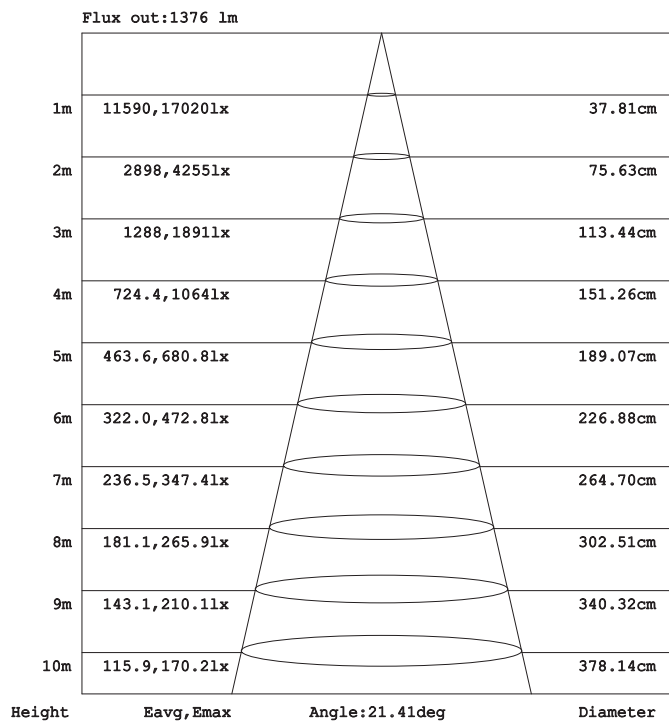

Model No: NR-M3D0101-30-24D

