


LED Magnetic Track System


NR-MCL0451-10 Series

IP20

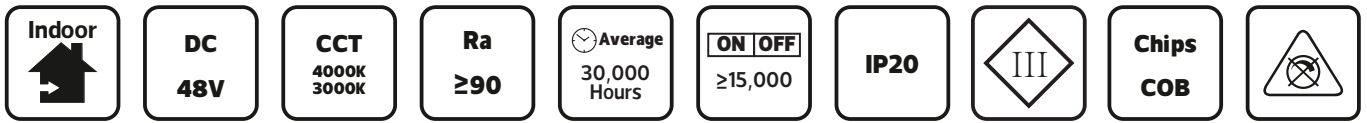


Model No	P(W)	CCT(K)	Output (lm)	lm/w	Beam Angle	Color	Dimensions in mm					kg
							A	B	C	D	E	
NR-MCL0451-10-30K-BK-24D	10	3000	710	71	24°	Black	1380	270	150	Φ41	23	0.53
NR-MCL0451-10-40K-BK-24D	10	4000	710	71	24°	Black	1380	270	150	Φ41	23	0.53
NR-MCL0451-10-30K-WH-24D	10	3000	710	71	24°	White	1380	270	150	Φ41	23	0.53
NR-MCL0451-10-40K-WH-24D	10	4000	710	71	24°	White	1380	270	150	Φ41	23	0.53
NR-MCL0451-10-30K-BK-36D	10	3000	710	71	36°	Black	1380	270	150	Φ41	23	0.53
NR-MCL0451-10-40K-BK-36D	10	4000	710	71	36°	Black	1380	270	150	Φ41	23	0.53
NR-MCL0451-10-30K-WH-36D	10	3000	710	71	36°	White	1380	270	150	Φ41	23	0.53
NR-MCL0451-10-40K-WH-36D	10	4000	710	71	36°	White	1380	270	150	Φ41	23	0.53
NR-MCL0501-10-40K-BK-36D	10	4000	700	70	36°	Black	1060	398	150	□40	23	0.33
NR-MCL0501-10-40K-WH-36D	10	4000	700	70	36°	White	1060	398	150	□40	23	0.33


Dimensions in mm

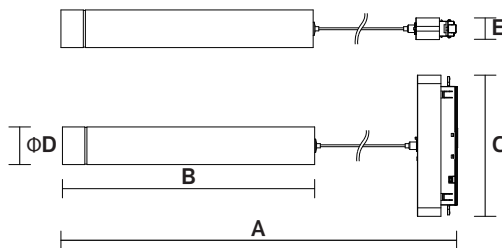

Model No:NR-MCL0451-10-30K
Model No:NR-MCL0451-10-40K

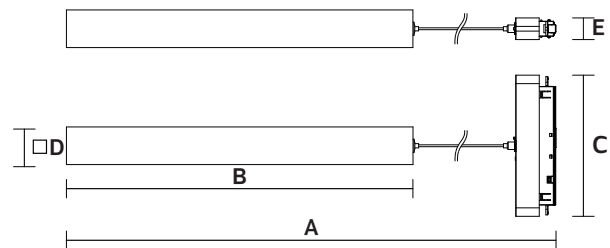

Model No:NR-MCL0501-10-40K

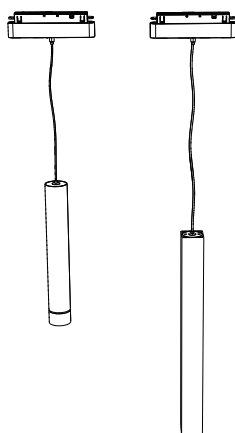


Description:
LED Magnetic Track System


Main material:
Aluminum+Pc

Specification:
Aluminum lamp body integrated die-casting molding, spraying process, fine work, waterproof and dustproof. High light transmission PC material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications
.Office
.Meeting room
.Sitting room

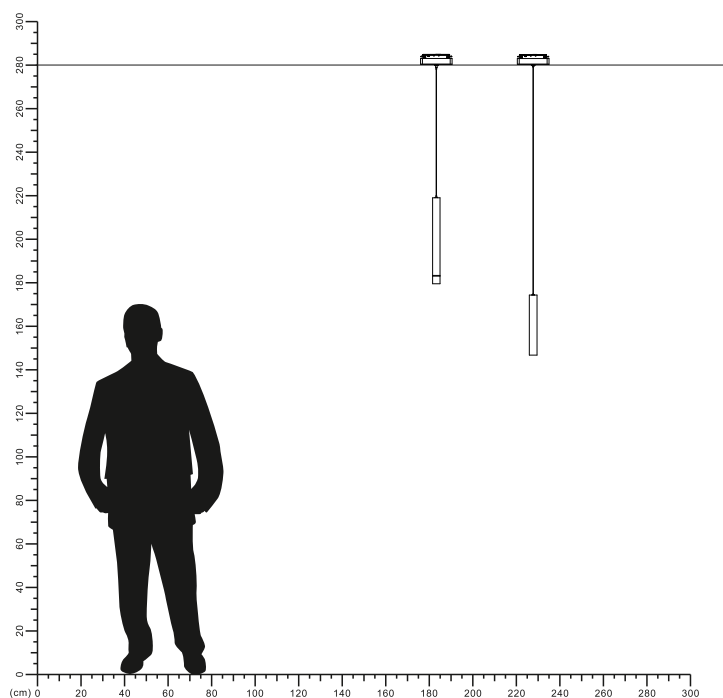


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

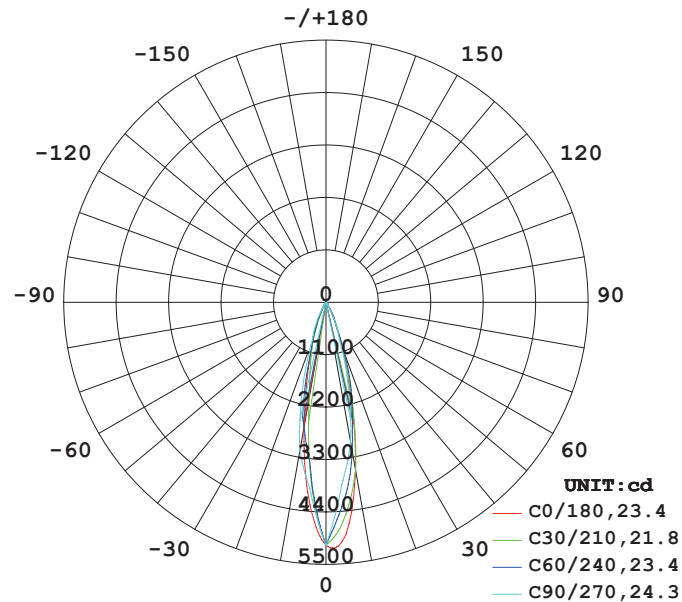


AVERAGE BEAM ANGLE (50%) : 23.2 DEG

Illuminance at a Distance

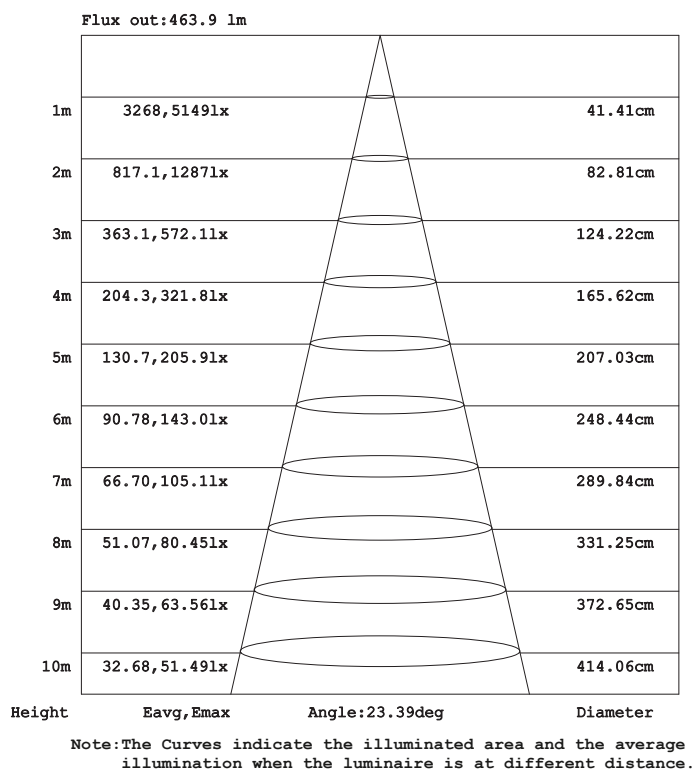


Model No: NR-MCL0451-10-30K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

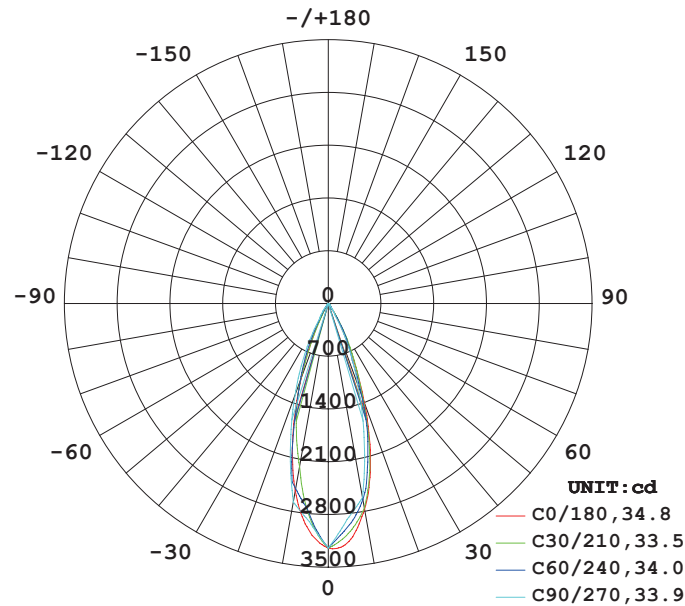

AVERAGE BEAM ANGLE (50%) : 34.1 DEG


Illuminance at a Distance

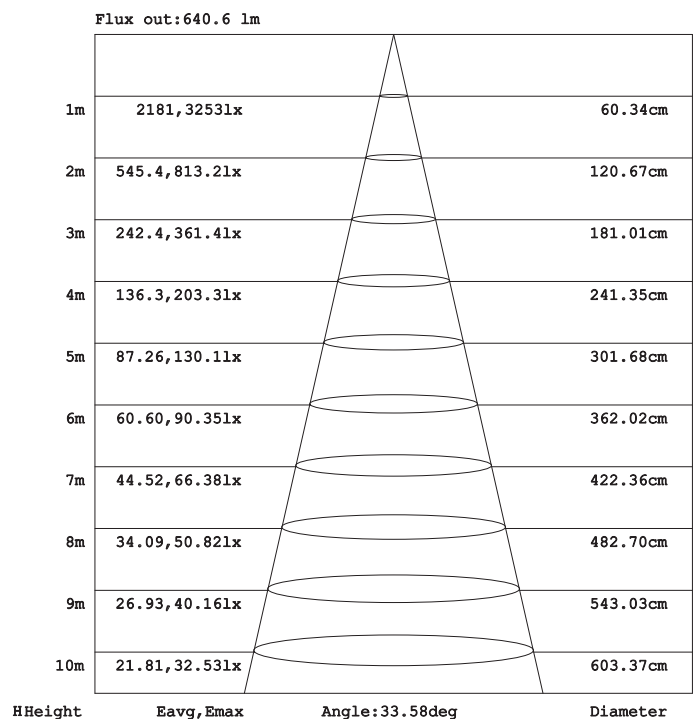

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Model No: NR-MCL0451-10-40K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

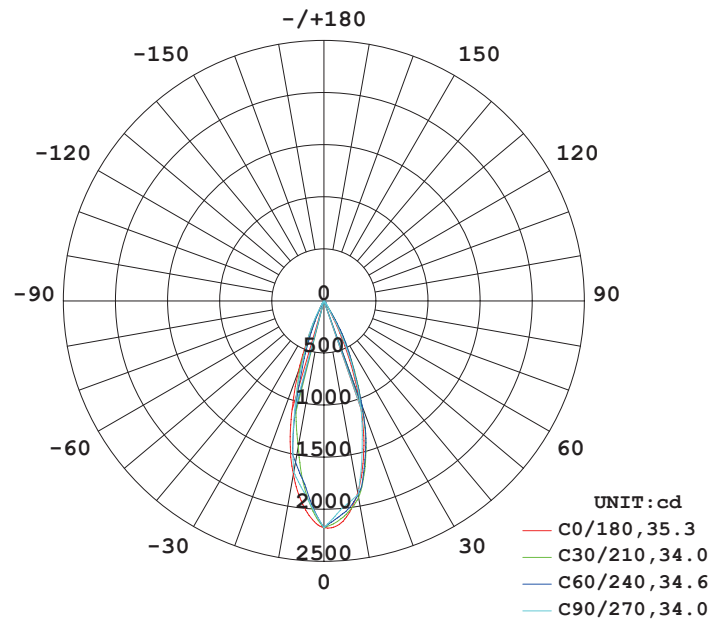



AVERAGE BEAM ANGLE (50%) : 34.5 DEG

Illuminance at a Distance

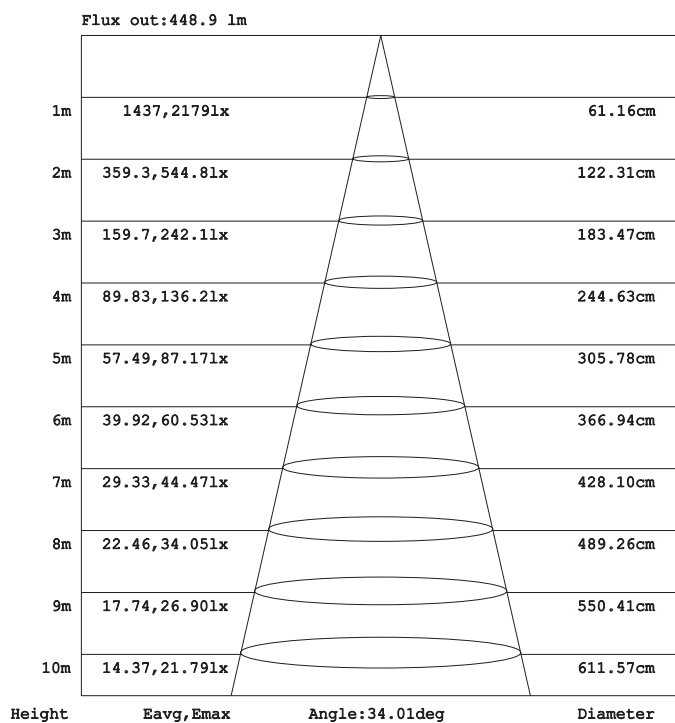


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model No: NR-MCL0501-10-40K

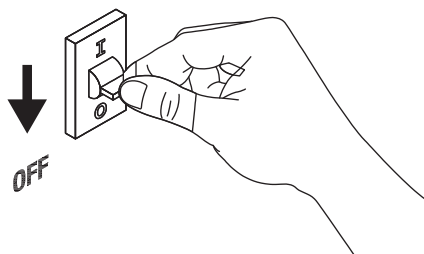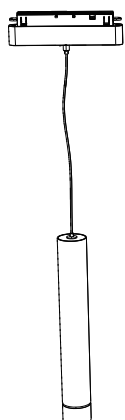


1

Turn off the power

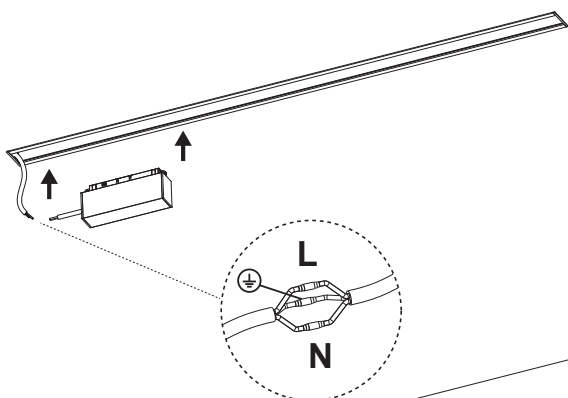


2

Terminals connect power cables and wrap terminals with waterproof tape

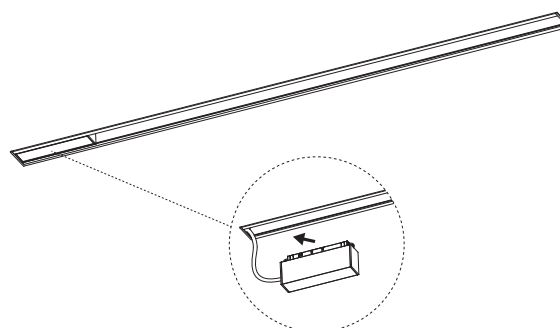


3

Install DC48V power supply

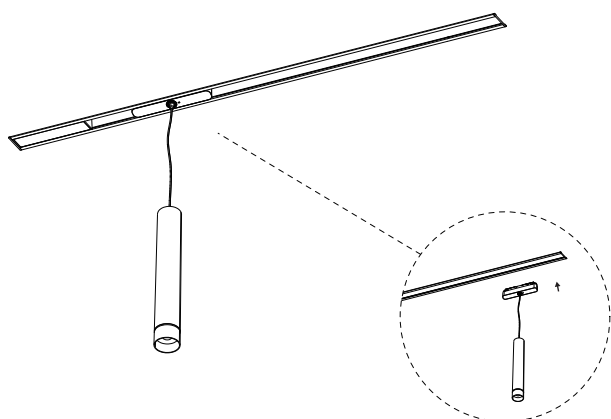

4

Install lamp the Installation is complete

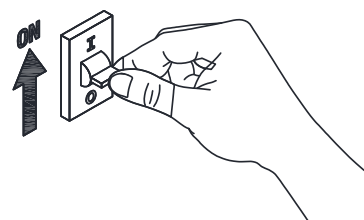

5

Turn on power

