










MINI LED DOWNLIGHT


NR-ML101 Series
IP20

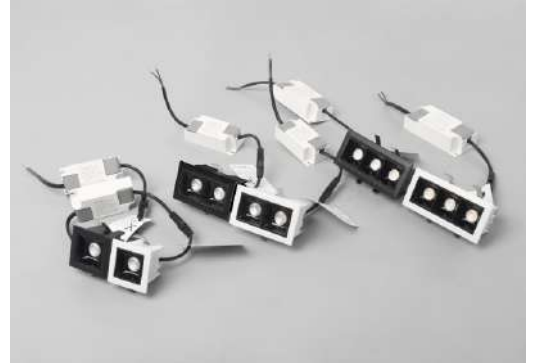

Item Code	P (W)	Color	Output (lm)	lm/w	Dimensions in mm			Hole Size (mm)	kg
					A	B	C		
NR-ML101-1-3	3	Black/White	210	70	44	44	40	36*36	0.07
NR-ML101-2-6	6	Black/White	390	65	75	44	43	36*68	0.14
NR-ML101-3-9	9	Black/White	585	65	95	44	40	36*85	0.13

Dimensions in mm



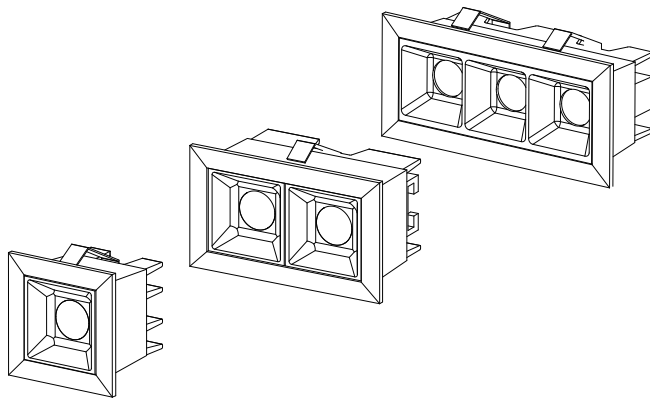


Description:
MINI LED DOWNLIGHT


Main material:
Die-cast aluminum+Engineering plastics

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP20

Applications
. Shopping mall
. Office buildings
. Exhibition hall

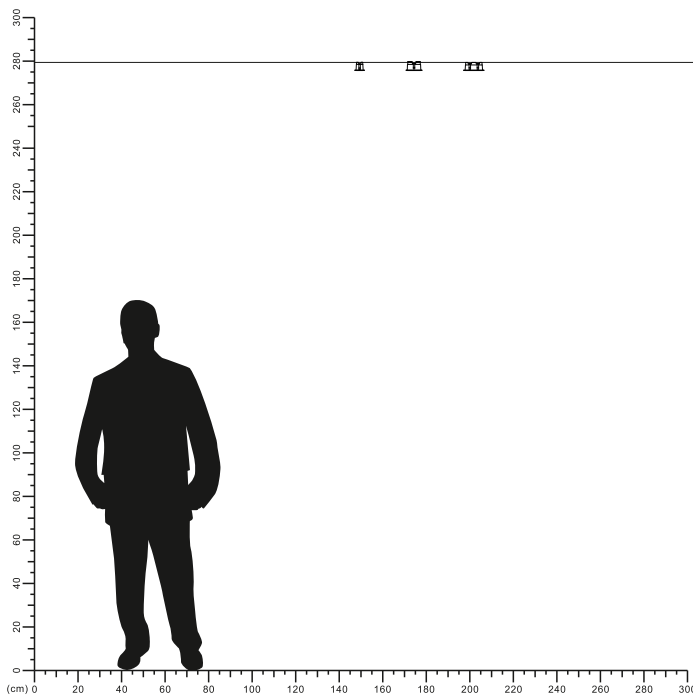


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

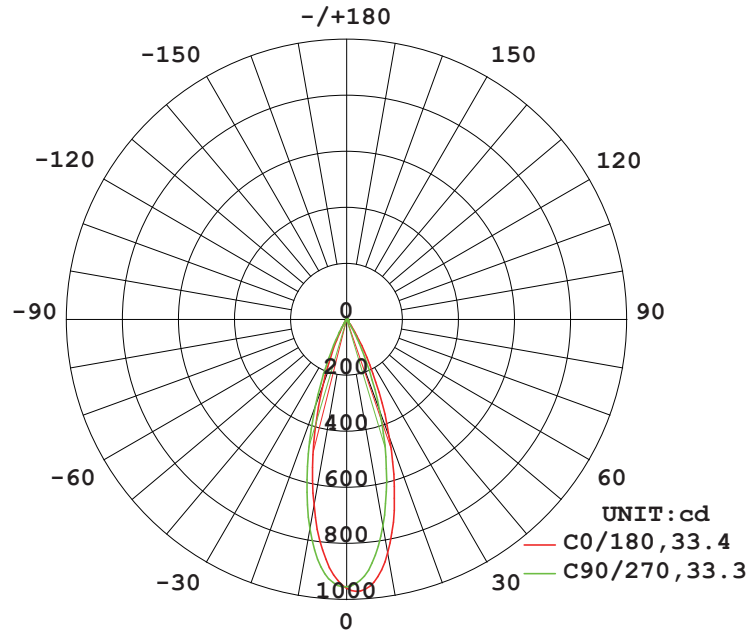

AVERAGE BEAM ANGLE (50%) : 33.3 DEG


Illuminance at a Distance

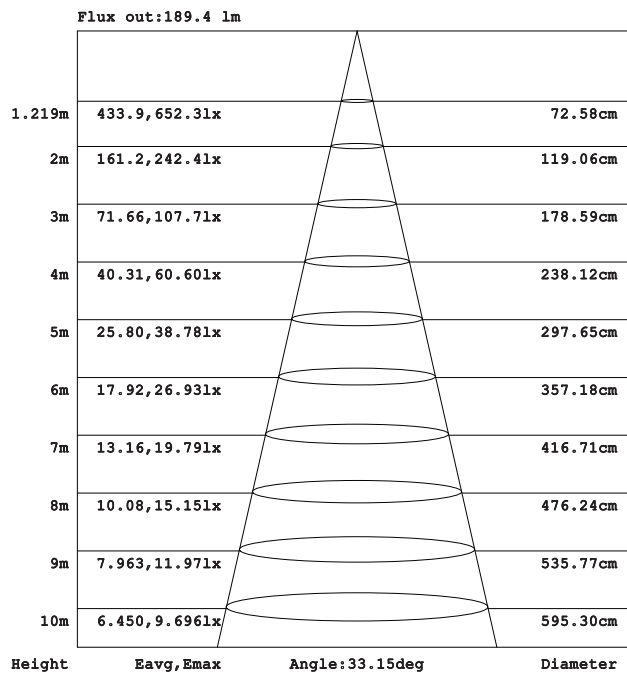

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Model:NR-ML101-1-3

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

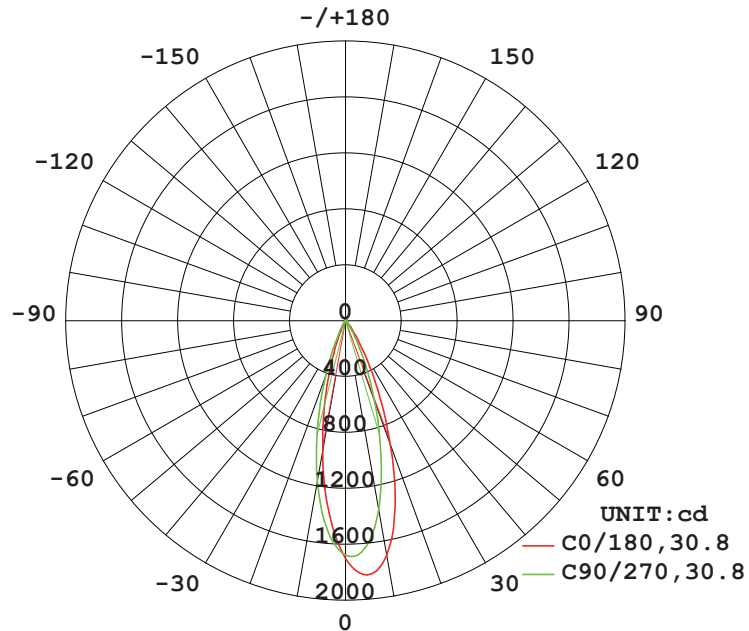

AVERAGE BEAM ANGLE (50%) : 30.8 DEG


Illuminance at a Distance

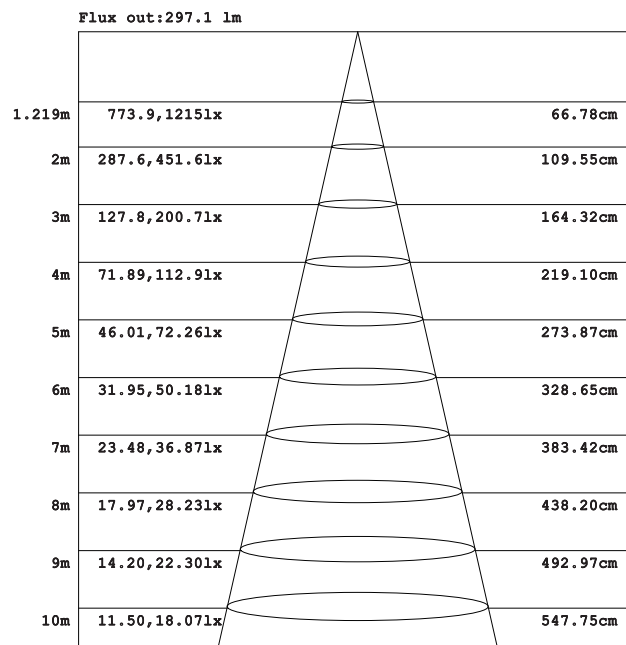

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Model:NR-ML101-2-6

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

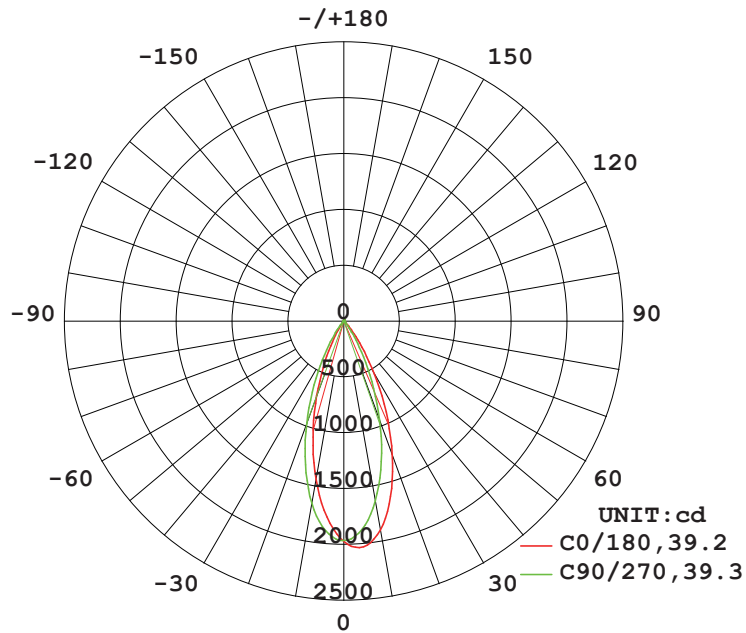



AVERAGE BEAM ANGLE (50%) : 39.3 DEG

Illuminance at a Distance

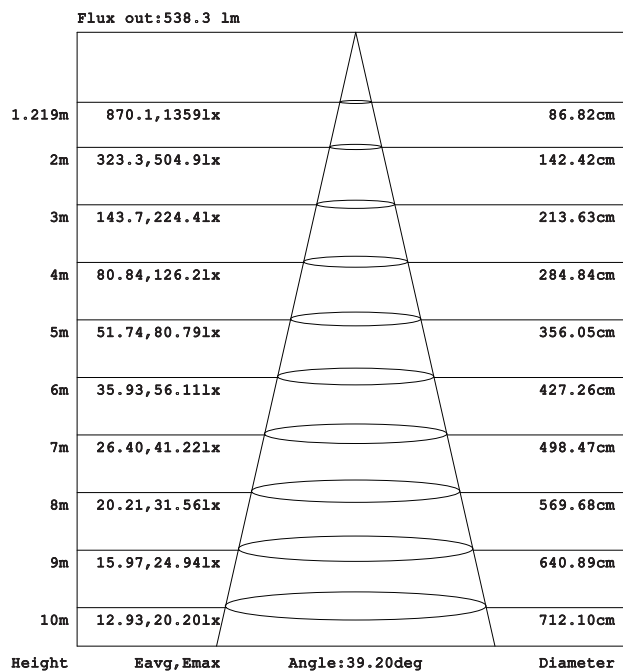


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model:NR-ML101-3-9

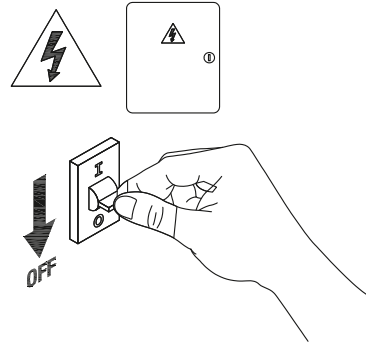


1

Turn off The Power




2

Cut a hole in the ceiling




3

Connect Cable




4

Wiring complete




5

Press two buckles into the ceiling

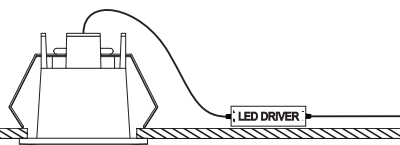

6

Installation completed

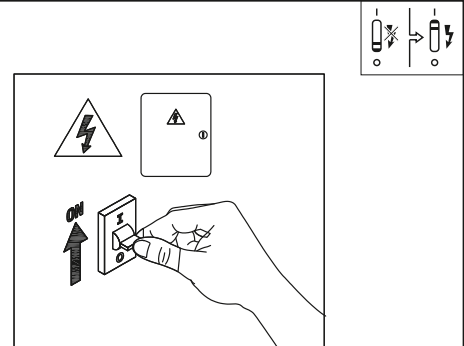

7

Turn on the power

