



LED Mini Magnetic Track System

NR-MMST0951 Series

IP20




Model No	P (W)	Using Track	CCT (K)	Output (lm)	lm/w	Color	kg
NR-MMST0951-6-30K-WH-100D	6	NR-ST	3000	180	30	Black	0.05
NR-MMST0951-12-30K-WH-100D	12	NR-ST	3000	360	30	Black	0.08



Dimensions in mm



Model No:NR-MMST0951-6-30K-WH-100D

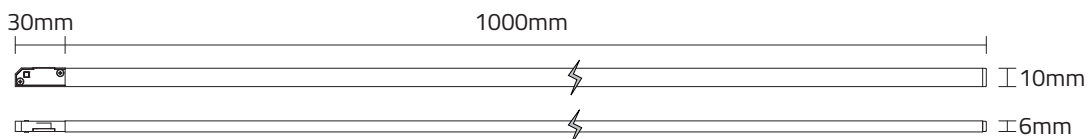

Model No:NR-MMST0951-12-30K-WH-100D

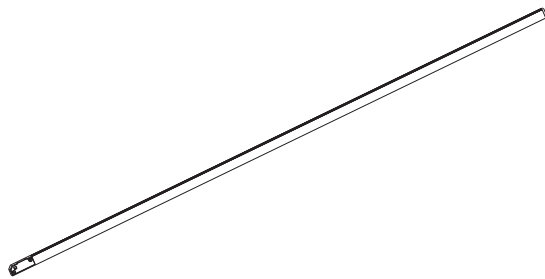
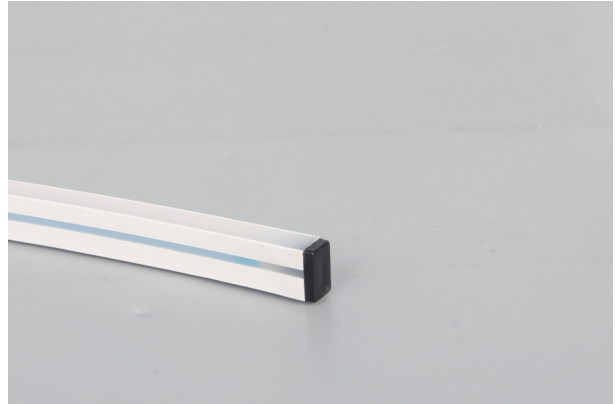


Description:
LED Mini Magnetic Track System


Main material:
Silicagel+Pc

Specification:
Silicone lamp belt soft light transmission, improve light refraction, gorgeous and charming.
PC bracket high tempera resistance, good flame retardant performance, safety security.
IP20

Applications
.Office
.Meeting room
.Sitting room

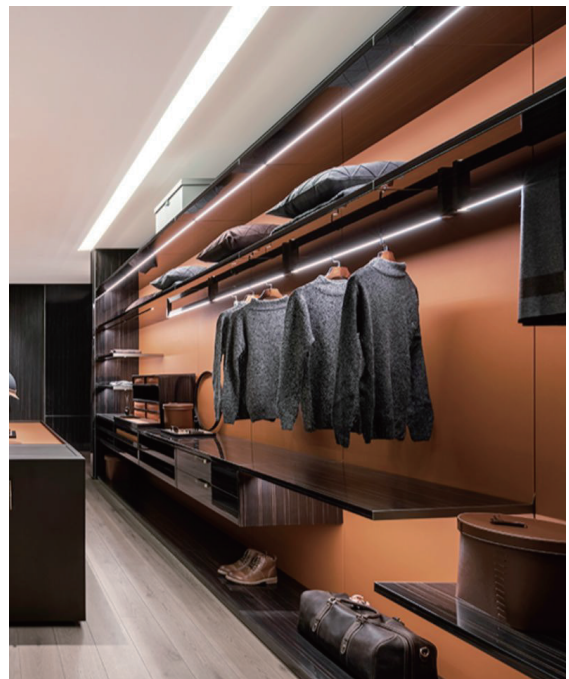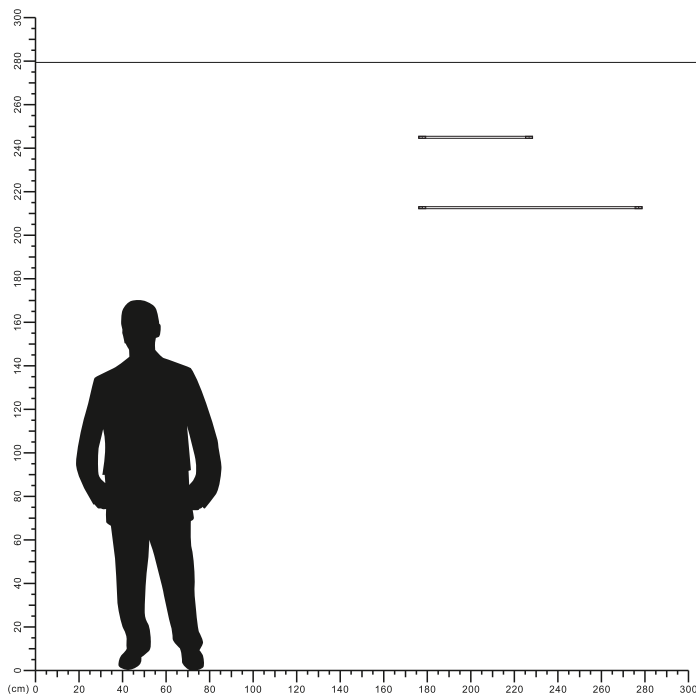


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

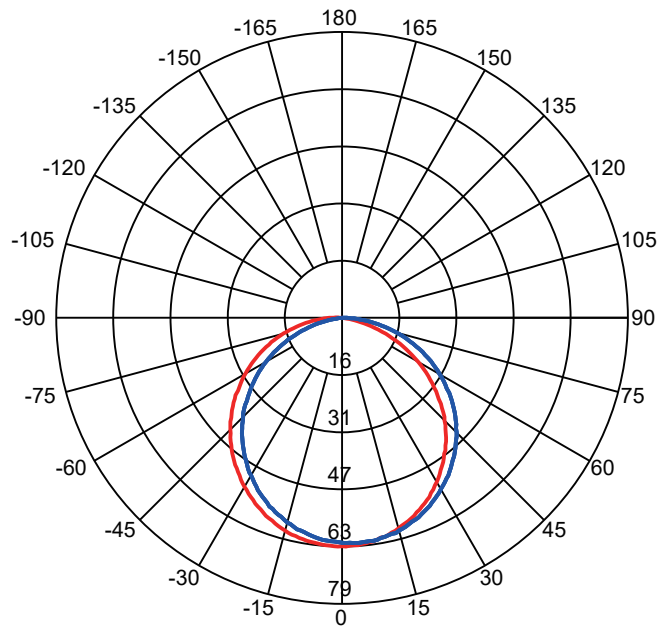


Beam Angle(50%) C0-180,C90-270: 112.4 deg,113.0 deg

C0-180 — C90-270 —

Illuminance at a Distance

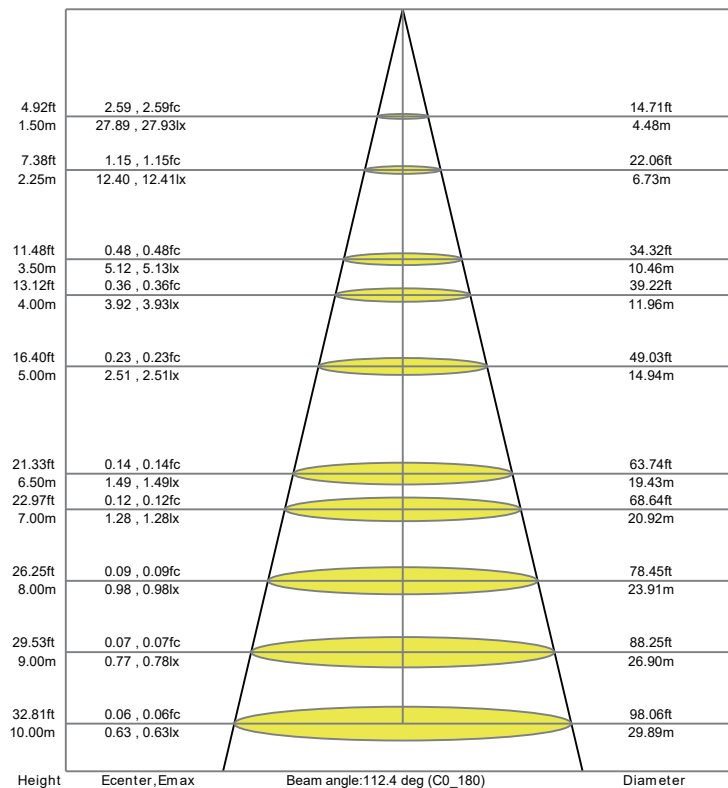


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

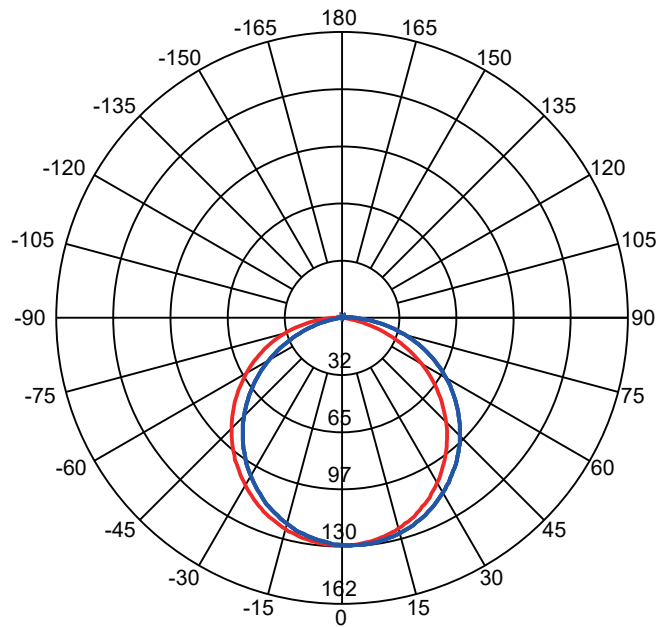


Beam Angle(50%) C0-180,C90-270: 113.3 deg,113.9 deg

C0-180 — C90-270 —


Illuminance at a Distance

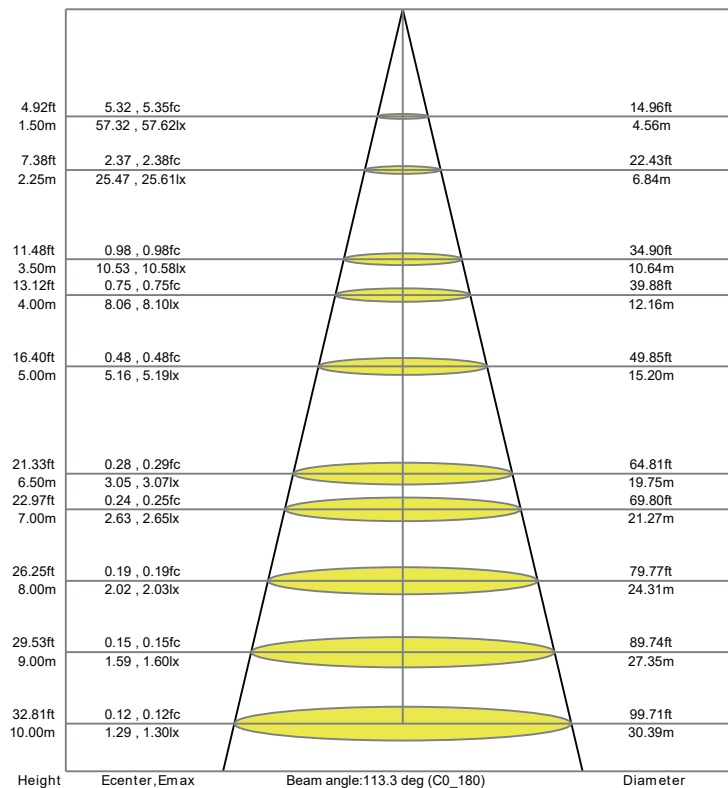

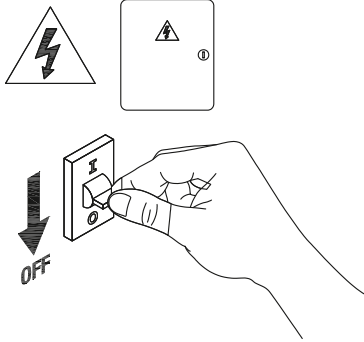


1

Turn off The Power

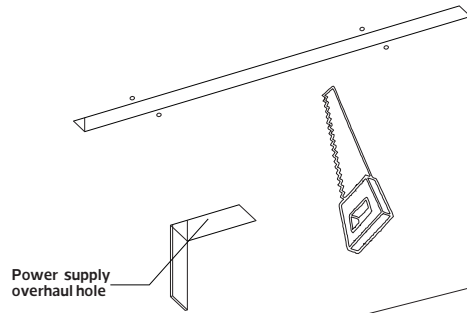


2

Cutting holes in and ceilings

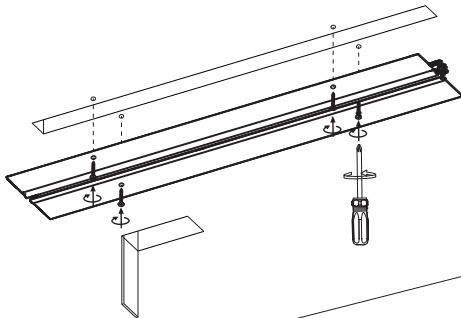


3

Install track

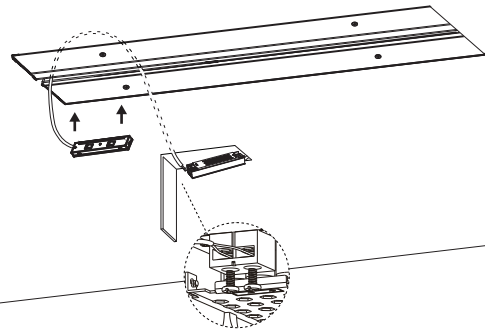


4

Connect the DC24V power supply,
cover good power supply cover

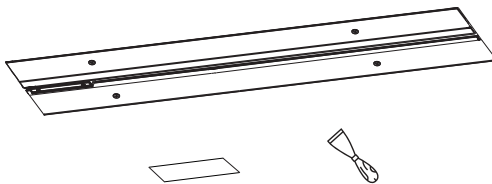


5

Fan ash to cover the track

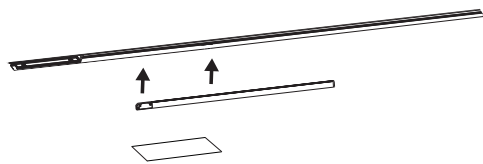


6

Install lamp body

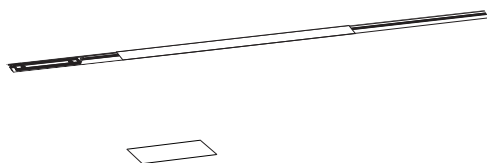

7

Installati on completed



8

Turn on the power

