




LED Mini Magnetic Track System


NR-MMTL0751-2-30K-BK-36D
NR-MMTL0752-5-30K-BK-36D
IP20



Model No	P (W)	Using Track	CCT (K)	Output (lm)	lm/w	Chips	Color	kg
NR-MMTL0751-2-30K-BK-36D	2	NR-ST	3000	120	60	SMD	Black	0.05
NR-MMTL0752-5-30K-BK-36D	5	NR-ST	3000	300	60	COB	Black	0.15

Dimensions in mm

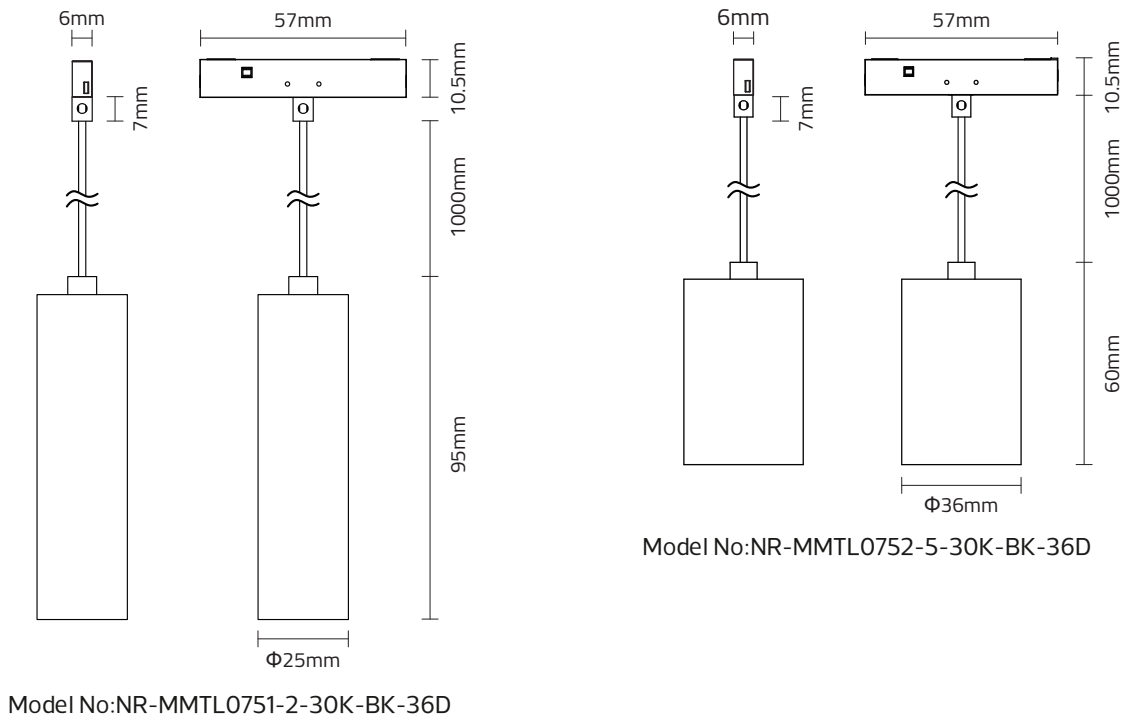

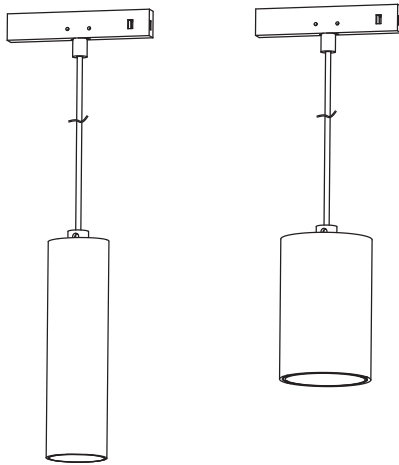


Description:
LED Mini Magnetic Track System


Main material:
Aluminum+Pc

Specification:
Aluminum lamp body, fine work,
corrosion rust prevention, durable.
High transmission Pc material lamp
shade, anti aging, long service life.
IP20

Applications
.Office
.Meeting room
.Sitting room

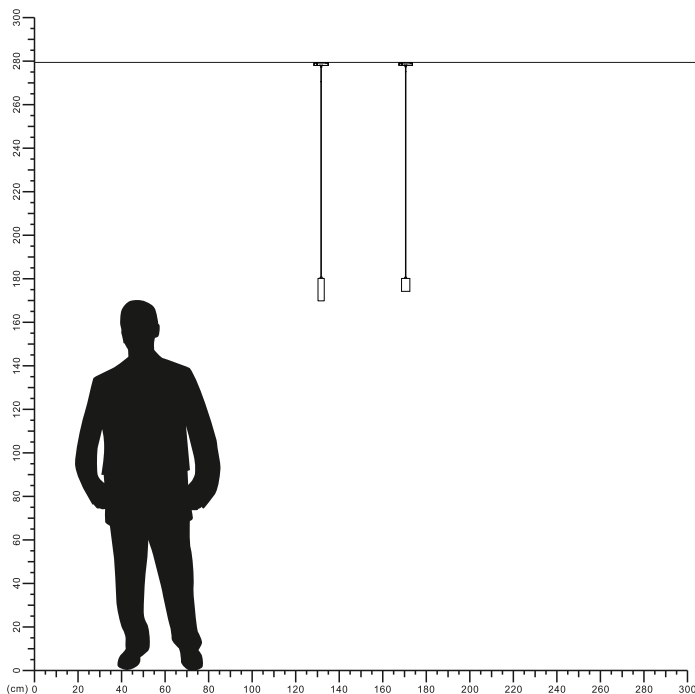


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

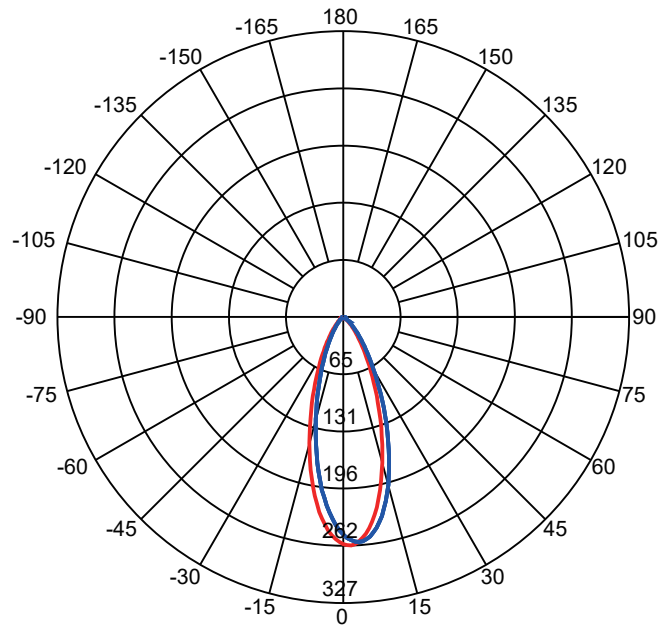


Beam Angle(50%) C0-180,C90-270: 36.3 deg,36.5 deg

C0-180 — C90-270 —

Illuminance at a Distance

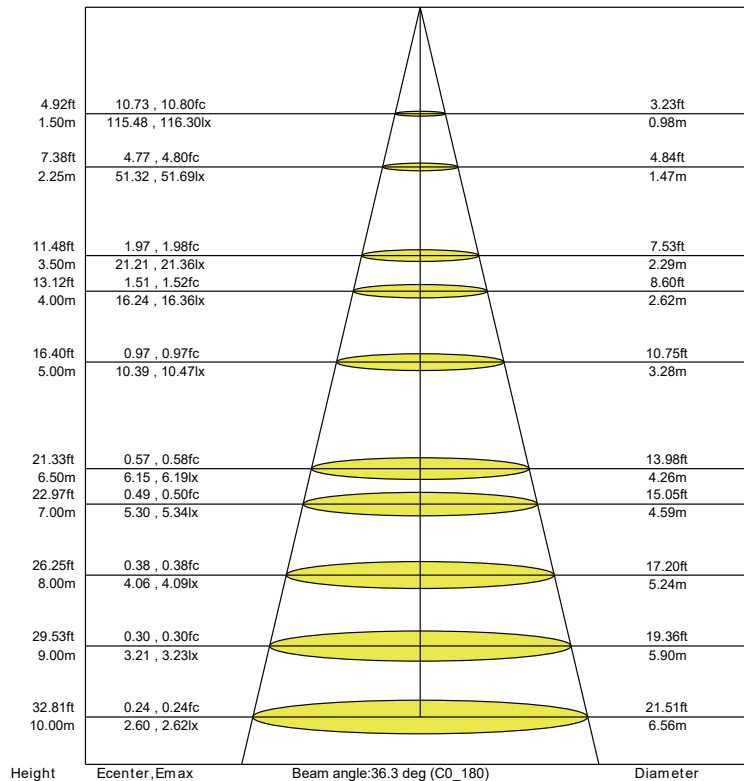

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

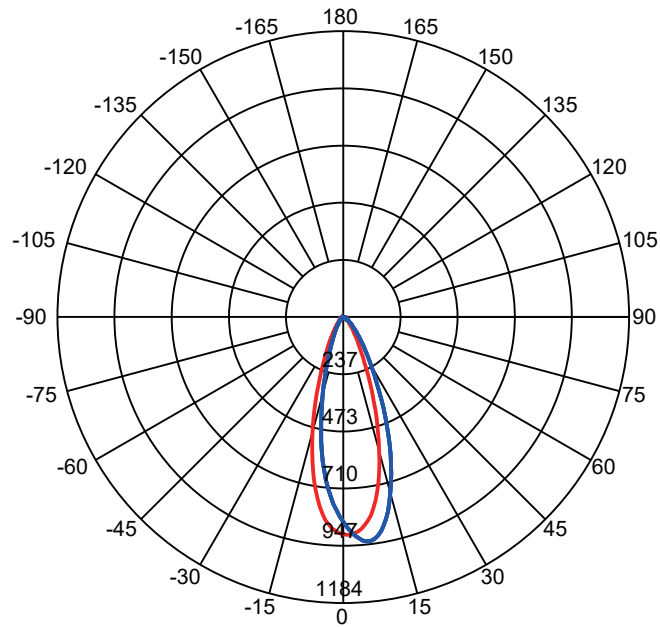

Beam Angle(50%) C0-180,C90-270: 33.9 deg,33.8 deg

C0-180 — C90-270 —

Illuminance at a Distance

