



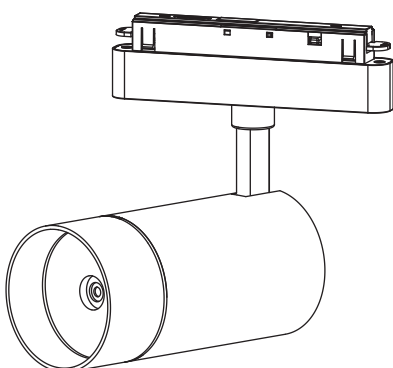


LED Magnetic Track System

NR-MTL0301-10-27K-BK-20D
IP20

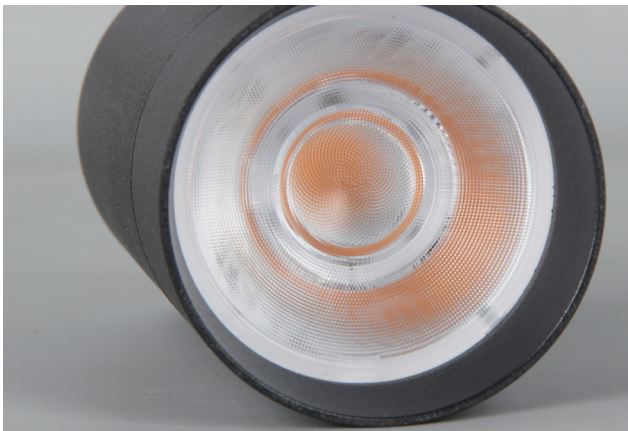

Model No	P(W)	CCT(K)	Output (lm)	lm/w	Beam Angle	Color	Dimensions in mm			
	A	B	C							
NR-MTL0301-10-27K-BK-20D	10	2700	680	68	20°	Black	150	Φ56	212	0.33
NR-TL105-10 WW	10	3000	710	71	20°	Black	150	Φ56	212	0.33
NR-MTL0301-10-40K-BK-20D	10	4000	710	71	20°	Black	150	Φ56	212	0.33
NR-MTL0301-10-30K-WH-20D	10	3000	710	71	20°	White	150	Φ56	212	0.33
NR-MTL0301-10-40K-WH-20D	10	4000	710	71	20°	White	150	Φ56	212	0.33
NR-MTL0301-10-27K-BK-36D	10	2700	680	68	36°	Black	150	Φ56	212	0.33
NR-MTL0301-10-30K-BK-36D	10	3000	710	71	36°	Black	150	Φ56	212	0.33
NR-MTL0301-10-40K-BK-36D	10	4000	710	71	36°	Black	150	Φ56	212	0.33
NR-MTL0301-10-30K-WH-36D	10	3000	680	68	36°	White	150	Φ56	212	0.33
NR-MTL0301-10-40K-WH-36D	10	4000	710	71	36°	White	150	Φ56	212	0.33
NR-TL105-15 SW	15	2700	1110	74	36°	Black	150	Φ75	240	0.53
NR-TL104-15 WW	15	3000	1155	77	36°	Black	150	Φ75	240	0.53
NR-TL104-15 DW	15	4000	1155	77	36°	Black	150	Φ75	240	0.53

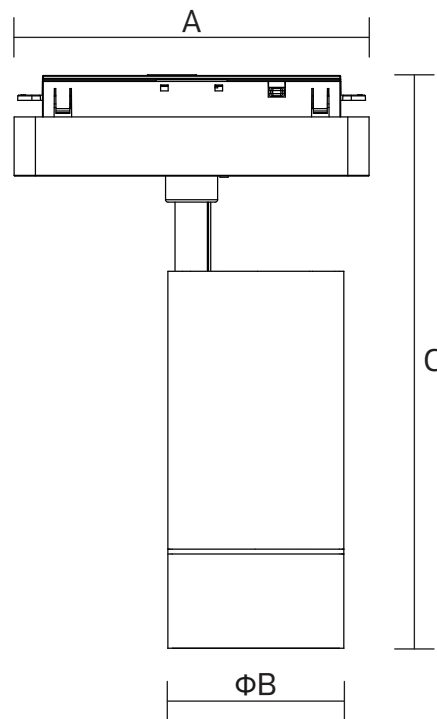


Description:
LED Magnetic Track System


Main material:
Aluminum+Pc

Specification:
Aluminum lamp body integrated die-casting molding, spraying process, fine work, waterproof and dustproof. High light transmission PC material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications
.Office
.Meeting room
.Sitting room

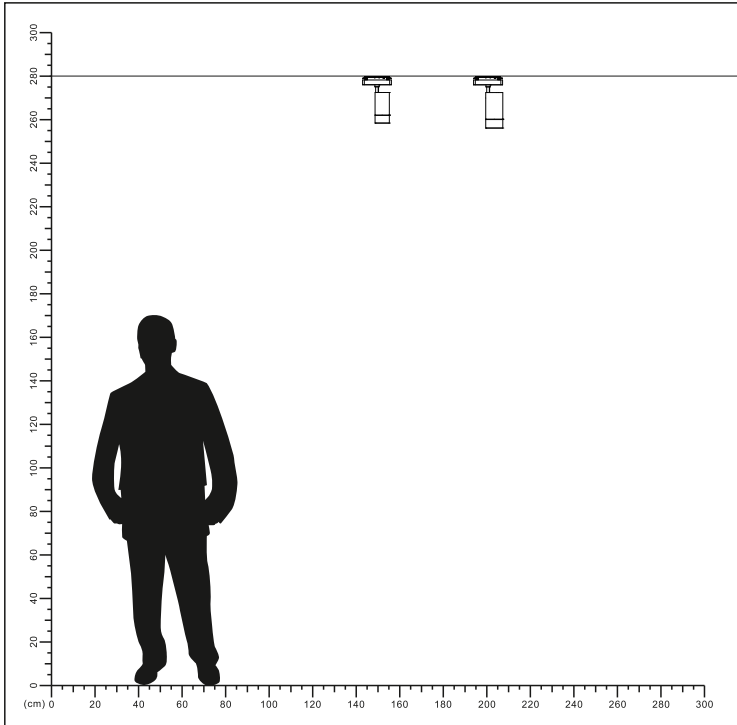


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

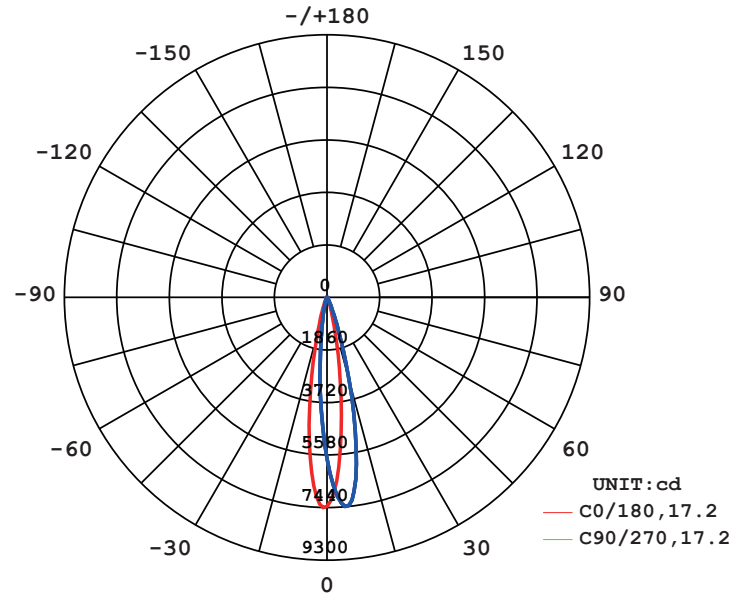

AVERAGE BEAM ANGLE (50%) : 17.2 DEG


Illuminance at a Distance

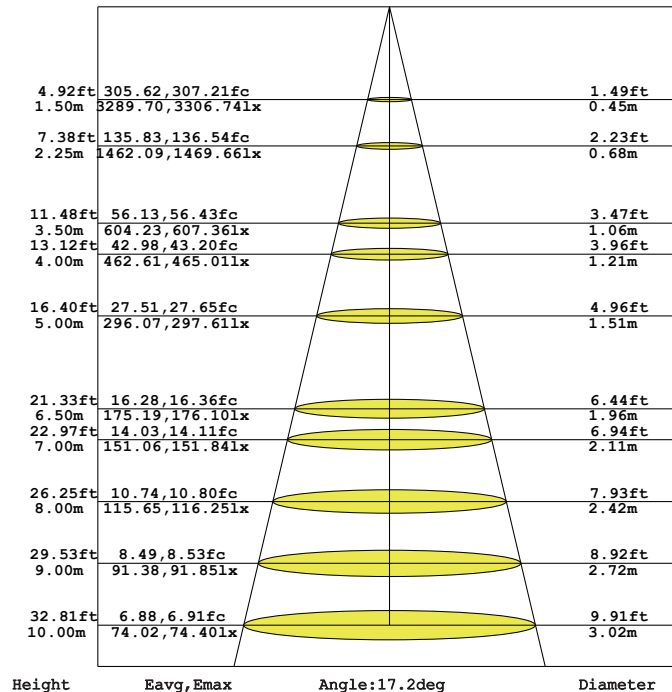

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Model No: NR-MTL0301-10-40K-BK-20D

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

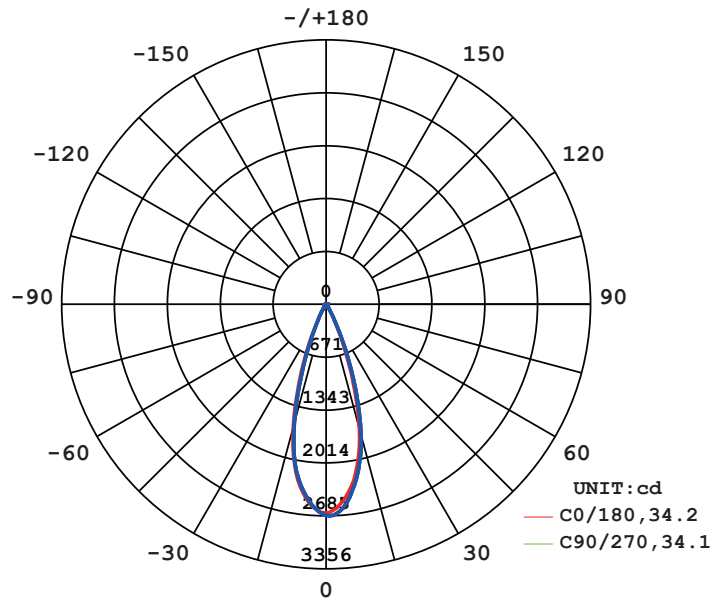

AVERAGE BEAM ANGLE (50%) : 34.2 DEG


Illuminance at a Distance

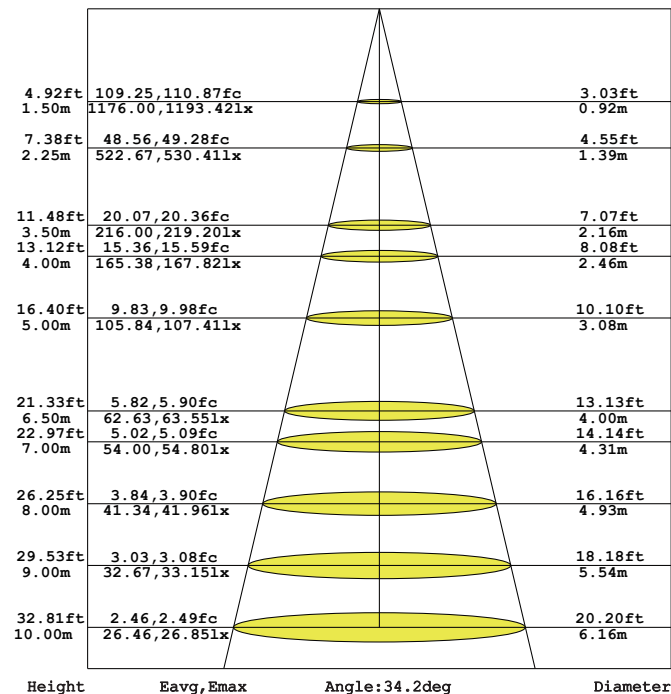

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Model No: NR-MTL0301-10-40K-WH-36D

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

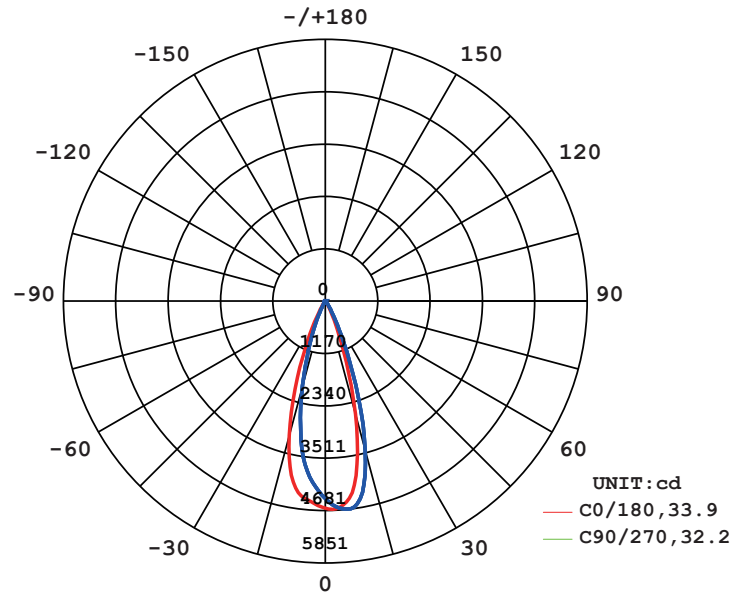



AVERAGE BEAM ANGLE (50%) : 33.9 DEG

Illuminance at a Distance

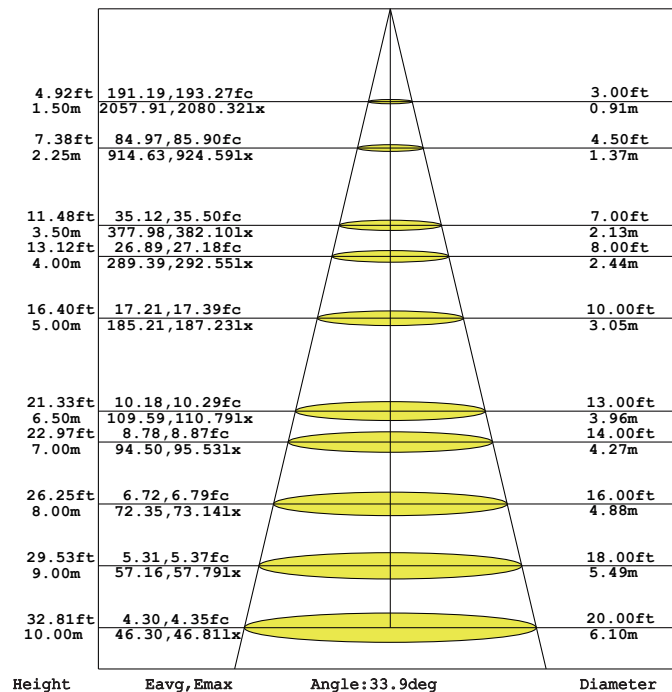


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model No: NR-TL104-15 DW

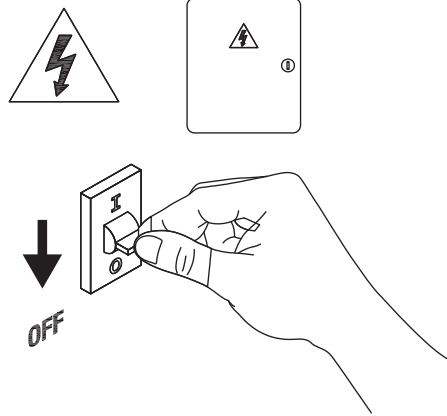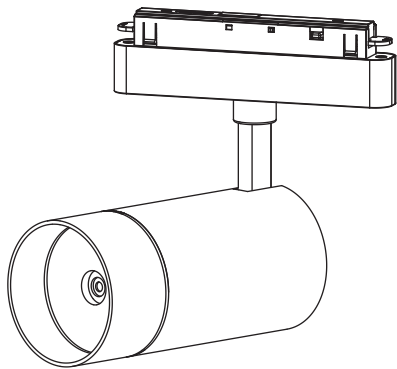


1

Turn off the power

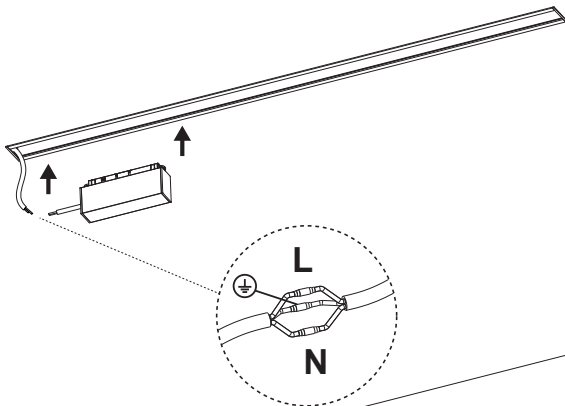


2

Terminals connect power cables and wrap terminals with waterproof tape

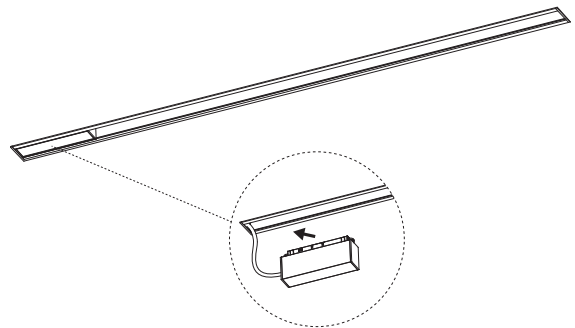


3

Install DC48V power supply

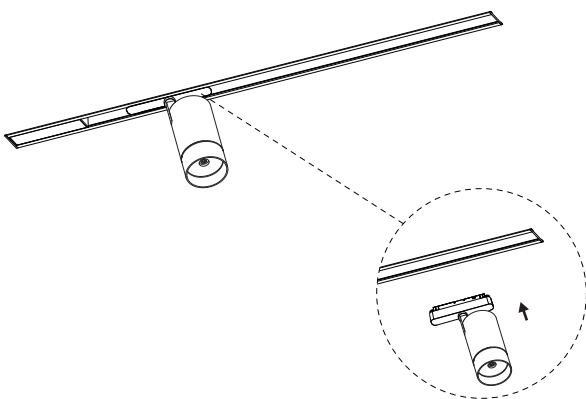

4

Install lamp the Installation is complete

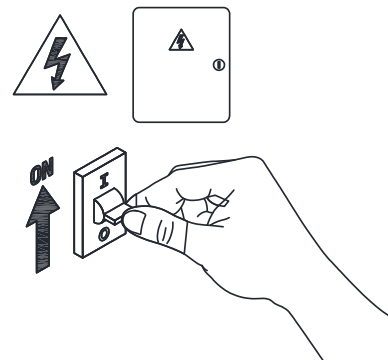

5

Turn on power

