



LED Neon Strip Light


NR-NE48-1217 Series


IP67

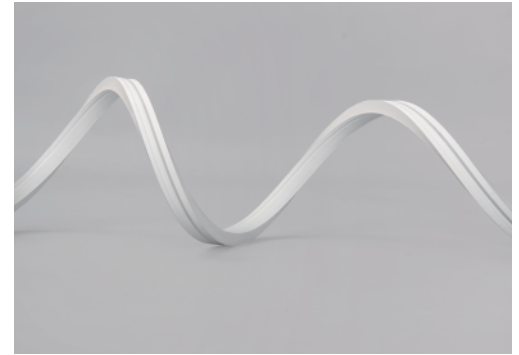

Item Code	Input Voltage	Watt	Ra	Lm/M	Cutting	LED QTY	LED Type	Beam Angle	IP	CCT
NR-NE48-1217-5W	DC48V	5W/M	≥90	200lm/m	100mm	120Pcs	SMD	120°	IP67	3000K/4000K
NR-NE48-1217-9W	DC48V	9W/M	≥90	360lm/m	100mm	120Pcs	SMD	120°	IP67	3000K/4000K

Dimensions in mm

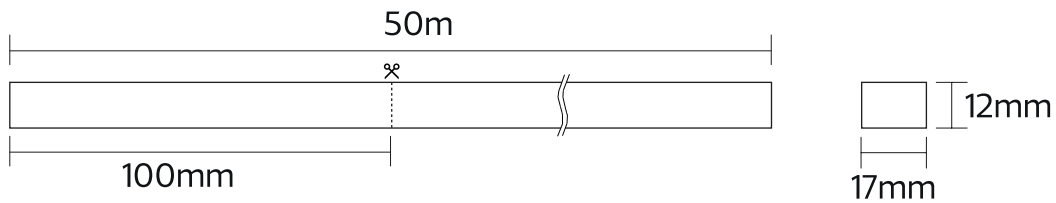

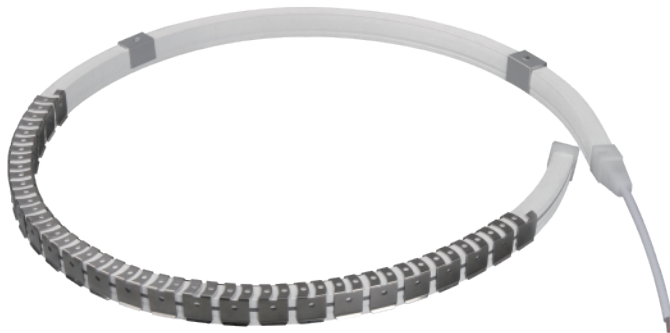

Description:

LED Neon Strip Light

Main material:


Silica gel

Specification:





Energy saving, up to 85% energy saving comparing to standard halogen and in candescent lamps Long life, up to 30,000 hours High quality light, High color rending, less heat.

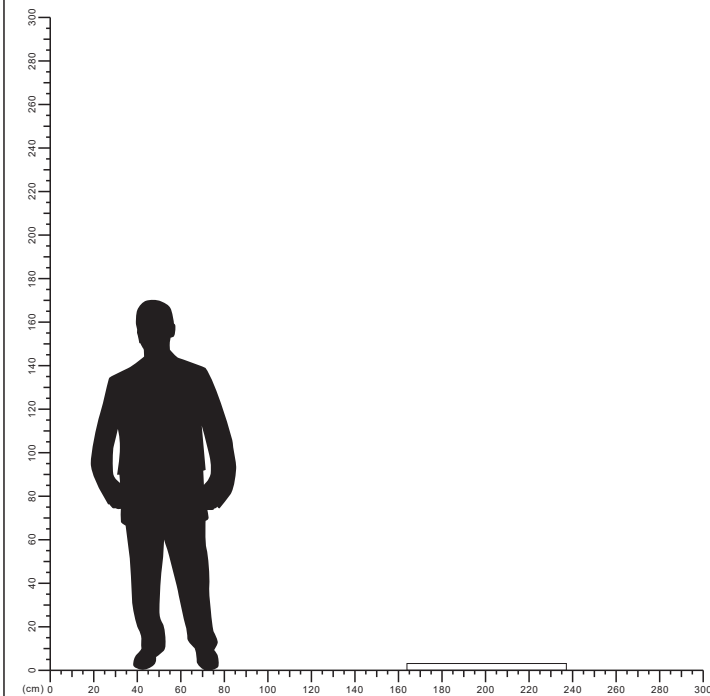Applications


- .Signboard
- .The ceiling
- .Building external wall




Accessories

Picture	Item Code	Size
	NR-NE48-1217-CONNECT	8*16
	NR-NE48-1217-CLIPS-MOV	10*20
	NR-NE48-1217-CLIPS	10*20
	NR-NE48-1217-CAP	10*18

POLAR AND CONE DIAGRAM

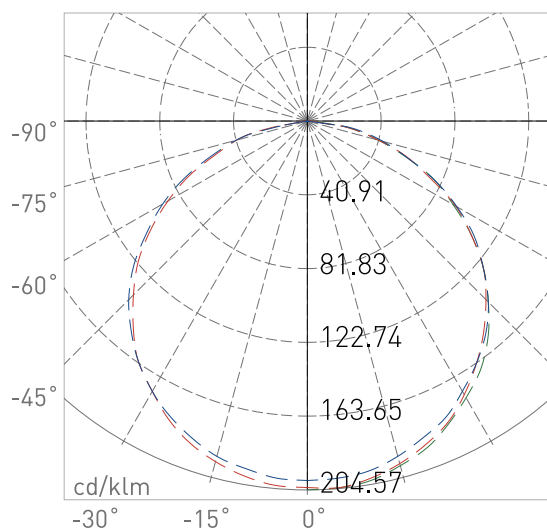

PHOTOMETRIC OF 1M STRIP

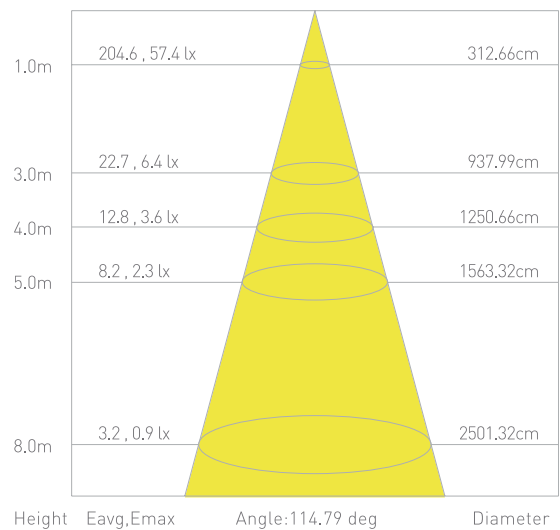

LED Strip Power Supply

Item Code	Input Voltage(AC)	Input Current(A)	Output Voltage(DC)	Output Current(A)	IP	Watt
NRP-PS102-FliKer-48V-150W-IP65	100-240V	1.5A	48V	3.2A	65	150
NRP-PS102-FliKer-48V-300W-IP65	180-240V	1.67A	48V	6.25A	65	300
NRP-PS102-FliKer-48V-400W-IP65	180-240V	2.2A	48V	8.33A	65	400



NOTE:the power supply should not exceed 80% of the rated power for long periods of time!



NRP-PS102-FliKer-48V-150W-IP65




NRP-PS102-FliKer-48V-300W-IP65



NRP-PS102-FliKer-48V-400W-IP65

Minimum bending radius and luminous surface.

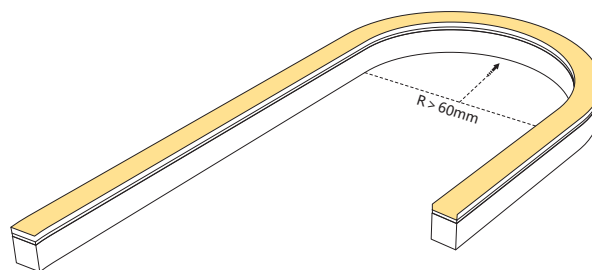

 Luminous surface

