LED OUTDOOR WALL LAMP


NR-OWL0002-12-30K-BK-120D
IP65



Outdoor | AC 220-240V | 50/60 Hz | PF >0.5 | CCT 3000K | Ra ≥80 | IP65 | Beam Angel 120° | Chips SMD


Model No	P(W)	CCT(K)	Output (lm)	lm/w	Dimensions in mm A	B	C	kg
NR-OWL0002-12-30K-BK-120D	12W	3000K	960lm	80	143	100	243	1

Dimensions in mm

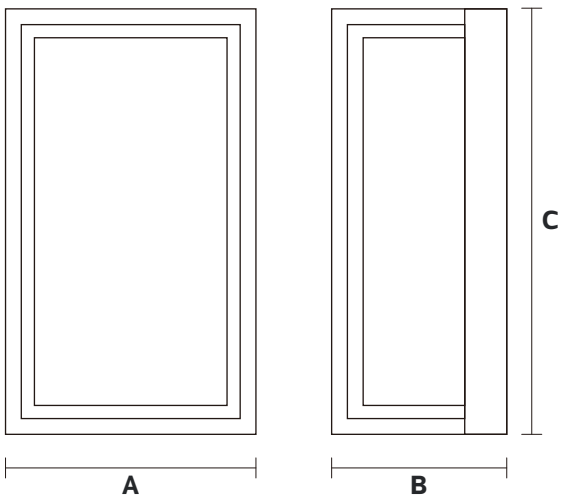





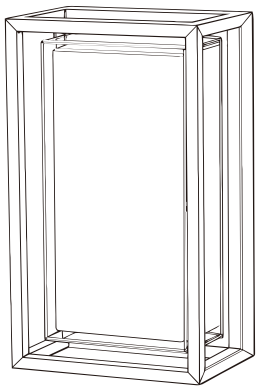


Description:
LED OUTDOOR WALL LAMP

Main material:
Aluminum+PC


Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rending, less heat, no UV or IR radiation
Build-in LED Driver
IP65

Applications
. ParK
. Square
. Tourist attraction
. Corridor

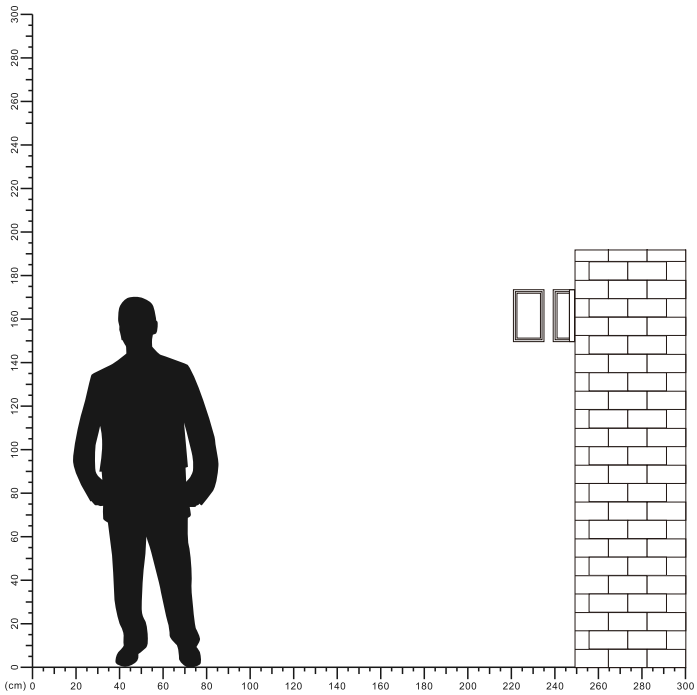




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

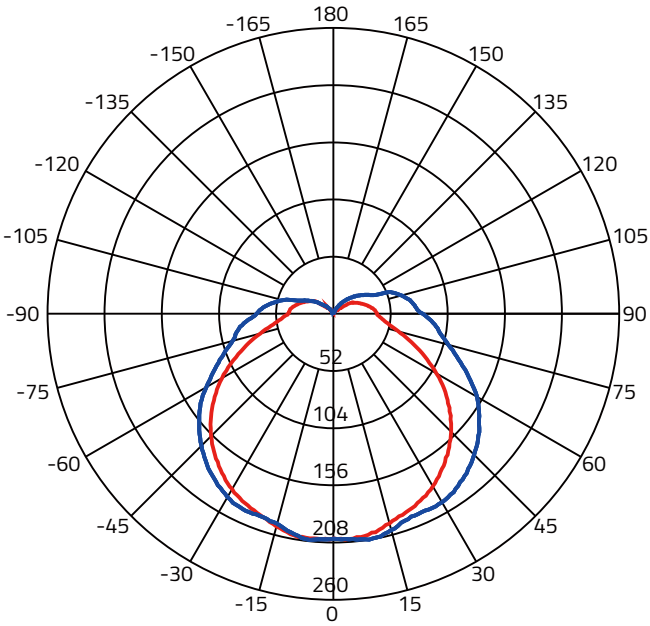


Beam Angle(50%) C0-180,C90-270: 126.0 deg,148.0 deg


C0-180 C90-270

Illuminance at a Distance

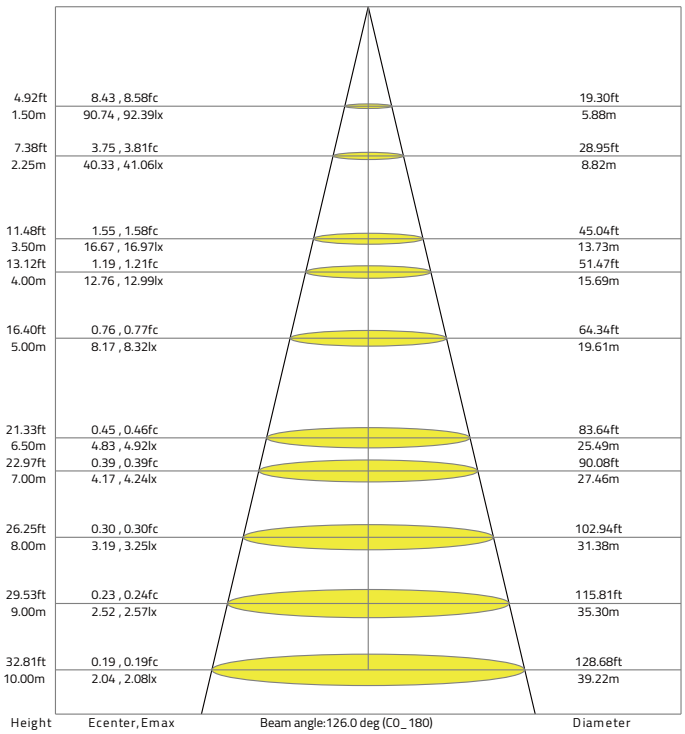





1 Loosen the screws and separate the lamp frame




2 Turn off the power

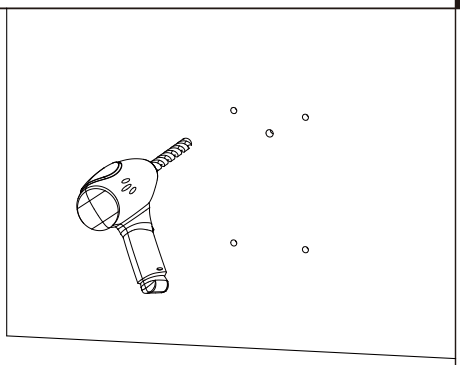


3 Drill 4 holes on your wall

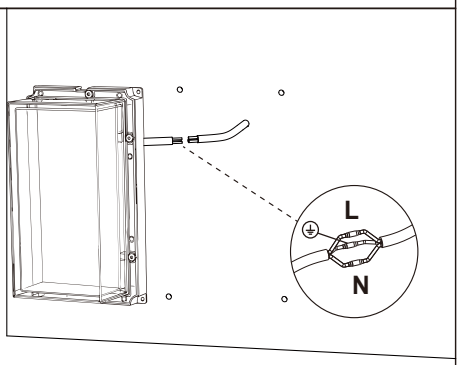


4 Connect the cable and wrap the joints with waterproof tape.

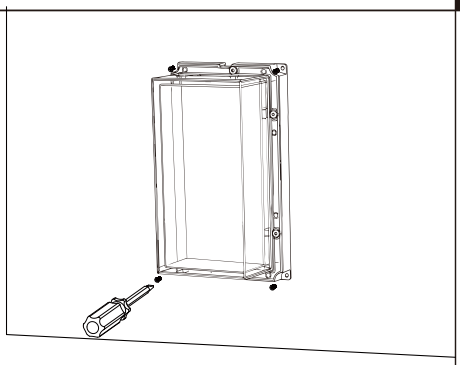


5 Install the screw

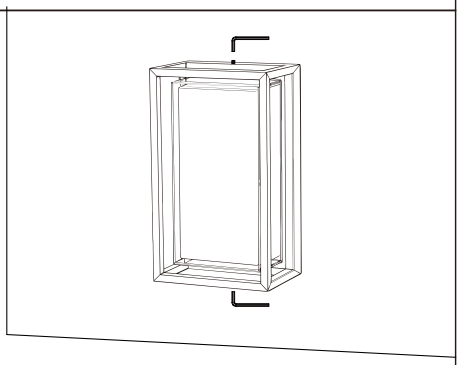

6 Fasten the light frame

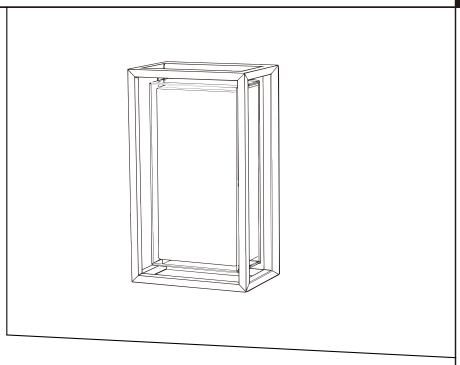

7 Installation completed

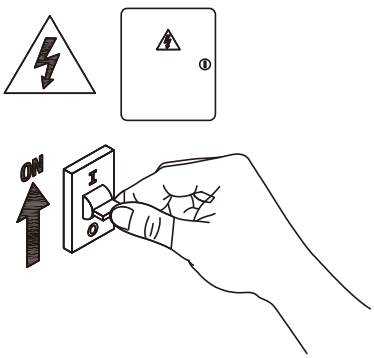

8 Turn on power