



LED SURFACE PANEL LIGHT


NR-PL101S-18-SQ

IP44



Item Code	P (W)	CCT (K)	Beam angle	Output (lm)	lm/w	Dimensions in mm		kg
						A	B	
NR-PL101S-18-SQ	18	3000/6500	120°	1440	80	190	35	0.33

Dimensions in mm

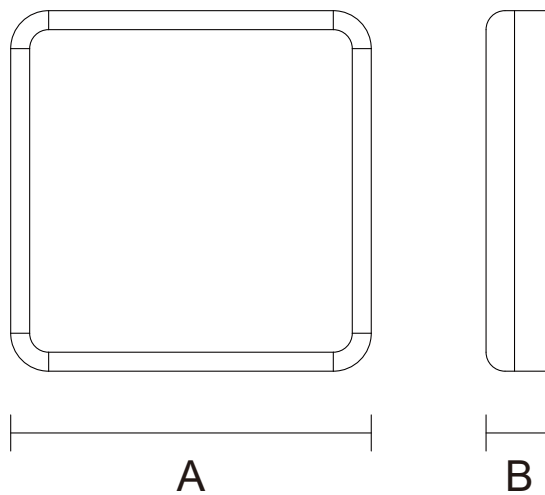




Description:
LED SURFACE PANEL LIGHT


Main material:
Iron+Engineering plastics

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP44

Applications
. Shopping mall
. Office buildings
. Exhibition hall

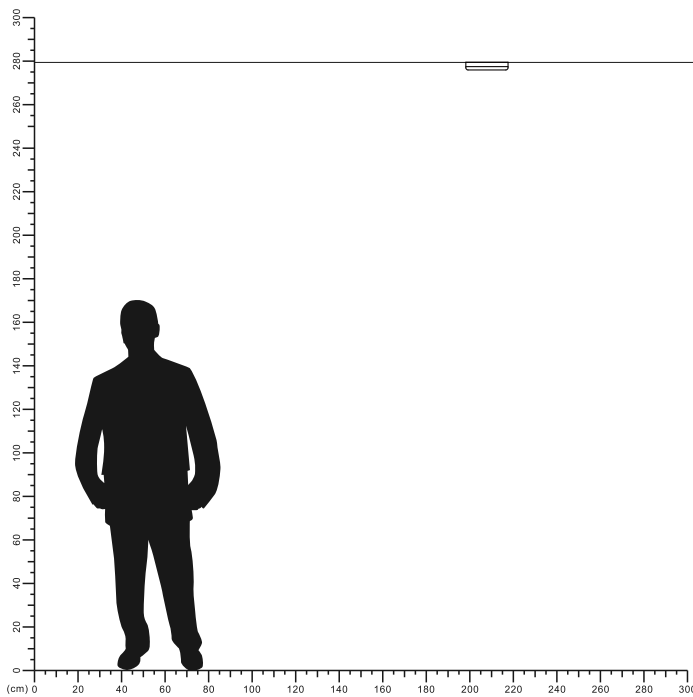


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

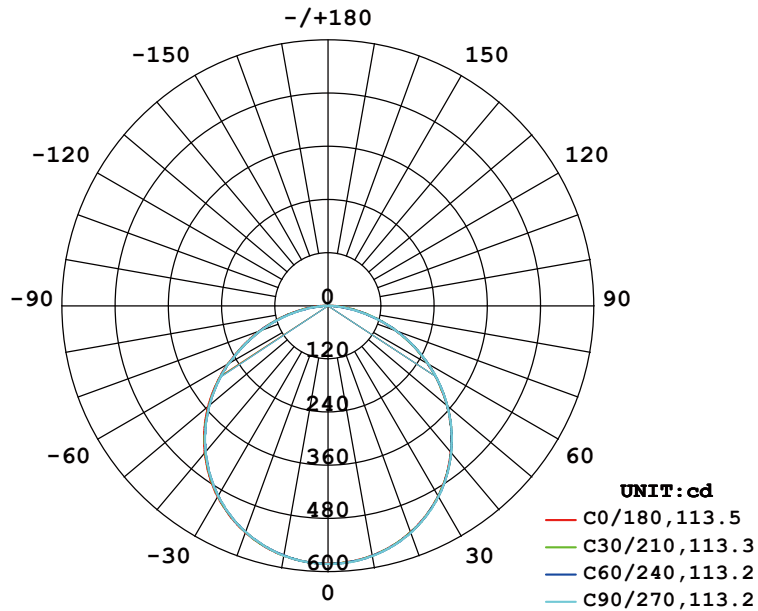

AVERAGE BEAM ANGLE (50%) : 113.3 DEG

Illuminance at a Distance

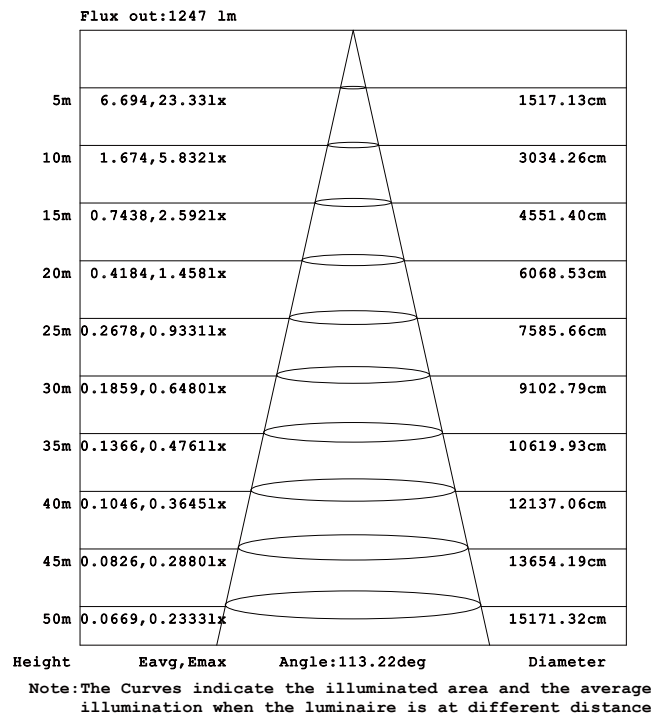

1 Turn off The Power

2 Drill 3 holes on your ceiling

3 Fixing the base

4 Connect the cable

5 Fixing the lamp body into the ceiling

6 Push the lamp to right side to fixed

7 Installation completed

8 Turn on the power

