

LED Ceiling Lamp

NR-PL103 Series


IP20



Indoor	AC 220-240V	50/60 Hz	PF ≥0.5	CCT 6500K 4000K 3000K	Ra ≥80	IP20	80 lm/W	Beam Angle 120°	Chips SMD	
--------	----------------	-------------	------------	--------------------------------	-----------	------	------------	-----------------------	--------------	--


Item Code	P(W)	Color	CCT(K)	Total Lumen	Beam Angle	Dimensions in mm ΦA	B	kg
NR-PL103-30-G	30	Green	6500/4000/3000	2400	120°	300	50	0.9
NR-PL103-40-Y	40	Yellow	6500/4000/3000	3200	120°	600	50	2.15
NR-PL103-60-PN	60	PinK	6500/4000/3000	4800	120°	780	50	3.36

Dimensions in mm

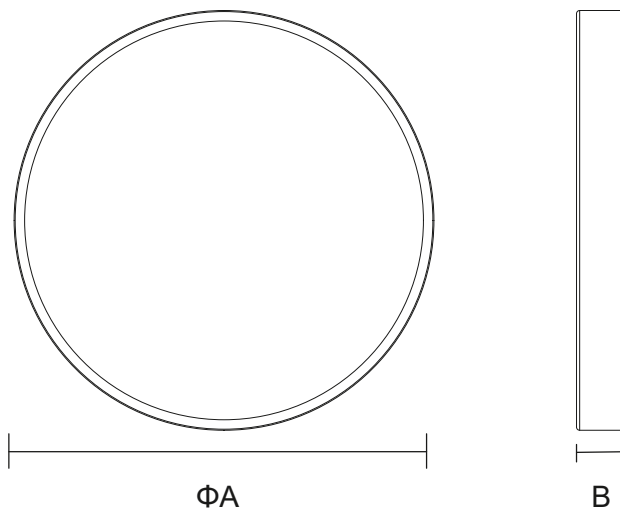



High quality iron metal shell, paint process, macaron color

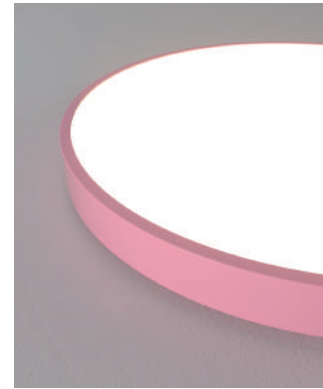

PMMA high light transmittance and light To prevent glare, reduce light pollution



Description:

LED Ceiling Lamp

Main material:


Optimizing iron materials, high temperature of the lacquer that bake cavity pressure process more durable, anticorrosion, High pervious to light acrylic, astigmatism uniform light natural soft to prevent glare, reduce light pollution .Simple appearance, fashion modern geometry design is much less, simple and elegant

Specification:


Energy saving, upto 85% energy saving comparing to standard halogen and incandescent lamps Long life, upto 50,000 hours High quality light, high color rending, less heat, no UV or IR radiation

Applications

- Shoping mall
- Office buildings
- Exhibition hall

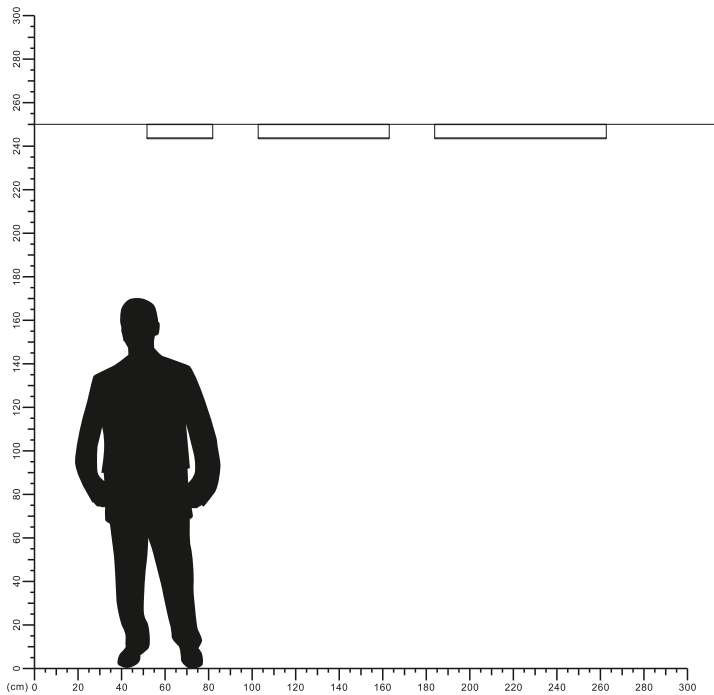


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

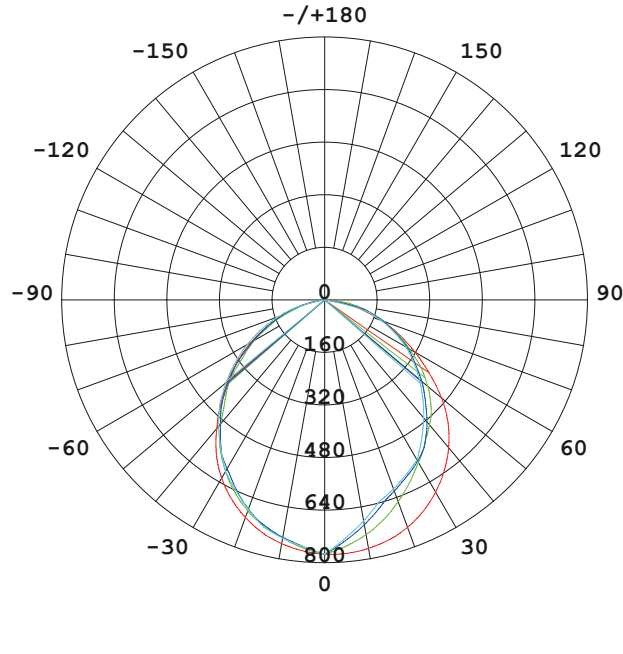


AVERAGE BEAM ANGLE (50%) : 101.1 DEG

Illuminance at a Distance

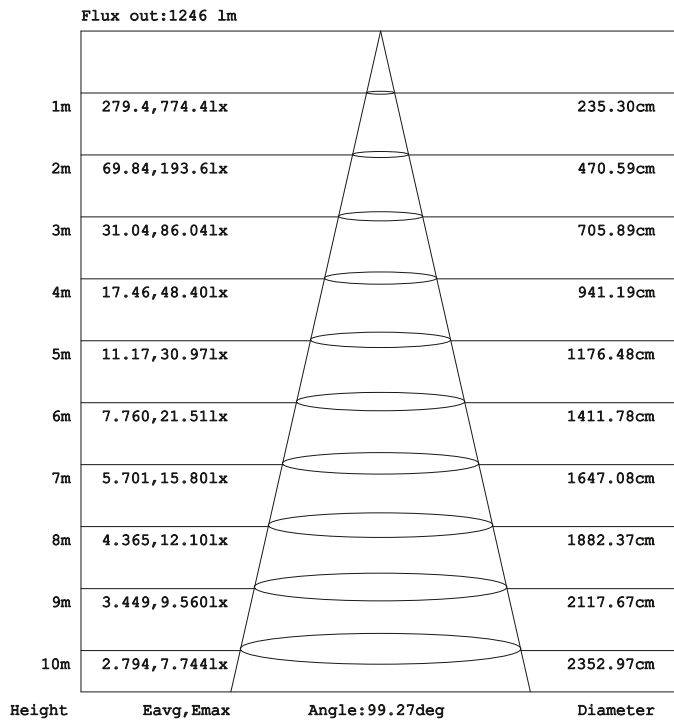


Model: NR-PL103-30-G

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

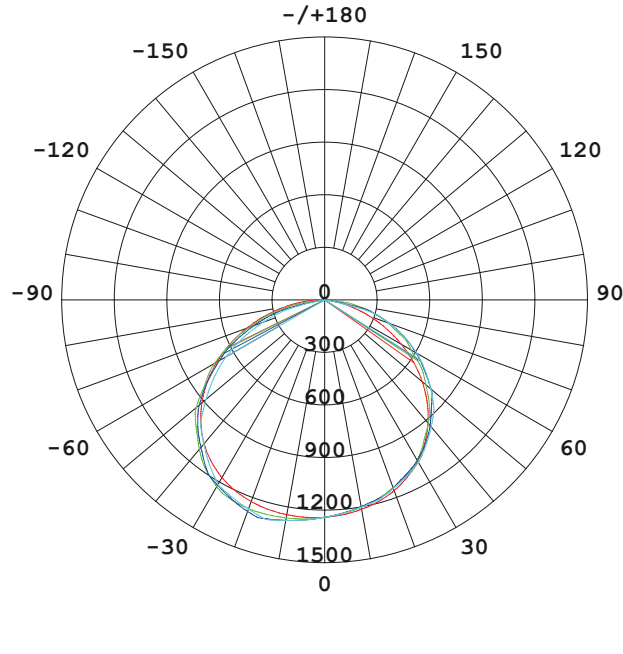


AVERAGE BEAM ANGLE (50%) : 119.0 DEG

Illuminance at a Distance

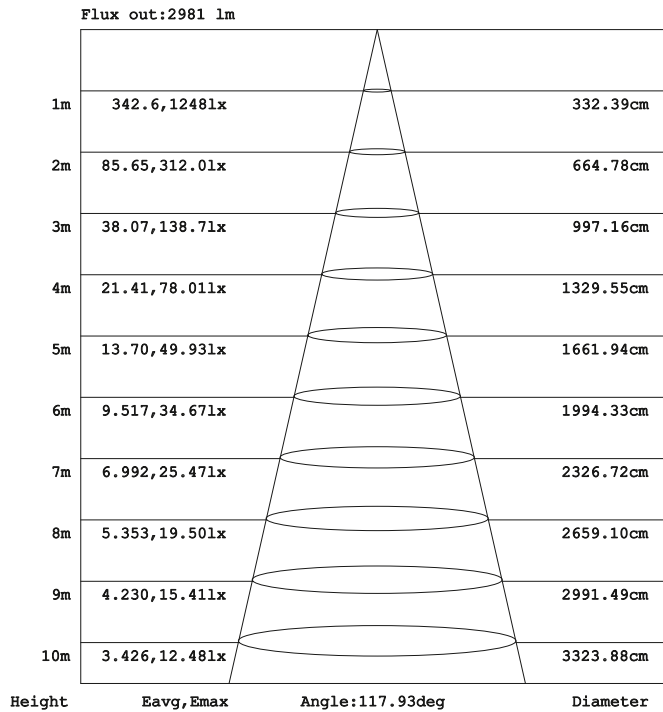


Model: NR-PL103-40-Y

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

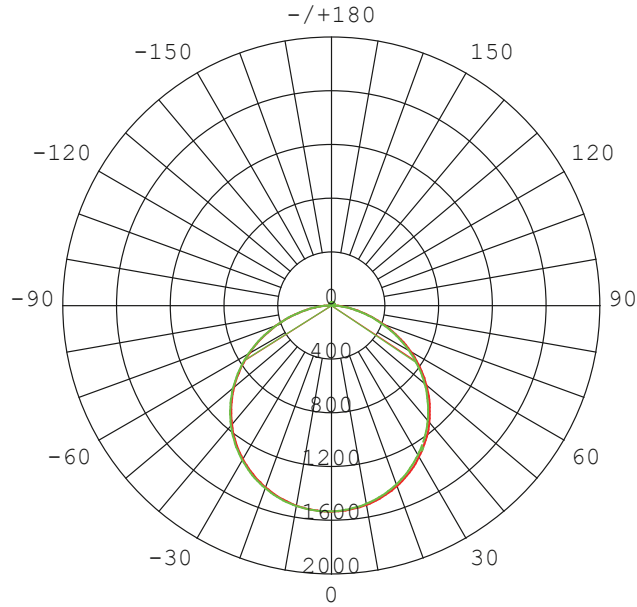

AVERAGE BEAM ANGLE (50%) : 114.0 DEG

Illuminance at a Distance

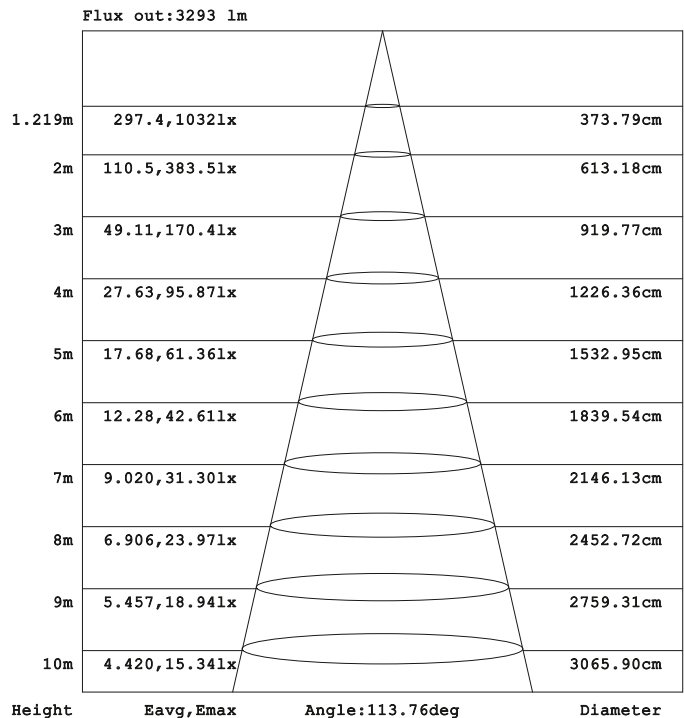

Model: NR-PL103-60-PN

