





## LED SURFACE PANEL LIGHT

NR-PL103S Series  
IP20


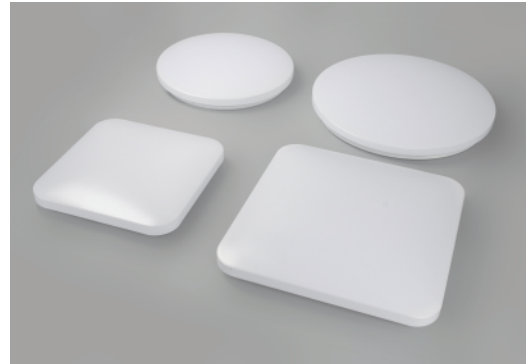


Item Code	P (W)	CCT (K)	Beam angle	Output (lm)	lm/w	Dimensions in mm		kg
						A	B	
NR-PL103S-24	24	3000/4000/6500	120°	1920	80	Φ380	60	0.63
NR-PL103S-36	36	3000/4000/6500	120°	2880	80	Φ480	60	0.73
NR-PL103S-SQ-24	24	3000/4000/6500	120°	1920	80	□330	60	0.48
NR-PL103S-SQ-36	36	3000/4000/6500	120°	2880	80	□430	60	0.81

### Dimensions in mm

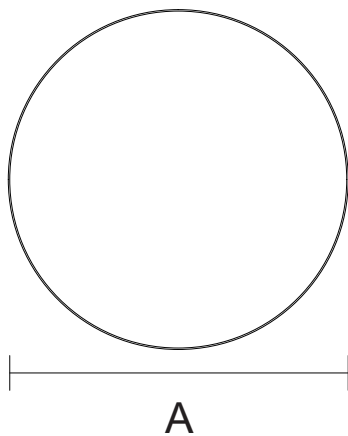


NR-PL103S

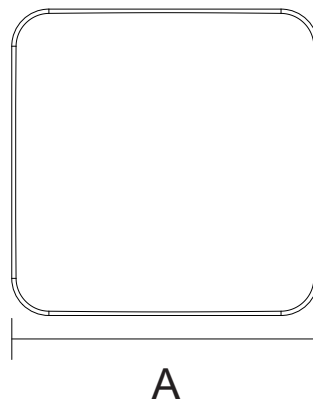

NR-PL103S-SQ



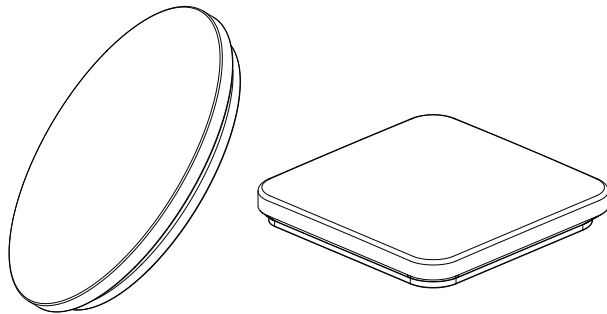


**Description:**  
LED SURFACE PANEL LIGHT


**Main material:**  
Iron+Engineering plastics

**Specification**  
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps  
High quality light, high color rendering, less heat, no UV or IR radiation  
LED driver is included  
IP20

**Applications**  
. Shopping mall  
. Office buildings  
. Exhibition hall

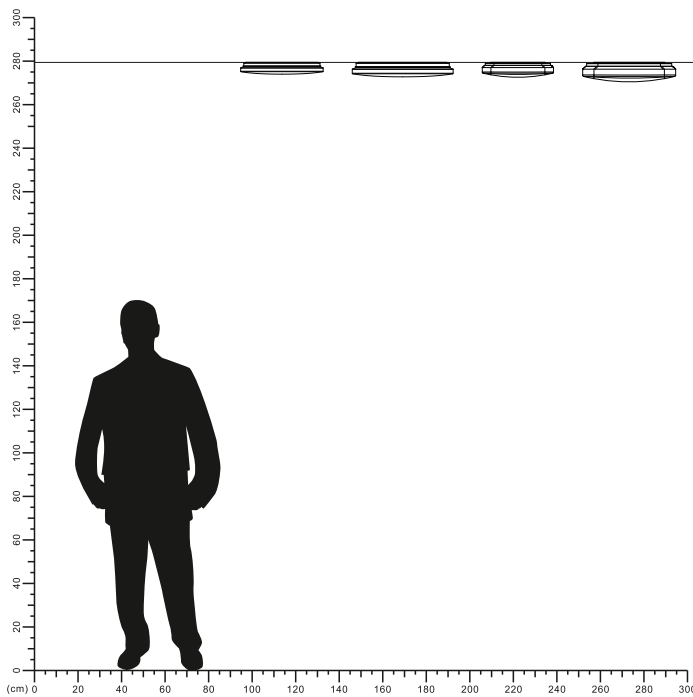


# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

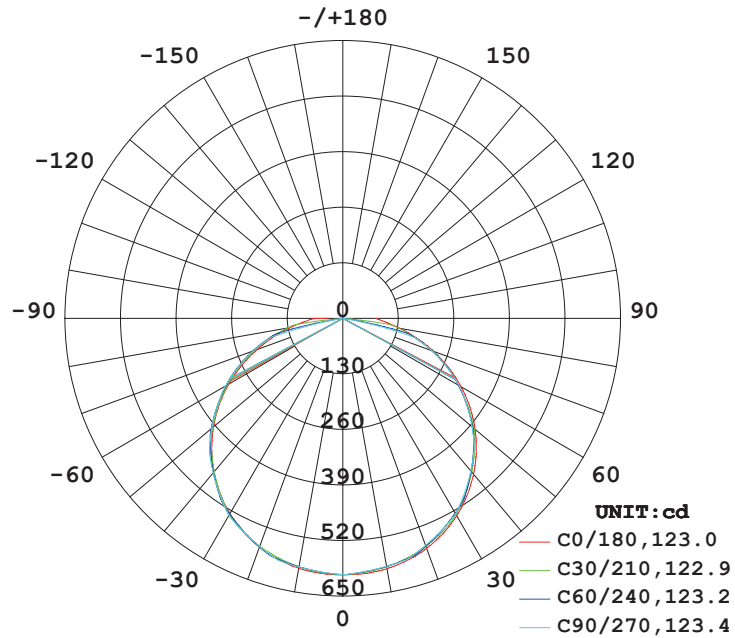


**AVERAGE BEAM ANGLE (50%) : 123.1 DEG**

## Illuminance at a Distance

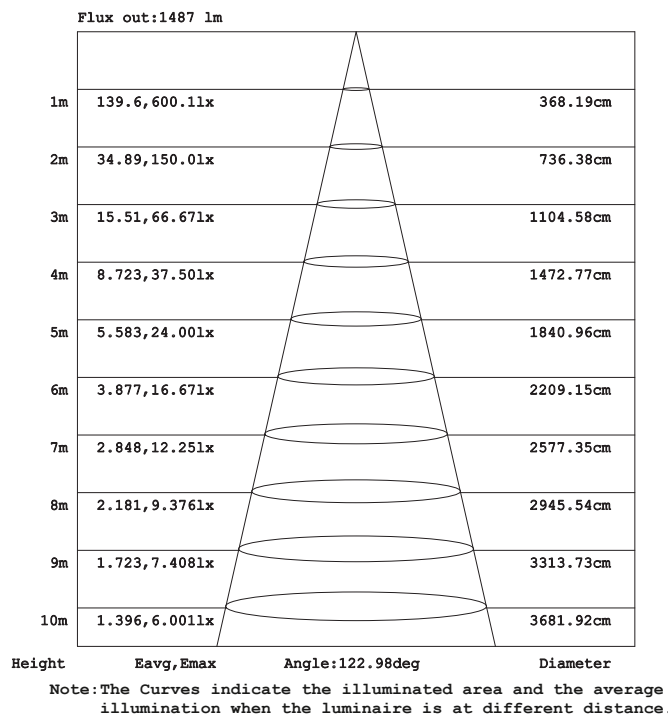


# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

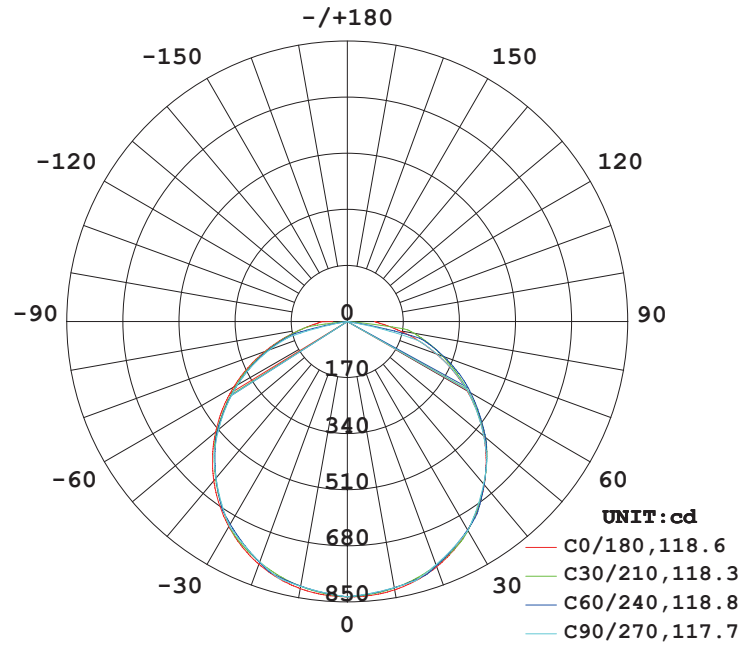


**AVERAGE BEAM ANGLE (50%) : 118.3 DEG**

## Illuminance at a Distance

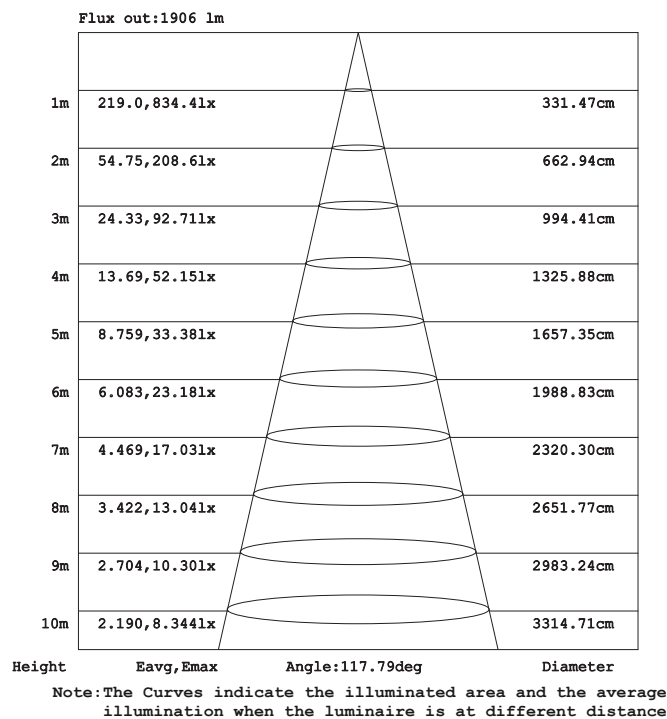


# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

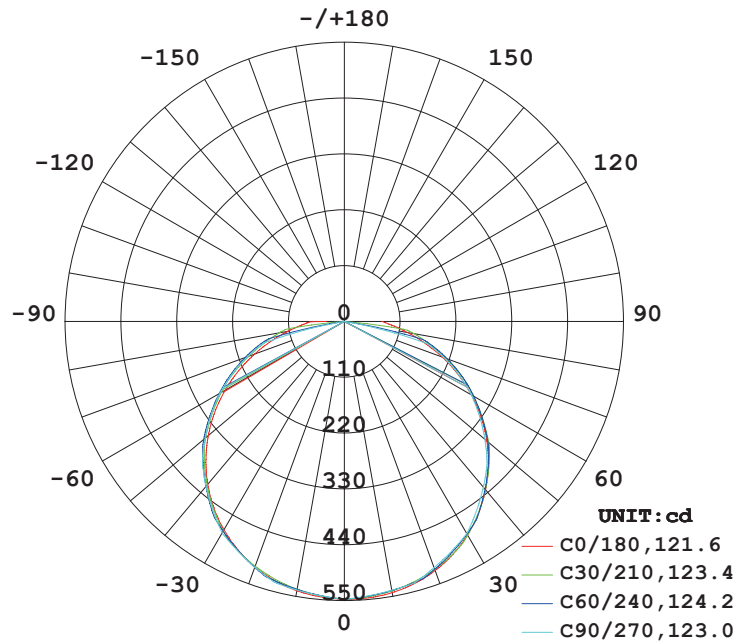


**AVERAGE BEAM ANGLE (50%) : 123.0 DEG**

## Illuminance at a Distance

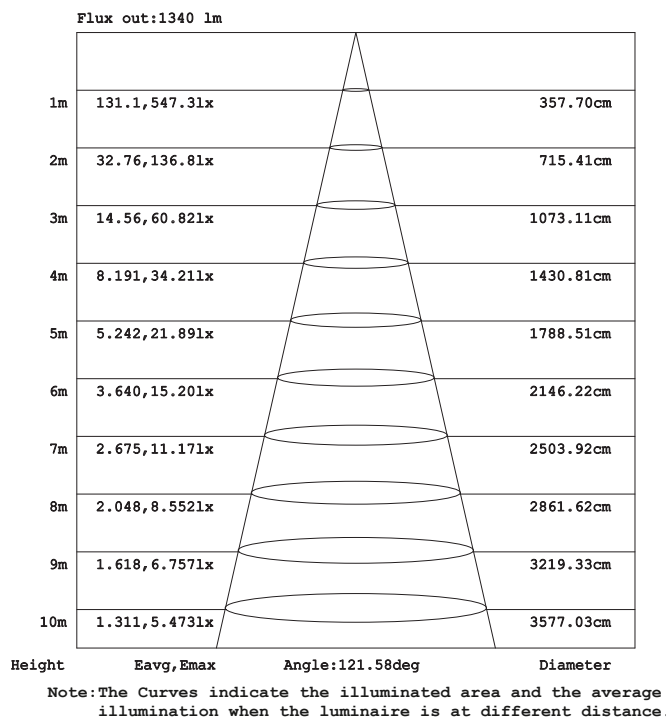


# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


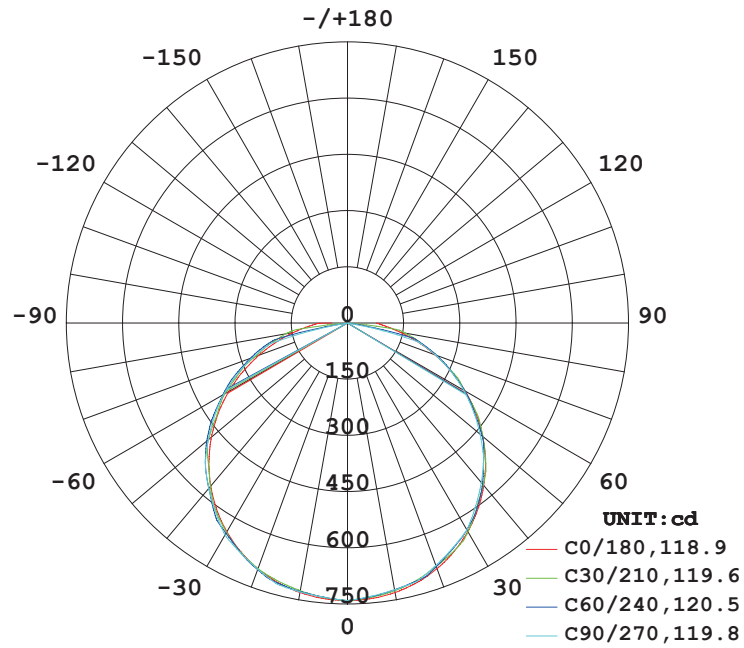


**AVERAGE BEAM ANGLE (50%) : 119.7 DEG**

## Illuminance at a Distance

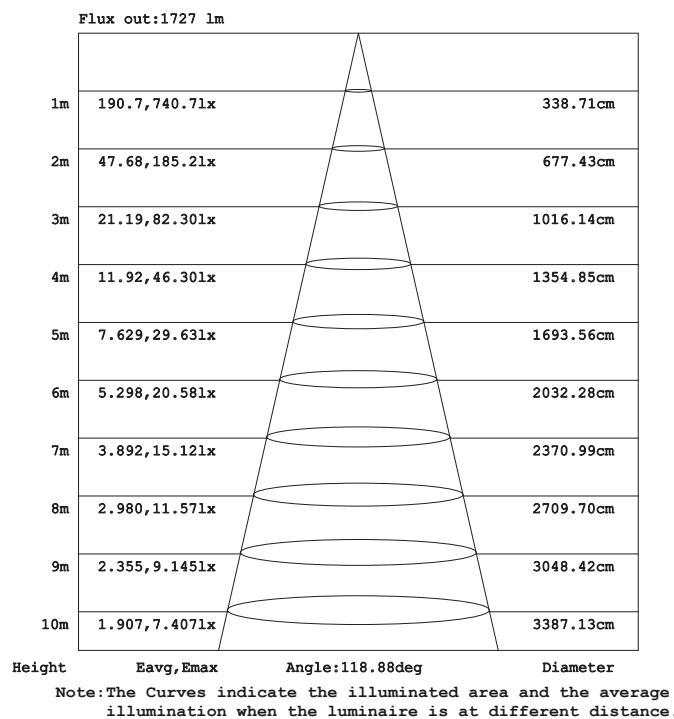


**Model: NR-PL103S-SQ-36**

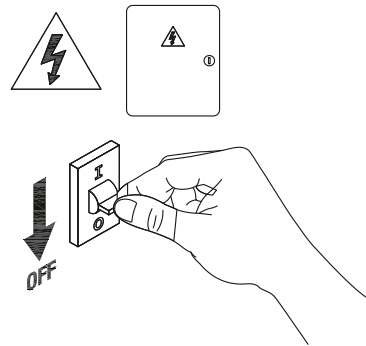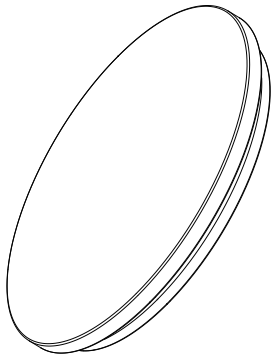


**1**

Turn off The Power




**2**

Drill 4 holes on your ceiling




**3**

Fixing the base

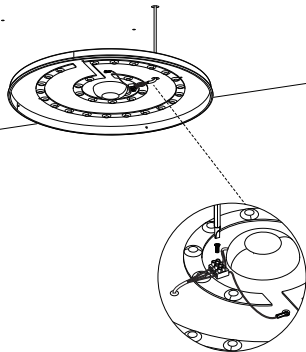

**4**

connect the cable




**5**

Put the PC cover into the base



**6**

Installation completed

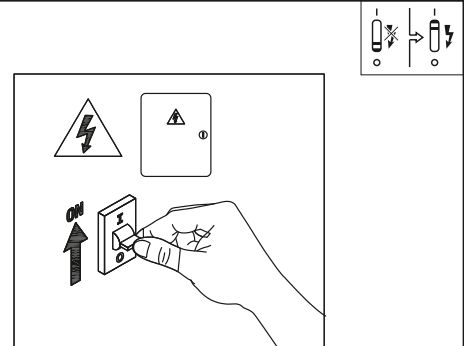

**7**

Turn on the power

