


LED Magnetic Track System

NR-M2LD0751-15 Series NR-M3LD0801-15 Series
NR-M2LP0651-15 Series NR-M3LP701-15 Series
IP20




Model No	P(W)	CCT(K)	Using Track	Beam Angle	Output (lm)	Dimensions in mm				kg
A	B	C	D							
NR-M2LD0751-15-27K-BK-24D	15	2700	NR-S20/F20	24°	1155	320	23	43	292	0.29
NR-M2LD0751-15-30K-BK-24D	15	3000	NR-S20/F20	24°	1155	320	23	43	292	0.29
NR-M2LD0751-15-40K-BK-24D	15	4000	NR-S20/F20	24°	1155	320	23	43	292	0.29
NR-M3LD0801-15-27K-BK-24D	15	2700	NR-S35/F35	24°	1155	320	34	70	292	0.48
NR-M3LD0801-15-30K-BK-24D	15	3000	NR-S35/F35	24°	1155	320	34	70	292	0.48
NR-M3LD0801-15-40K-BK-24D	15	4000	NR-S35/F35	24°	1155	320	34	70	292	0.48
NR-M2LP0651-15-27K-BK-100D	15	2700	NR-S20/F20	100°	1110	310	23	43	292	0.26
NR-M2LP0651-15-30K-BK-100D	15	3000	NR-S20/F20	100°	1110	310	23	43	292	0.26
NR-M2LP0651-15-40K-BK-100D	15	4000	NR-S20/F20	100°	1110	310	23	43	292	0.26
NR-M3LP701-15-27K-BK-100D	15	2700	NR-S35/F35	100°	1110	320	34	70	292	0.55
NR-M3LP701-15-30K-BK-100D	15	3000	NR-S35/F35	100°	1110	320	34	70	292	0.55
NR-M3LP701-15-40K-BK-100D	15	4000	NR-S35/F35	100°	1110	320	34	70	292	0.55


Dimensions in mm

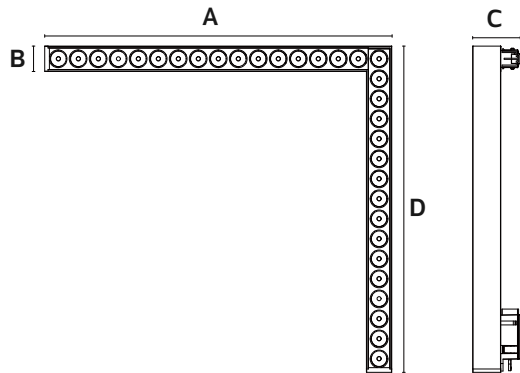


NR-M2LD0751-15 Series

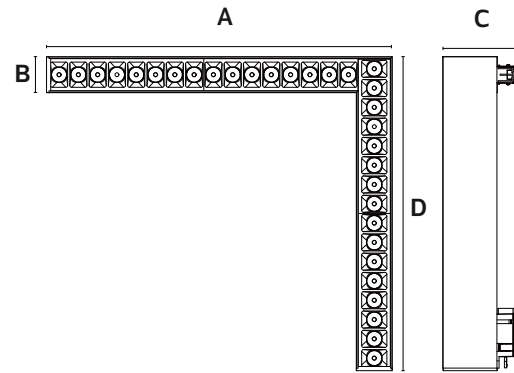


NR-M3LD0801-15 Series

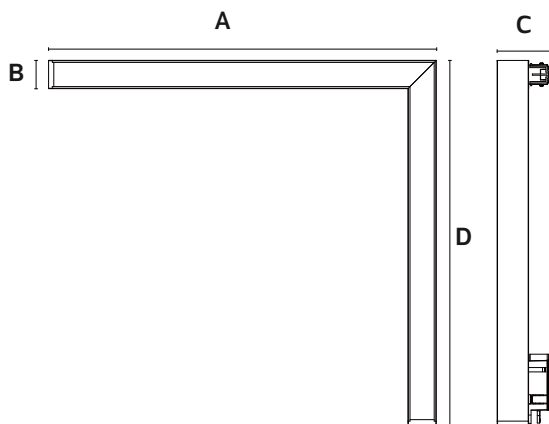

NR-M2LP0651-15 Series

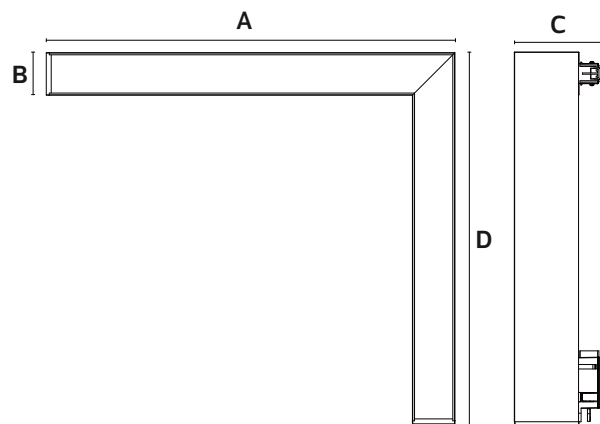

NR-M3LP701-15 Series


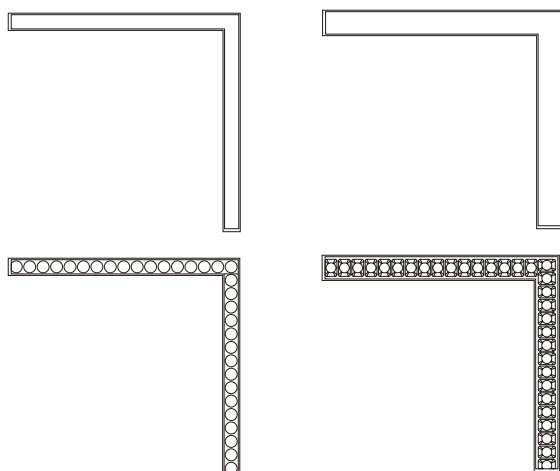



Description:
LED Magnetic Track System

Main material:
Aluminum+PC


Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

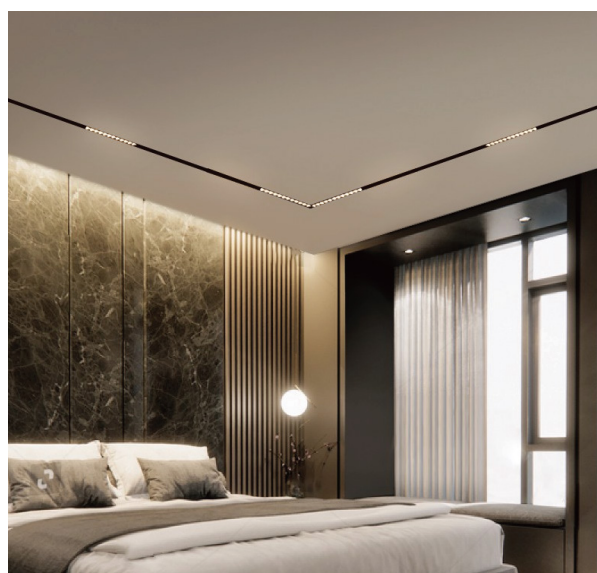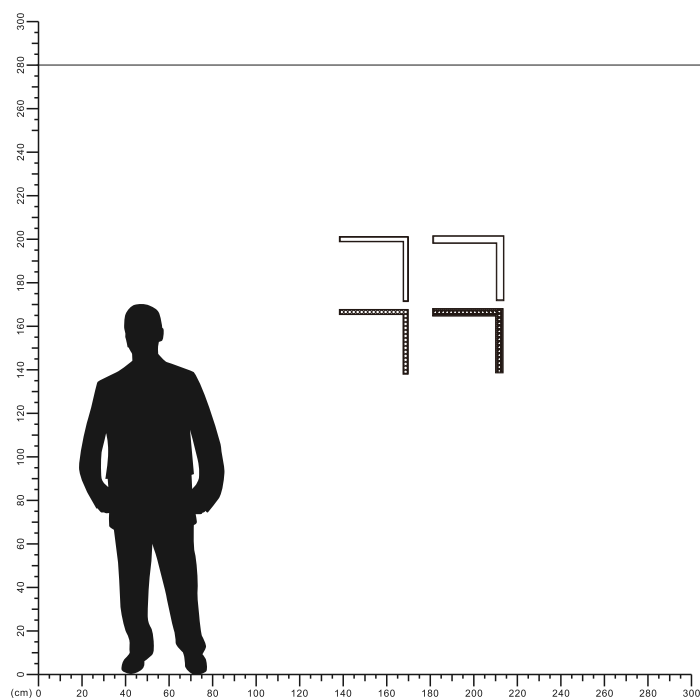

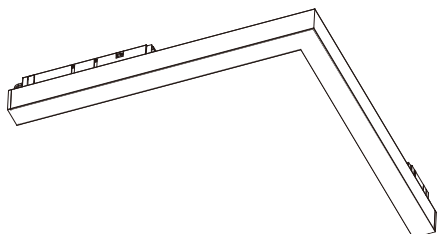


1

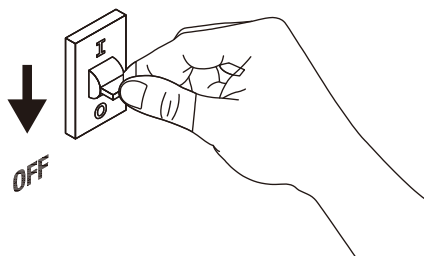


2

Turn off the power

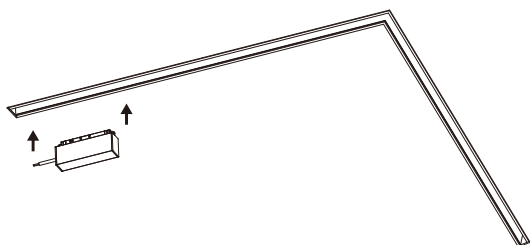


3

Install DC48V power supply

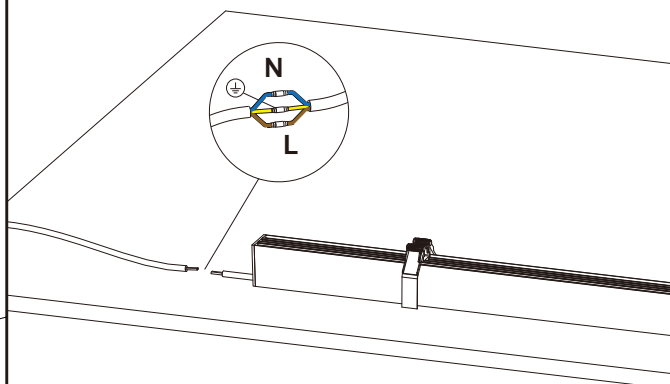


4

Connect the cable

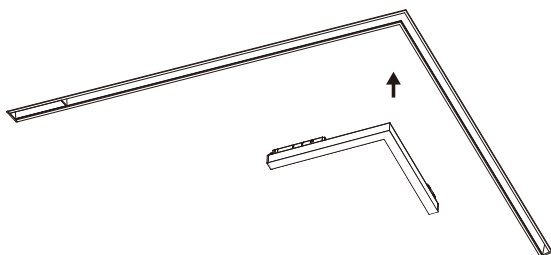

5

Install lamp

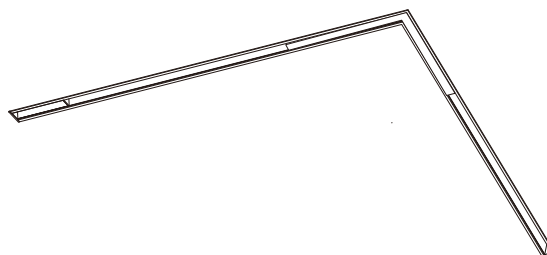

6

Installation is complete

