



LED Magnetic Track System

NR-MUL1601-6-30K-BK-150D


NR-MUL1651-6-30K-BK-180D

IP20




Model No	P(W)	CCT(K)	Output (lm)	Using Track	Beam Angle	kg
NR-MUL1601-6-30K-BK-150D	6	3000	216	NR-S20/F20 NR-S35/F35	150°	0.17
NR-MUL1651-6-30K-BK-180D	6	3000	270	NR-S20/F20 NR-S35/F35	180°	0.23


Dimensions in mm

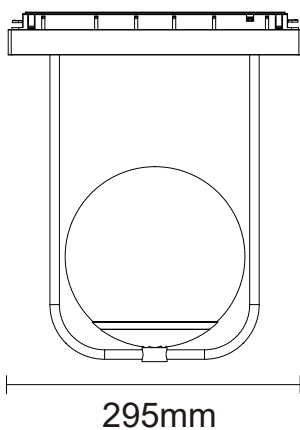

NR-MUL1601-6-30K-BK-150D

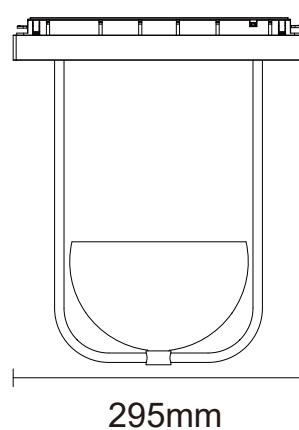

NR-MUL1651-6-30K-BK-180D


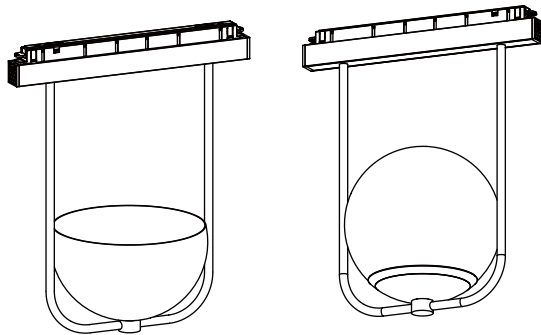



Description:
LED Magnetic Track System

Main material:
Iron + Aluminum + Glass


Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

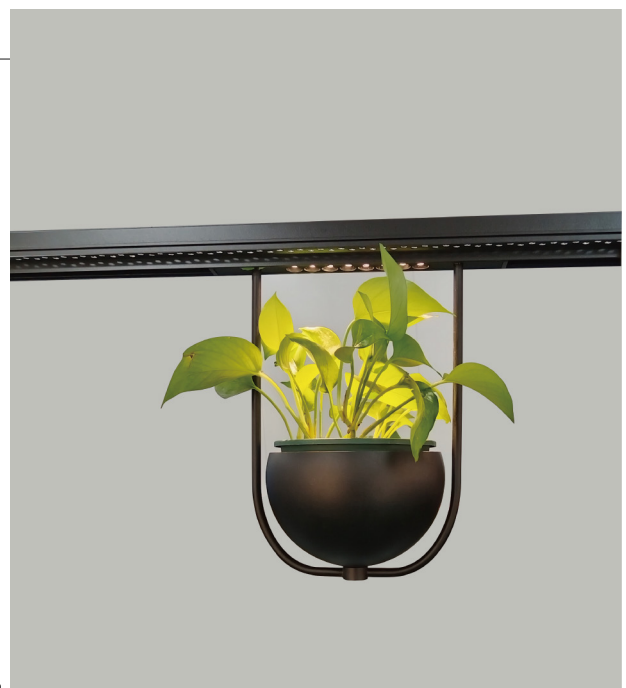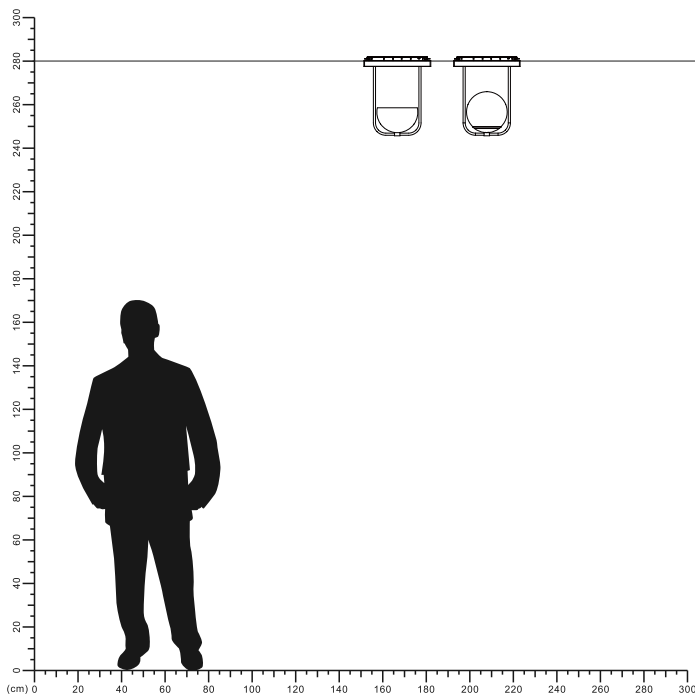




1

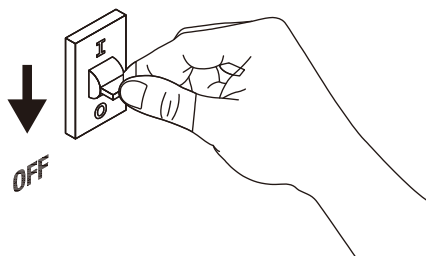


2

Turn off the power

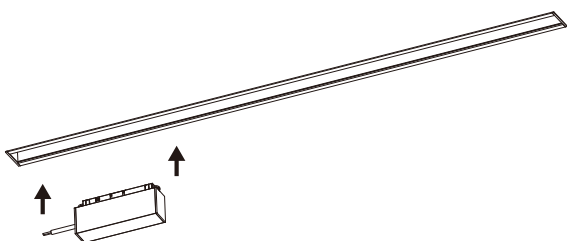


3

Install DC48V power supply

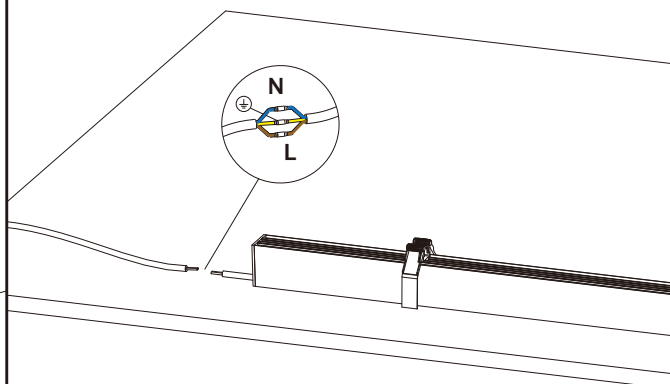


4

Connect the cable

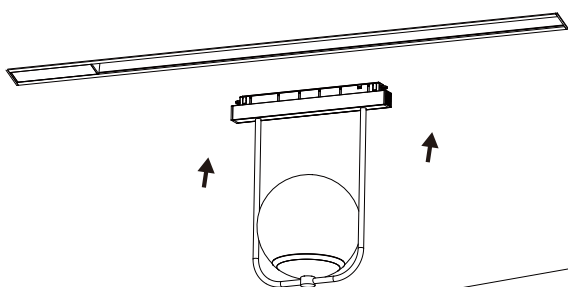

5

Install lamp

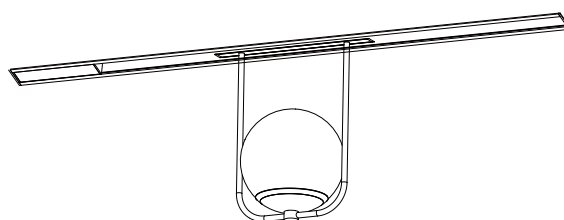

6

Installation is complete

