



LED Magnetic Track System

NR-S20-R Series
IP20




Item Code	P(W)	Using Track	Total Lumen	Beam Angle	Dimensions in mm			kg
					A	B	C	
NR-S20-R-DL-2W	2	NR-S20-R(Φ800)	130	20°	35	20	45	0.02
NR-S20-R-DL-6W	6	NR-S20-R(Φ800)	426	24°	22.5°	22	45	0.1
NR-S20-R-DL-10W	10	NR-S20-R(Φ800)	710	24°	45°	22	45	0.19
NR-S20-R-PC-6W	6	NR-S20-R(Φ800)	426	90°	22.5°	22	45	0.1
NR-S20-R-PC-10W	10	NR-S20-R(Φ800)	710	90°	45°	22	45	0.19


Dimensions in mm






NR-S20-R-DL-2W



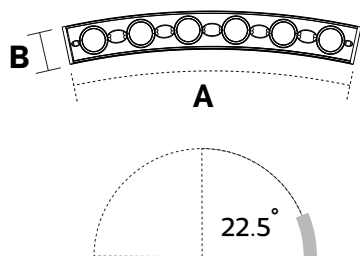


NR-S20-R-DL-6W






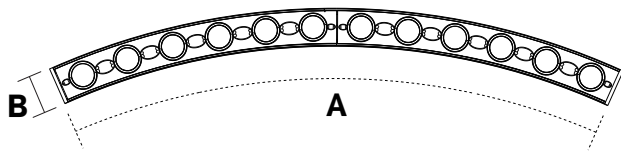


NR-S20-R-DL-10W




NR-S20-R-PC-6W

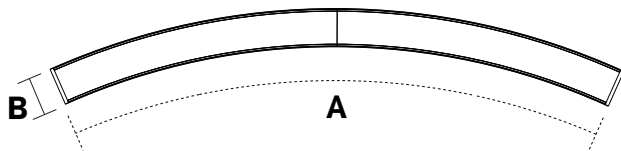

NR-S20-R-PC-10W

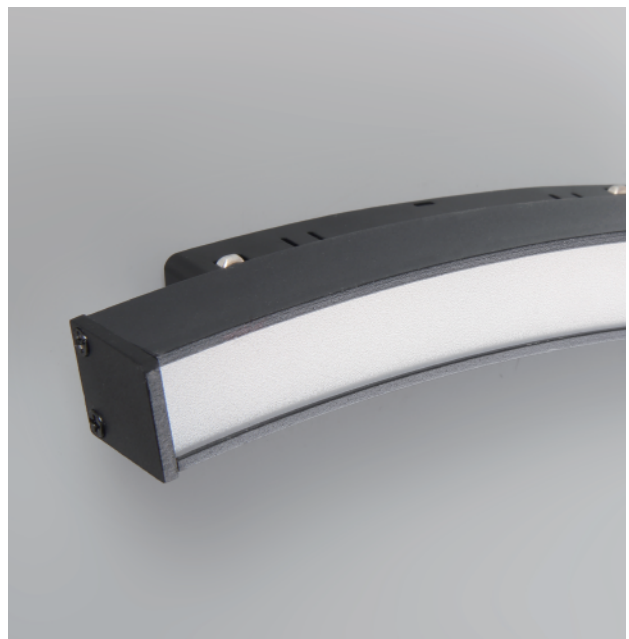

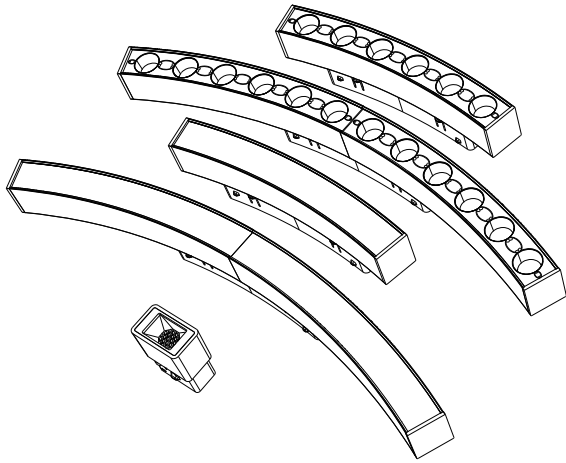


Description:
LED Magnetic Track System




Main material:
Aluminum shell, Silica gel


Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

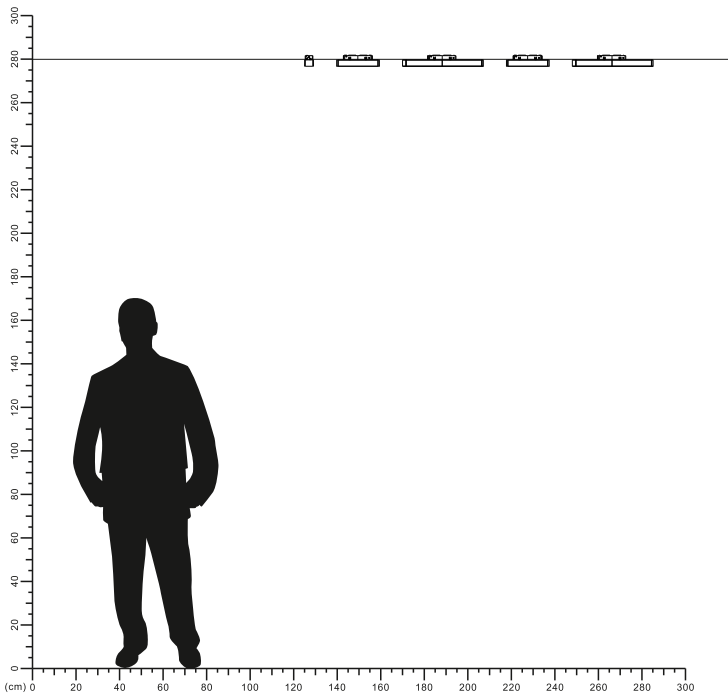Applications
.Office
.Meeting room
.Sitting room




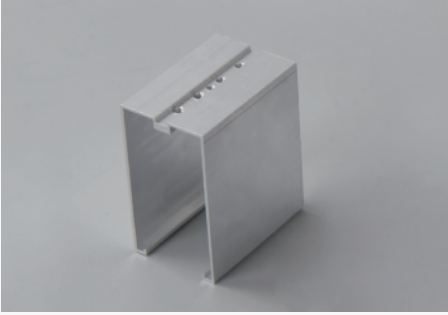



Magnetic Track

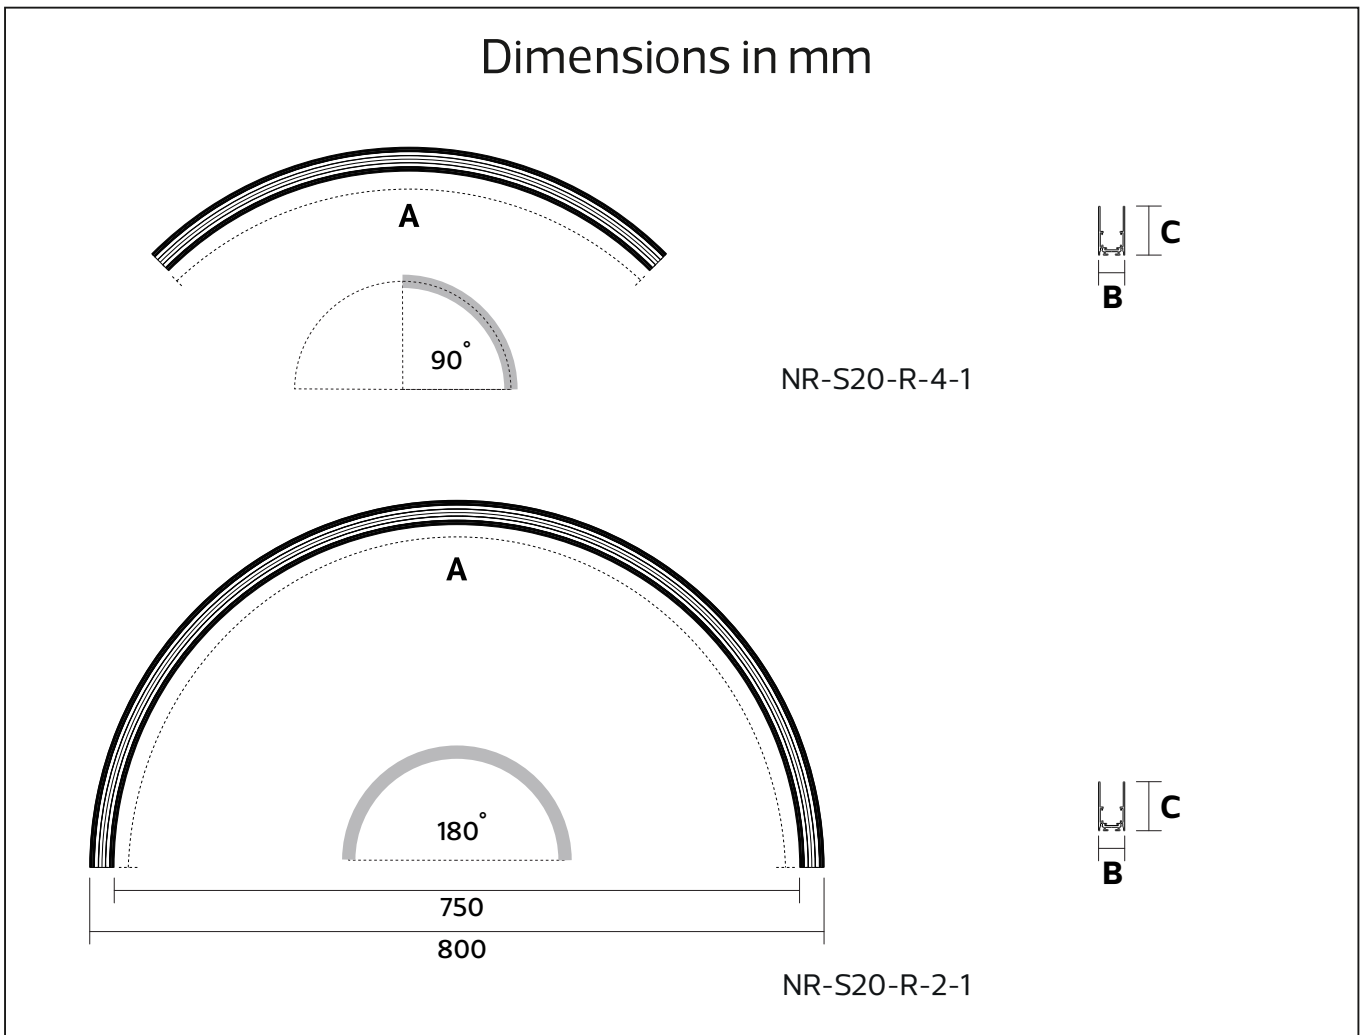
Picture	Item Code	Dimensions in mm			
		A	B	C	
	NR-S20-R-4-1	90°	26	50	0.5
	NR-S20-R-2-1	180°	26	50	1



Accessories


Picture	Item Code	Size	
	NR-S20-R-CONNECT	133*17*17	0.02
	NR-S20-R-POWER	55*19*18	0.02
	NR-S20-R-ACS	45*30*53	0.01
	NR-S20-R-Wire-1m		

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

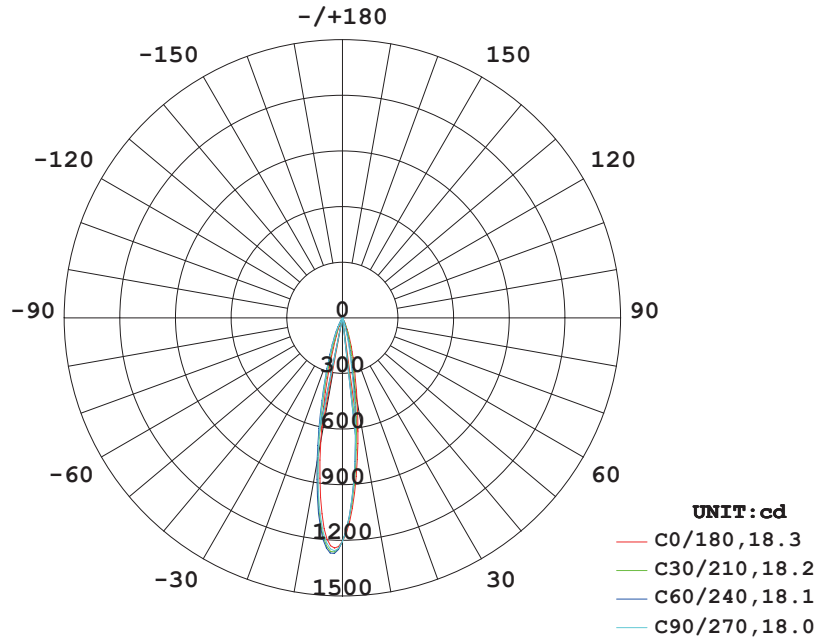


AVERAGE BEAM ANGLE (50%) : 18.2 DEG

Illuminance at a Distance

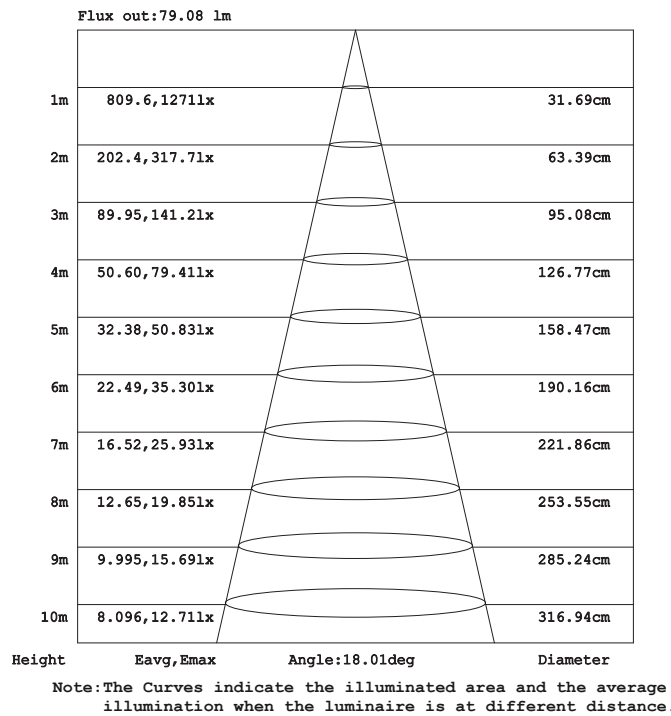


Model: NR-S20-R-DL-2W

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

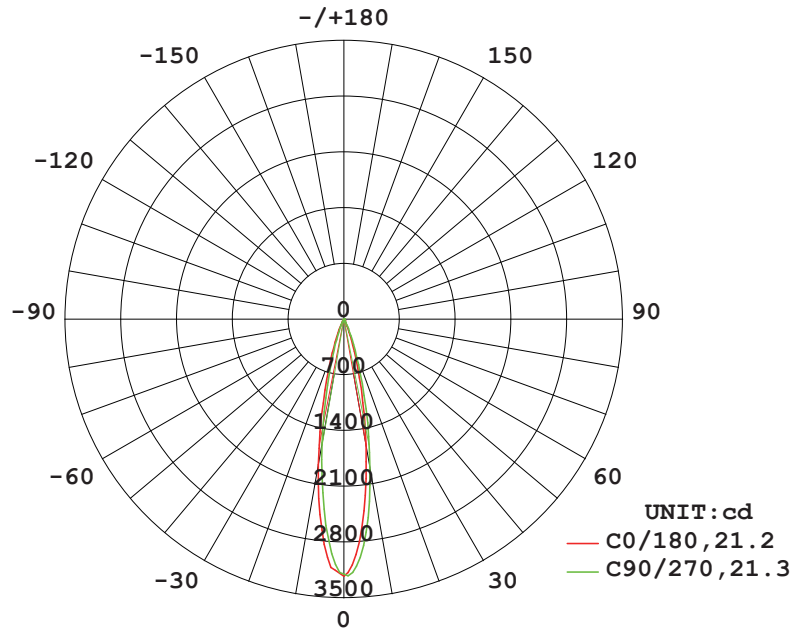


AVERAGE BEAM ANGLE (50%) : 21.2 DEG

Illuminance at a Distance

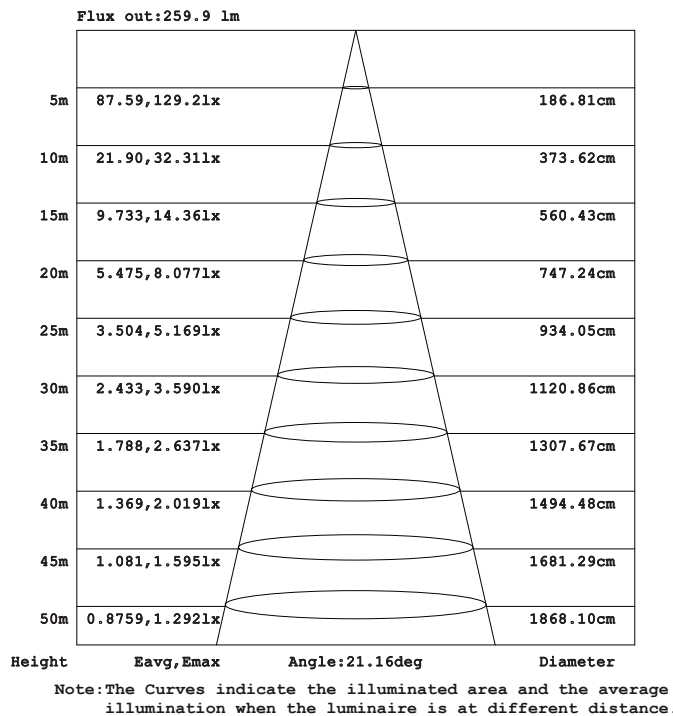


Model: NR-S20-R-DL-6W

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

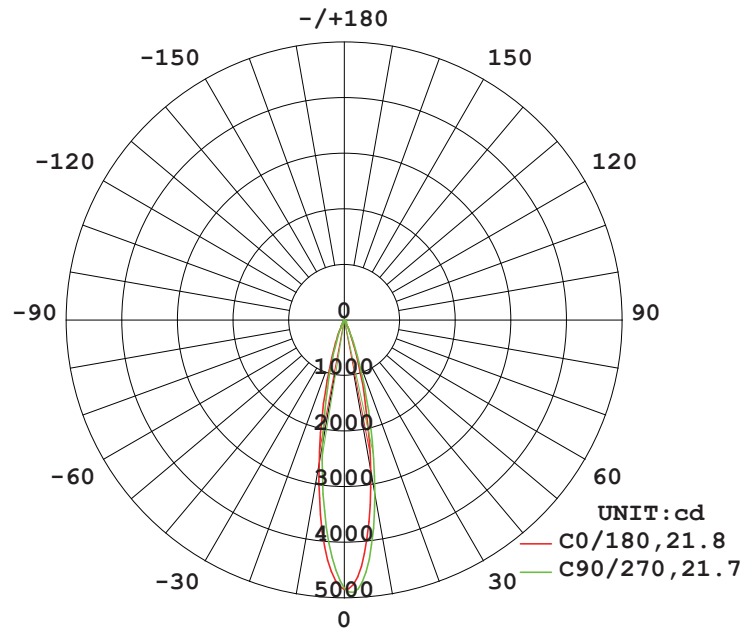


AVERAGE BEAM ANGLE (50%) : 21.7 DEG

Illuminance at a Distance

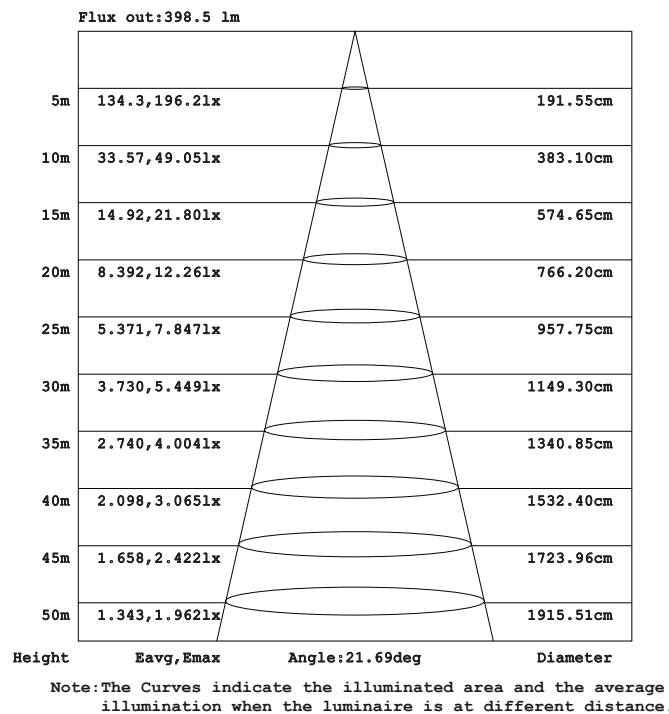


Model: NR-S20-R-DL-10W

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

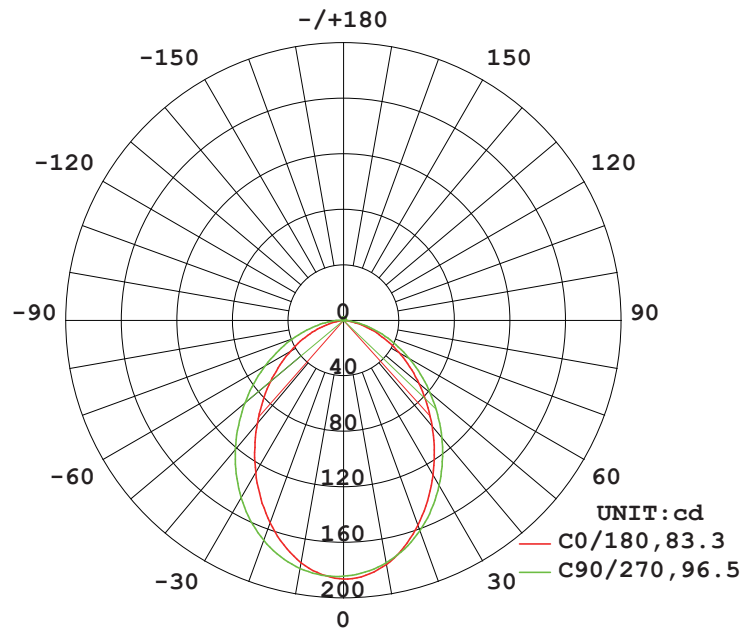


AVERAGE BEAM ANGLE (50%) : 89.9 DEG

Illuminance at a Distance

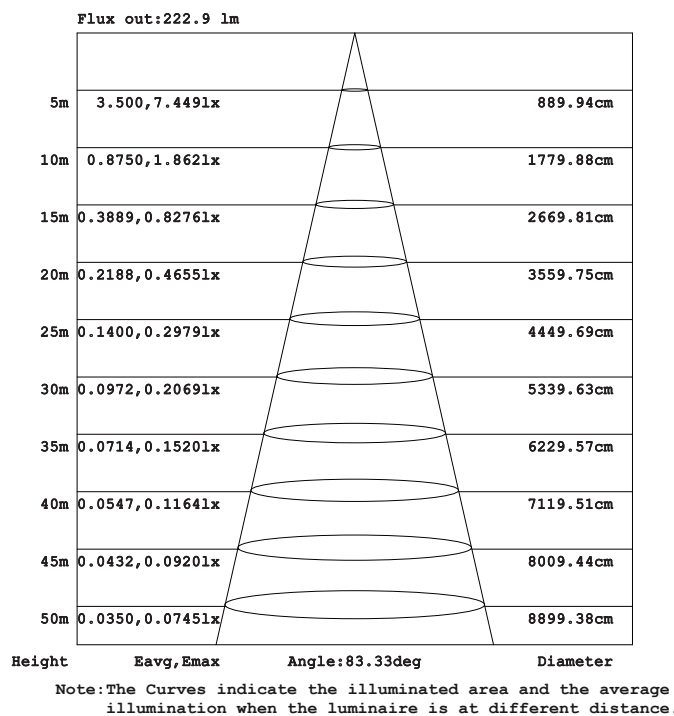


Model: NR-S20-R-PC-6W

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

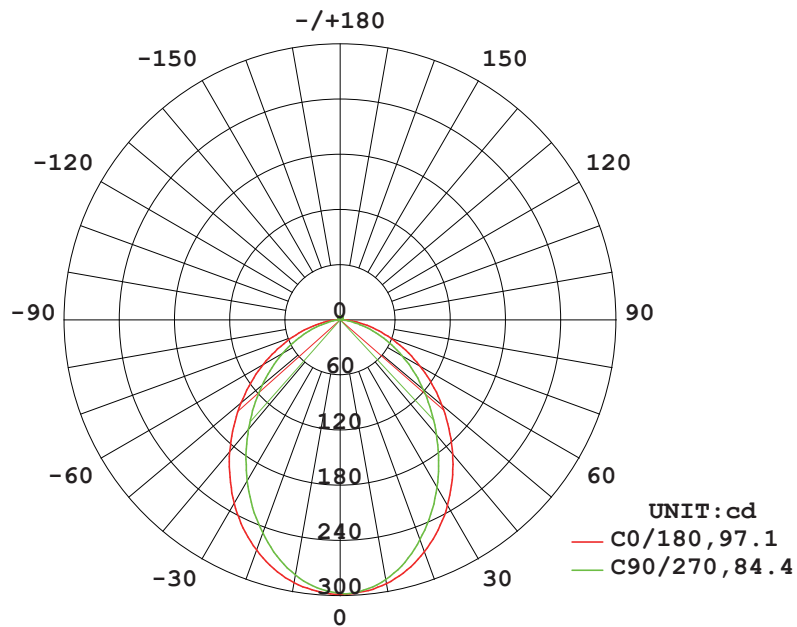

AVERAGE BEAM ANGLE (50%) : 90.8 DEG

Illuminance at a Distance

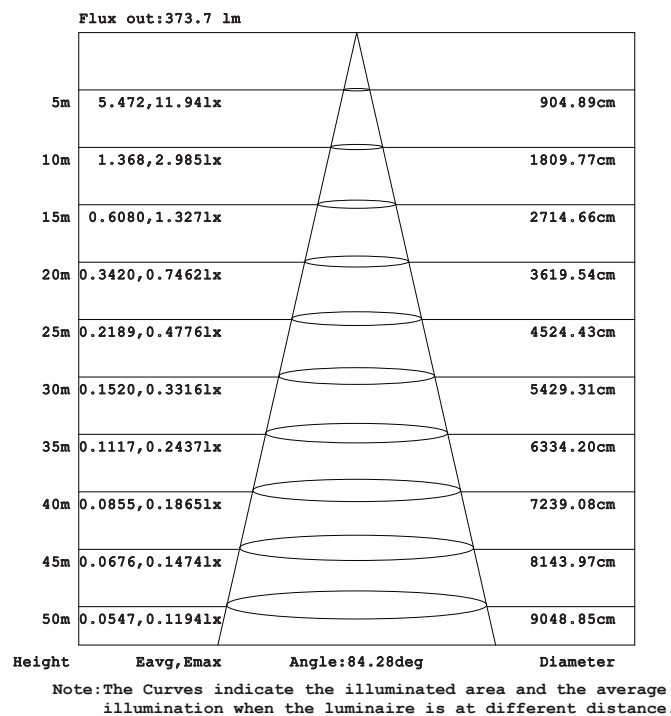

Model:NR-S20-R-PC-10W

