




## LED Downlight

NR-SLM102 MR11 Series  
IP20



Item Code	P (W)	CCT (K)	Beam angle	Output (lm)	lm/w	Dimensions in mm			kg
						A	B	C	
NR-SLM102-5	5	3000/4000	36°	355	71	Φ35	Φ38	73	0.18
NR-SLM102-10 3000K	10	3000	36°	850	85	Φ35	Φ47	75	0.23
NR-SLM102-10 4000K	10	4000	36°	750	75	Φ35	Φ47	75	0.23



### Dimensions in mm

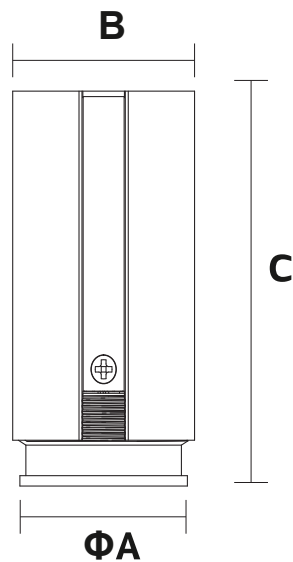

NR-SLM102-5



NR-SLM102-10

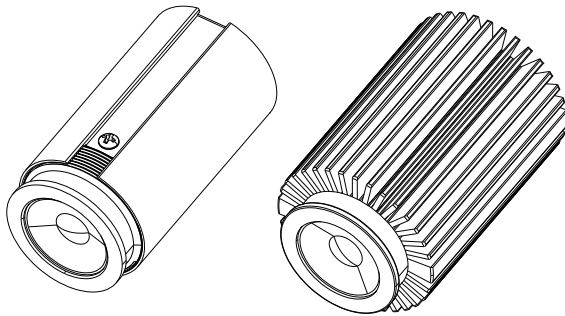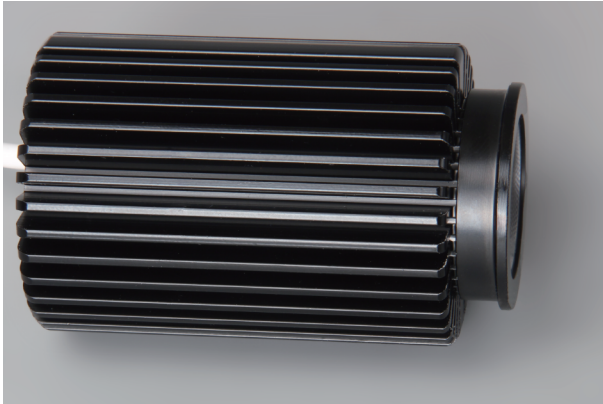

**Description:**

LED SLM102 Downlight

**Main material:**



Die-cast aluminum+Engineering plastics

**Specification**


Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps High quality light, high color rendering, less heat, no UV or IR radiation LED driver is included IP20

**Applications**

- . Shopping mall
- . Office buildings
- . Exhibition hall

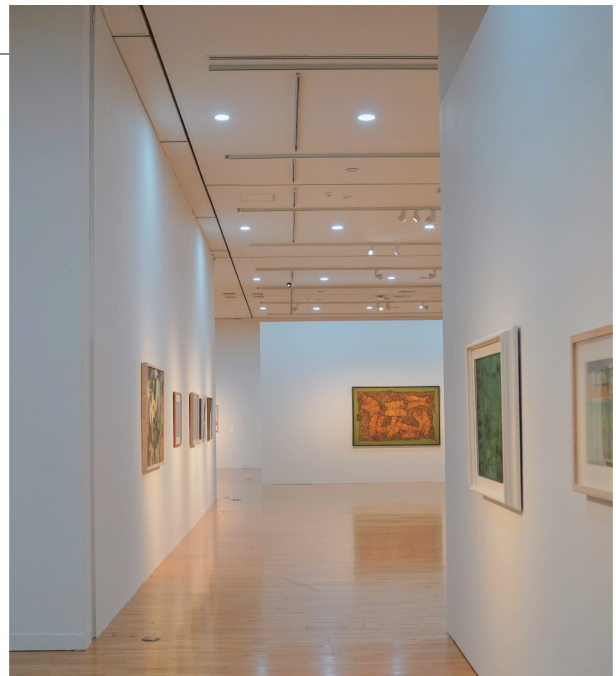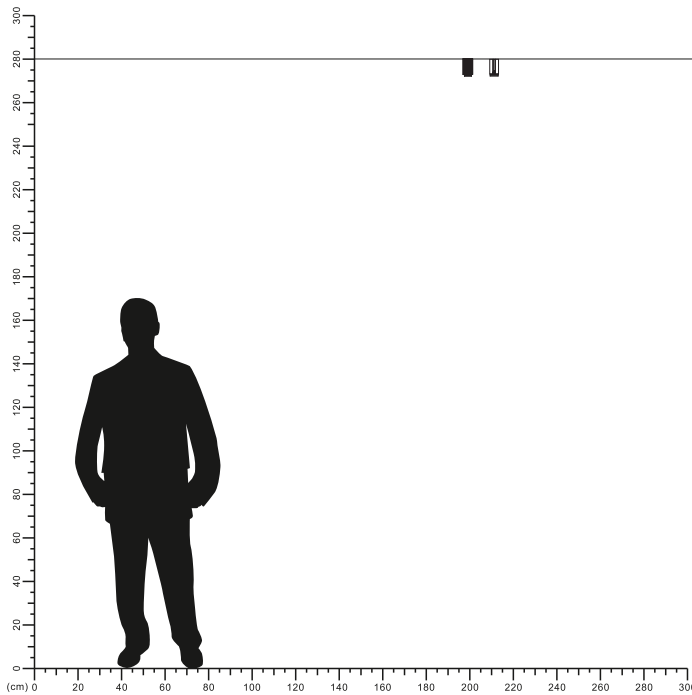


## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

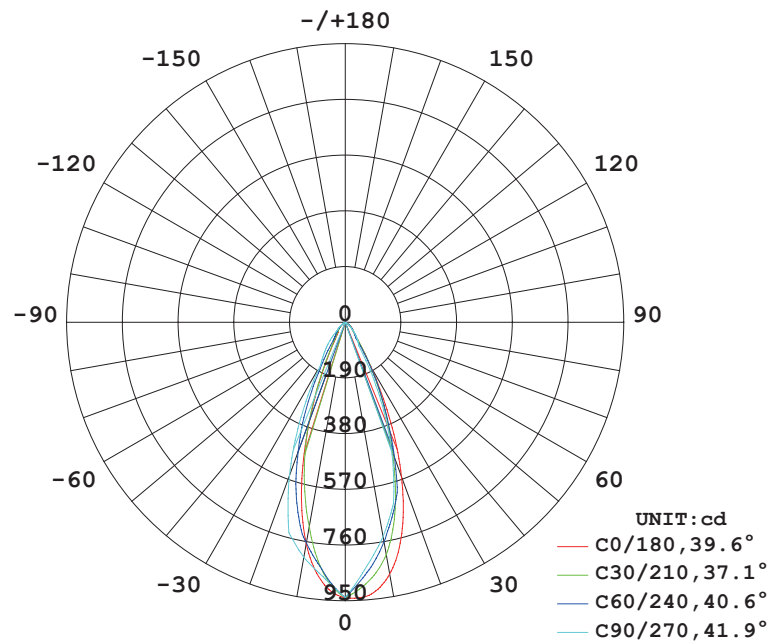


AVERAGE BEAM ANGLE (50%) : 39.8 DEG

## Illuminance at a Distance

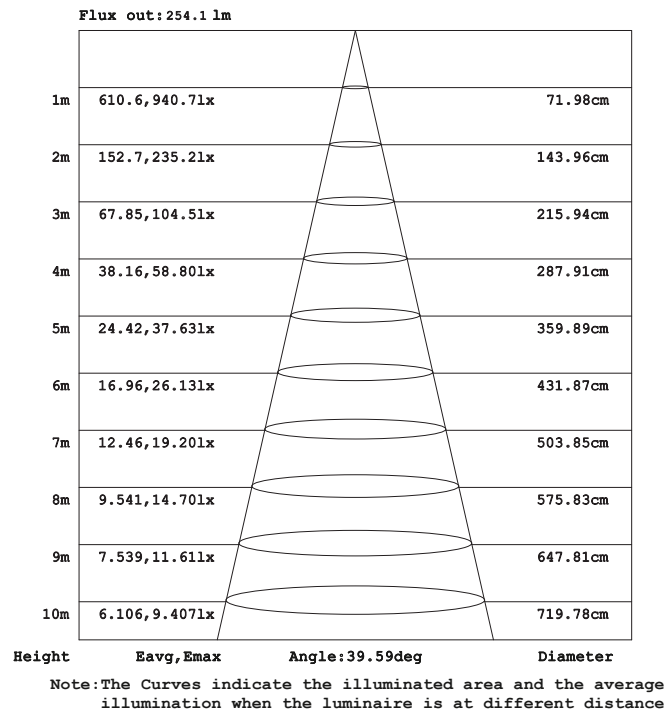


Model: NR-SLM102-5

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

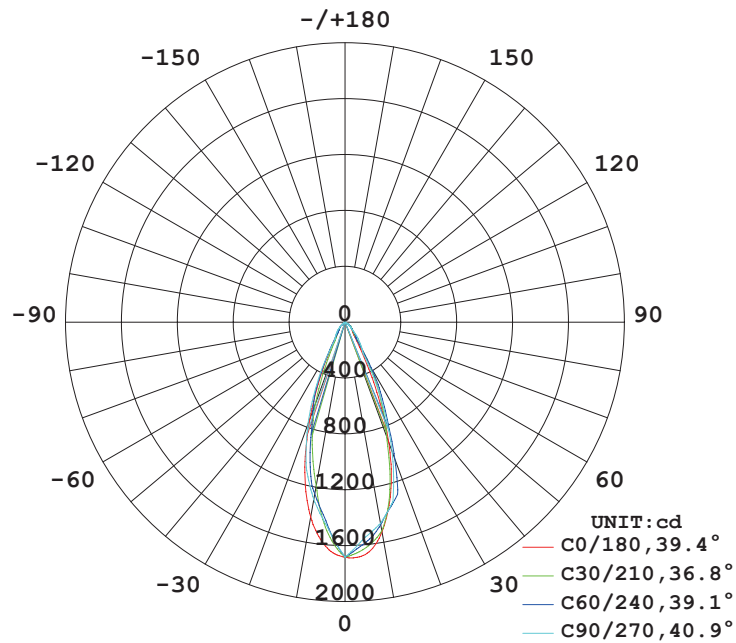



AVERAGE BEAM ANGLE (50%) : 39.1 DEG

## Illuminance at a Distance

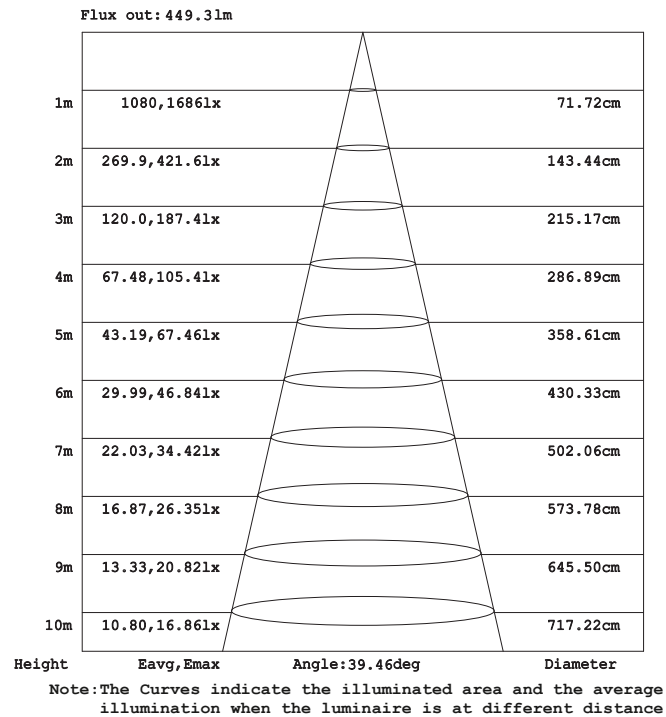


Model:NR-SLM102-10



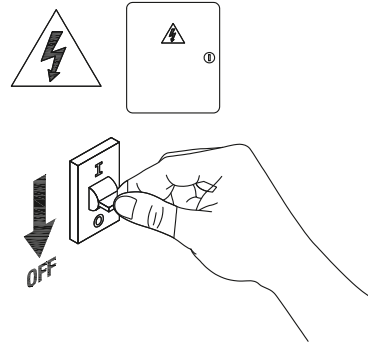


**1**

Turn off The Power




**2**

Cut a hole in the ceiling

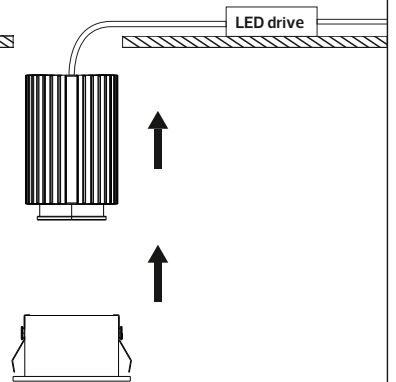


**3**

Stick NR-SLM102 into the lamp cup  
and into the ceiling

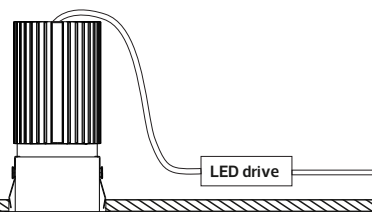

**4**

installaion is complete

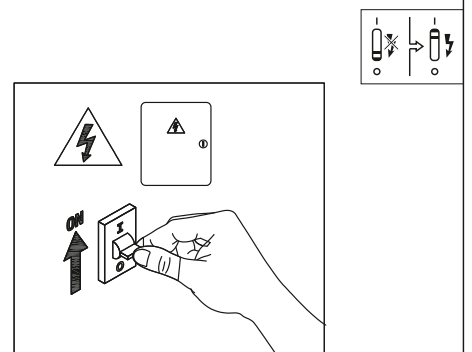

**5**

Turn on the power

