




LED Downlight

NR-SLM102 MR11 Series
IP20



Item Code	P (W)	CCT (K)	Beam angle	Output (lm)	lm/w	Dimensions in mm			kg
						A	B	C	
NR-SLM102-5	5	3000/4000	36°	355	71	Φ35	Φ38	73	0.18
NR-SLM102-10 3000K	10	3000	36°	850	85	Φ35	Φ47	75	0.23
NR-SLM102-10 4000K	10	4000	36°	750	75	Φ35	Φ47	75	0.23



Dimensions in mm

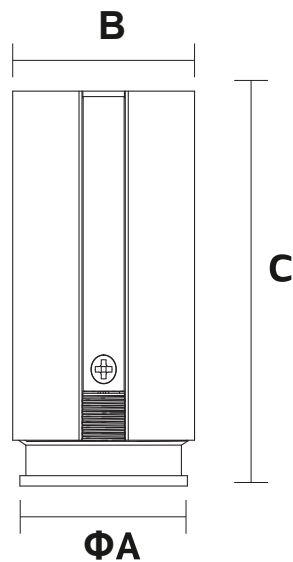

NR-SLM102-5



NR-SLM102-10

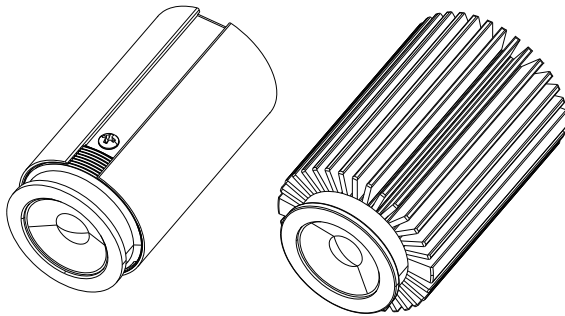
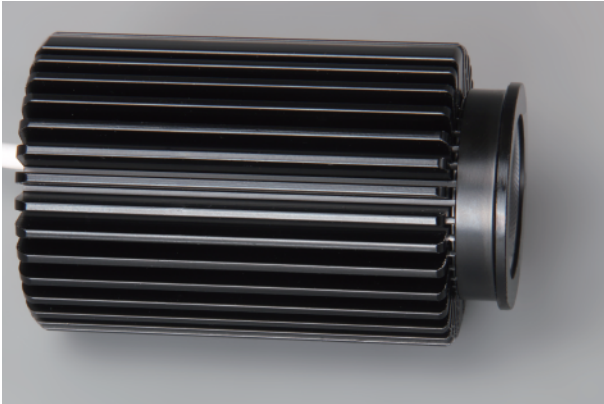


Description:
LED SLM102 Downlight


Main material:
Die-cast aluminum+Engineering plastics

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps High quality light, high color rendering, less heat, no UV or IR radiation LED driver is included IP20

Applications
. Shopping mall
. Office buildings
. Exhibition hall

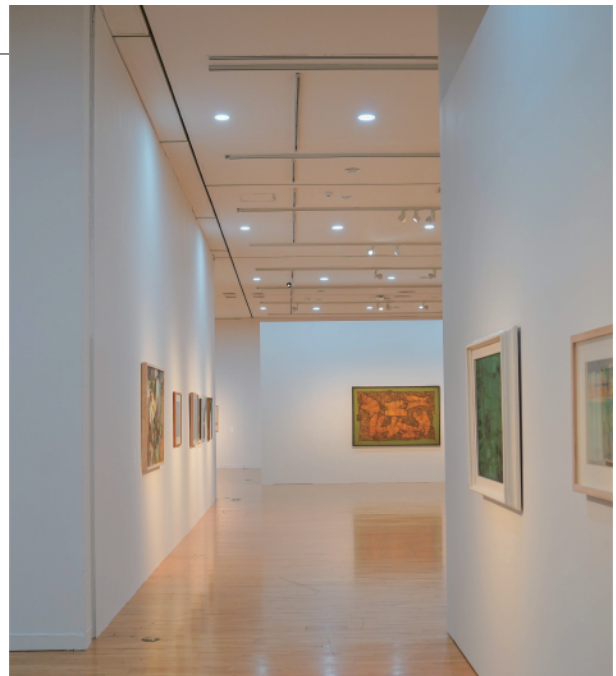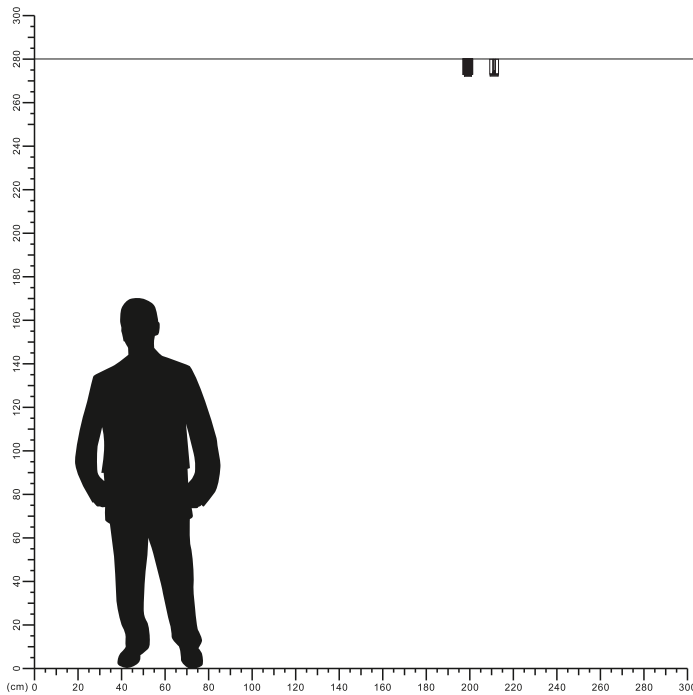


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

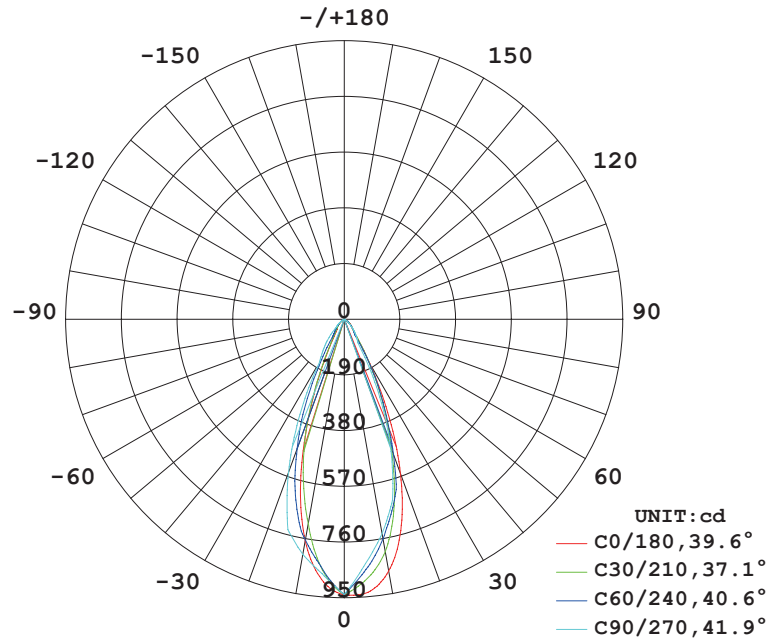


AVERAGE BEAM ANGLE (50%) : 39.8 DEG

Illuminance at a Distance

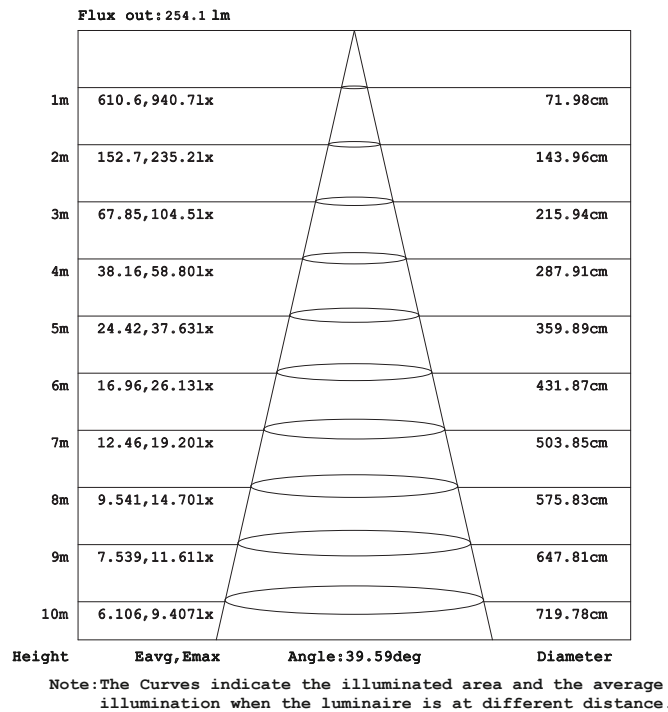


Model:NR-SLM102-5

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


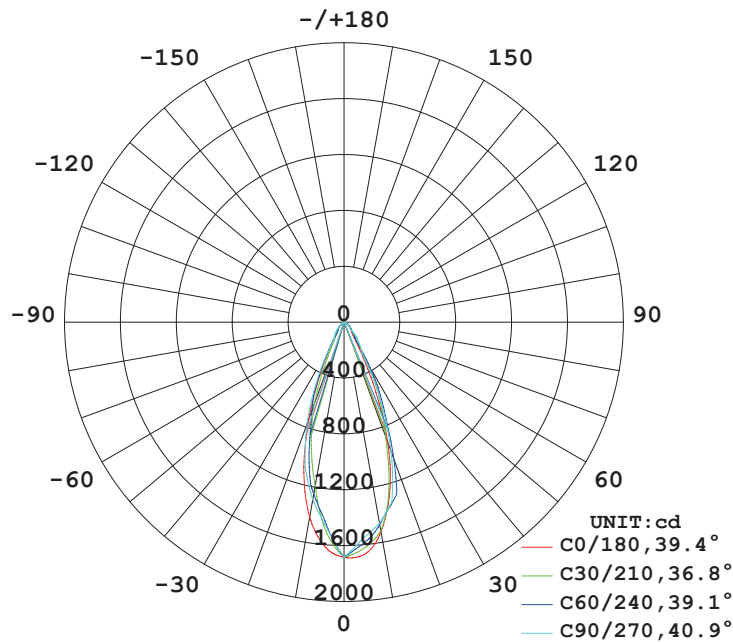


AVERAGE BEAM ANGLE (50%) : 39.1 DEG

Illuminance at a Distance

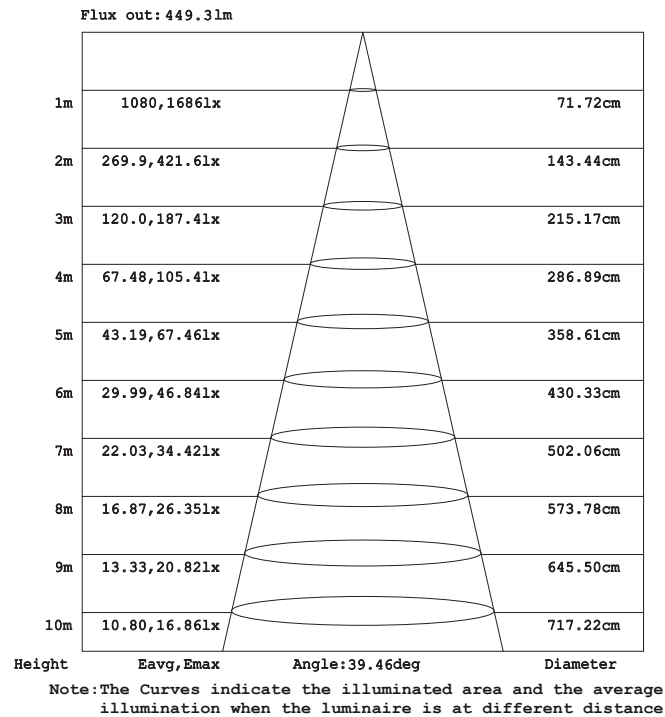


Model: NR-SLM102-10

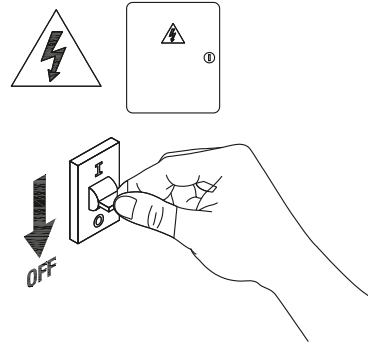


1

Turn off The Power




2

Cut a hole in the ceiling

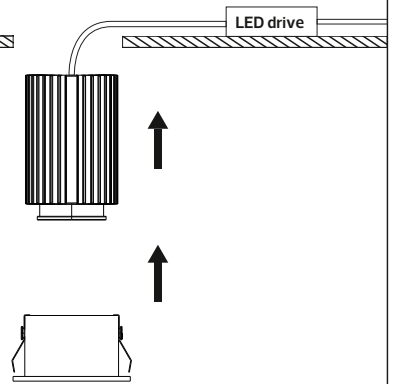


3

SticK NR-SLM102 into the lamp cup and into the ceiling

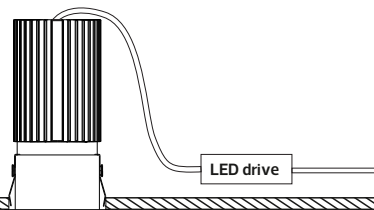

4

installaion is complete

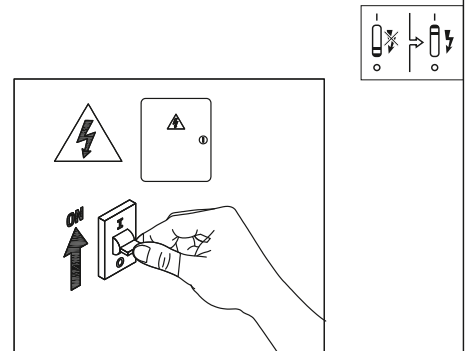

5

Turn on the power

