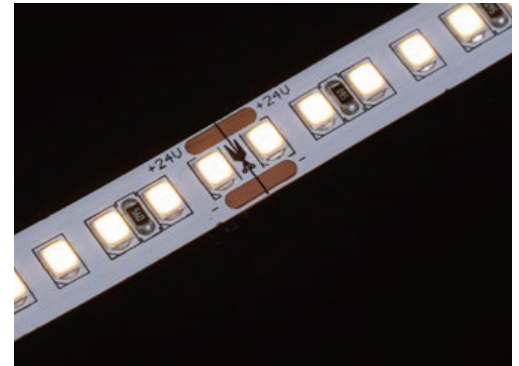


LED Strip Light

NR-ST24-120-9W


IP20




Indoor	DC 24V	Ra ≥90	IP20	Average 20,000 Hours	Ta 40°C	Operating Temp -20°C ~ 40°C	Material Aluminum Copper	Chips 2835 SMD	
--------	--------	--------	------	----------------------	---------	-----------------------------	--------------------------	----------------	--

Item Code	Input Voltage	Watt	Ra	Lm/M	Cutting (A)	LED QTY	LED Distance (B)	Beam Angle	IP	CCT
NR-ST24-120-9W-3000K	DC24V	9W/M	≥90	594lm	50mm	120Pcs/m	10mm	120°	IP20	3000K
NR-ST24-120-9W-4000K	DC24V	9W/M	≥90	594lm	50mm	120Pcs/m	10mm	120°	IP20	4000K

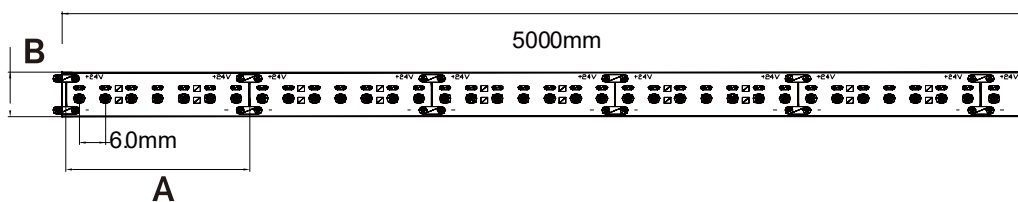Dimensions in mm



LED Strip Solution

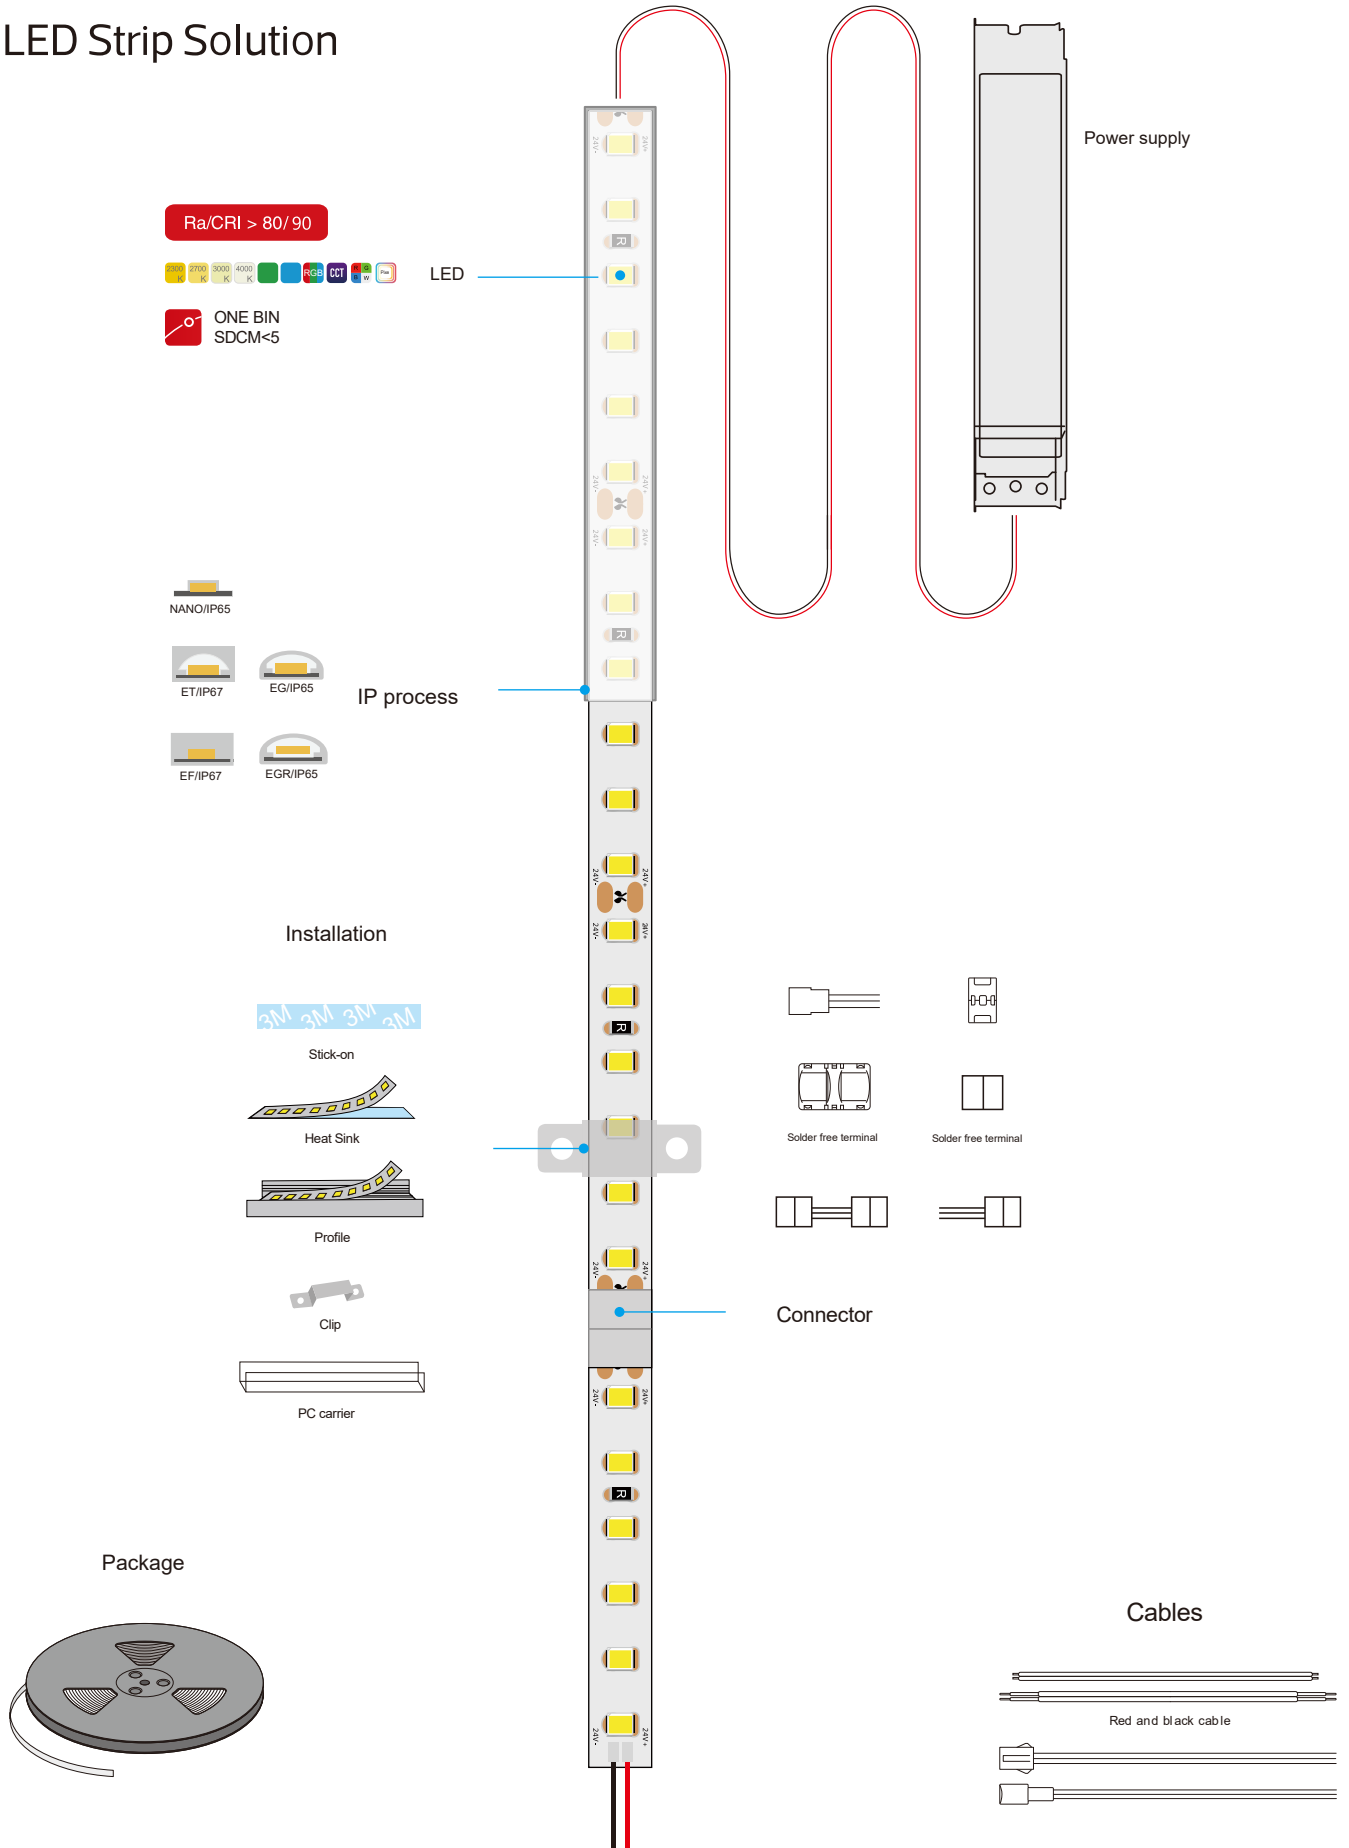


LED Strip Power Supply

Item Code	Input Voltage(AC)	Input Current(A)	Output Voltage(DC)	Output Current(A)	IP	Watt
NR-PS-60W	100-240V	0.6A	24V	2.5A	20	60
NR-PS102-24V-60W	100-240V	0.6A	24V	2.5A	20	60
NR-PS102-24V-60-IP65	100-240V	0.6A	24V	2.5A	65	60
NR-PS-100W	100-240V	1A	24V	4.2A	20	100
NR-PS102-24-150W	100-240V	1.5A	24V	6.3A	20	150
NR-PS-150W	100-240V	1.5A	24V	6.2A	20	150
NR-PS-360W	100-240V	3.6A	24V	15A	20	360



NOTE:the power supply should not exceed 80% of the rated power for long periods of time!




NR-PS-60W



NR-PS102-24V-60W



NR-PS102-24V-60-IP65



NR-PS-100W



NR-PS102-24-150W











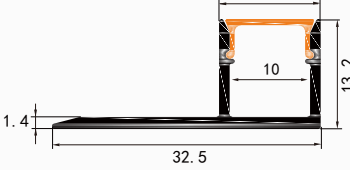


NR-PS-150W



NR-PS-360W

Recommended spare parts

Aluminium Profile

Picture	Item Code	Cross section dimension in mm	Match LED strip lights size
	NR-355		Max 12mm
	NR-XT-210		Max 12mm
	XT-226		Max 10mm
	XT-263		Max 12mm
	XT-283		Max 10mm
	PXG-506		Max 8mm
	PXG-618		Max 12mm

