




LED Mini Magnetic Track System


NR-MMDL0102-1-30K-BK-36D
IP20



Model No	P (W)	Using Track	CCT (K)	Output (lm)	lm/w	Color	kg
NR-MMDL0102-1-30K-BK-36D	1	NR-ST	3000	68	68	Black	0.01

Dimensions in mm

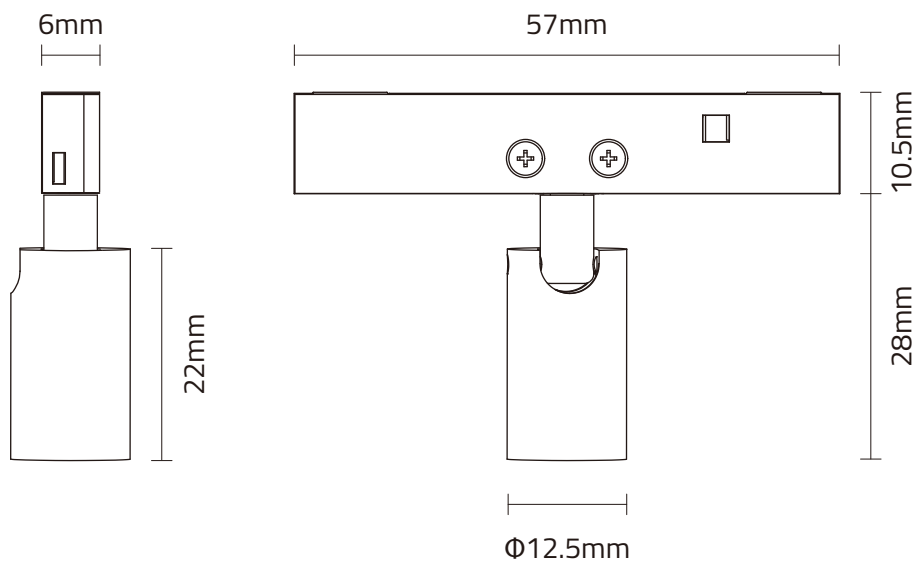

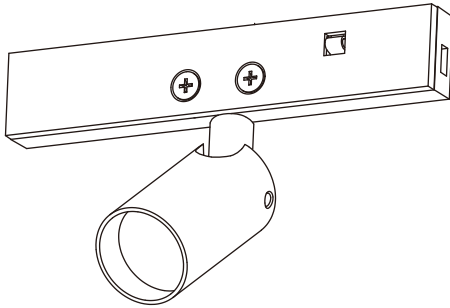


Description:
LED Mini Magnetic Track System


Main material:
Aluminum+Pc

Specification:
Aluminum lamp body, fine work, corrosion rust prevention, durable.
High transmission Pc material lamp shade, anti aging, long service life.
IP20

Applications
.Office
.Meeting room
.Sitting room

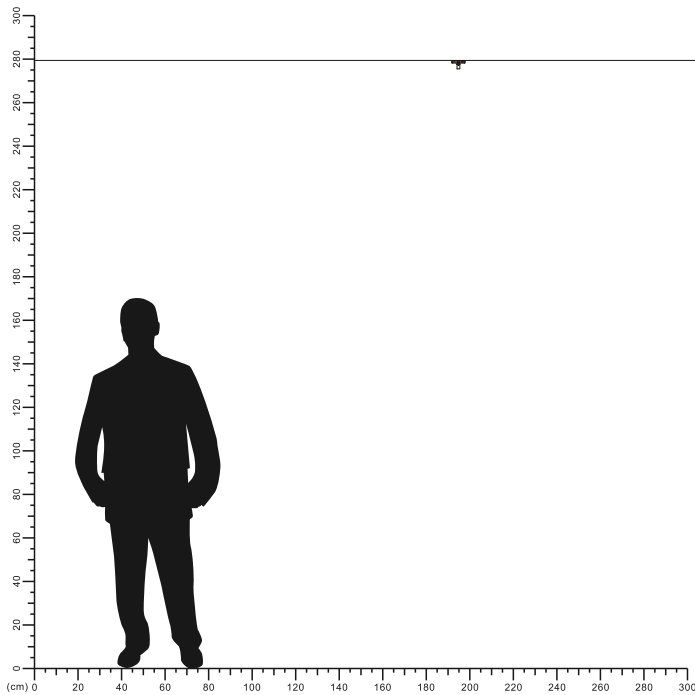


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

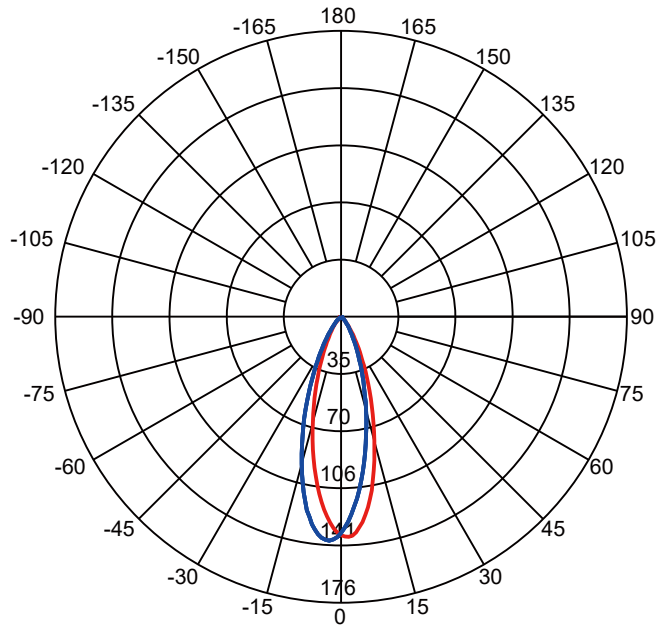


Beam Angle(50%) C0-180,C90-270: 31.9 deg,32.5 deg

C0-180 — C90-270 —


Illuminance at a Distance

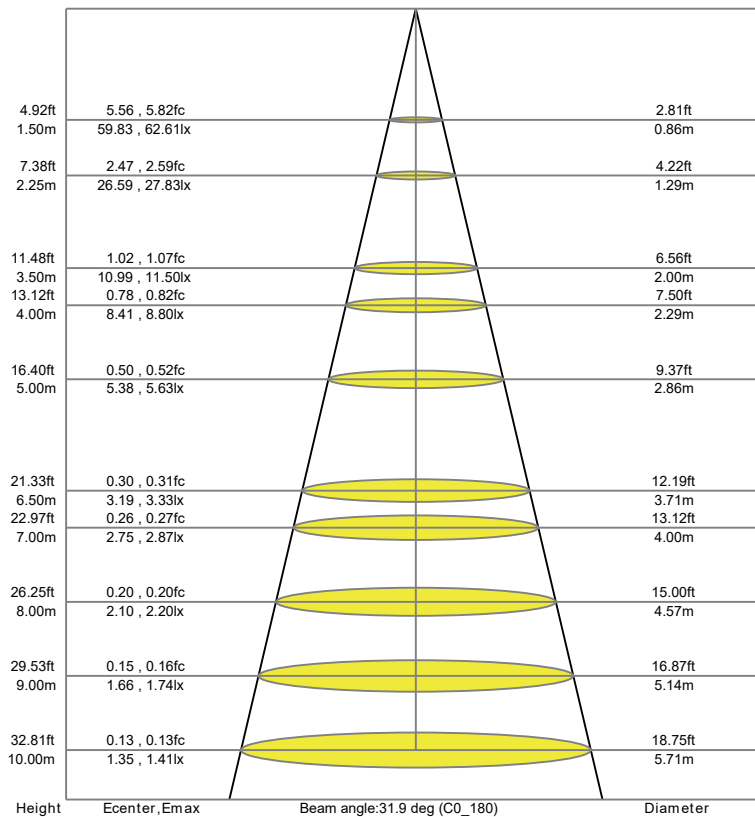

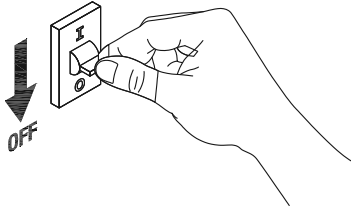


1

Turn off The Power

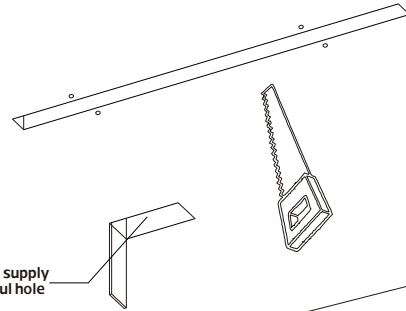


2

Cutting holes in and ceilings

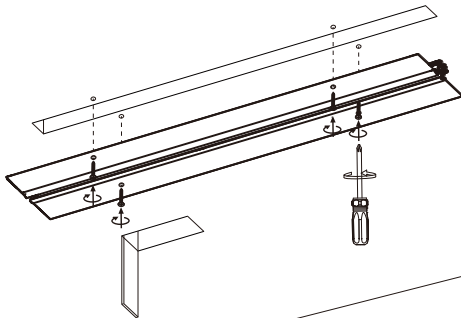


3

Install track

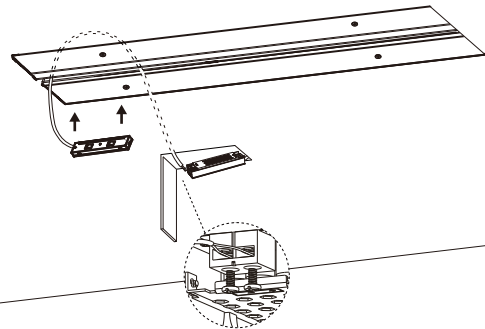


4

Connect the DC24V power supply, cover good power supply cover

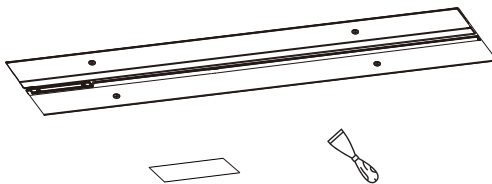


5

Fan ash to cover the track

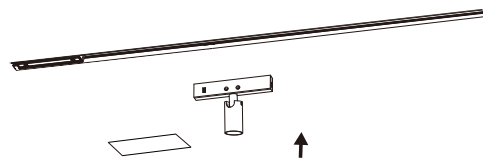

6


Install lamp body

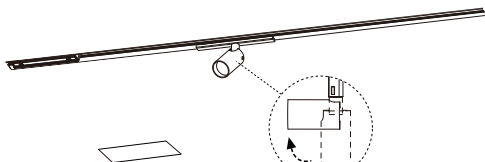

The maximum rotation angle of the lamp head is 90°

7

Adjust the angle according to the usage Installation completed



8

Turn on the power

