




LED Strip Light


NR-ST Series

IP65

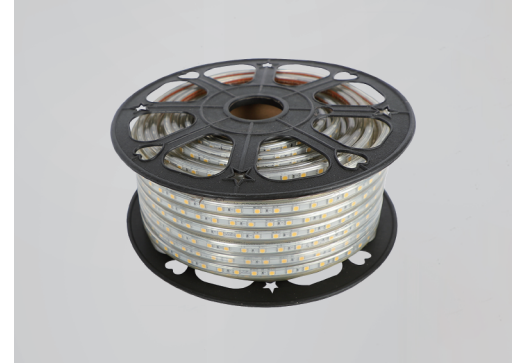


Model No	Body Size	Cutting Unit	Input Voltage	Watt/M	Lm/M	Max. Length	Beam Angle	CCT
NR-ST104-7	W14.7x7.3mm	60LEDs/1m	AC200-240V	7W	455lm	65m	120°	6500K
NR-ST104-7 DW	W14.7x7.3mm	60LEDs/1m	AC200-240V	7W	455lm	65m	120°	4000K
NR-ST104-7WW	W14.7x7.3mm	60LEDs/1m	AC200-240V	7W	455lm	65m	120°	3000K
NR-ST104-7 SW	W14.7x7.3mm	60LEDs/1m	AC200-240V	7W	455lm	65m	120°	2700K
NR-ST101-RGB	W14.7x7.3mm	60LEDs/1m	AC200-240V	7W	250lm	50m	120°	RGB
NR-ST101-R	W14.7x7.3mm	60LEDs/1m	AC200-240V	7W	120lm	50m	120°	Red
NR-ST101-G	W14.7x7.3mm	60LEDs/1m	AC200-240V	7W	360lm	50m	120°	Green
NR-ST101-B	W14.7x7.3mm	60LEDs/1m	AC200-240V	7W	90lm	50m	120°	Blue
NR-ST101-V	W14.7x7.3mm	60LEDs/1m	AC200-240V	7W	120lm	50m	120°	Purple


Dimensions in mm

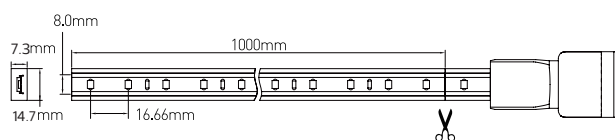

POLAR AND CONE DIAGRAM

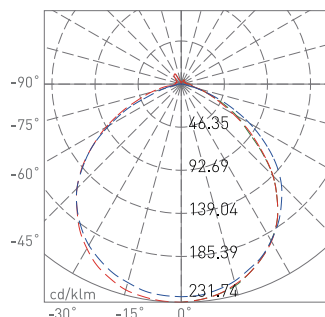

PHOTOMETRIC OF 1M STRIP

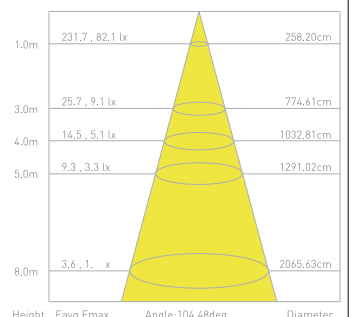

Product Features:

Stable output

No stroboscopic

anti-interference


IP65

Stable power supply, longer life



NO	Model No	power	Input Voltage	PF	Output	Size	Matching series
1	NR-ST101-DR-150W06	150W	AC220-240V 50/60Hz	PF≥0.9	226V 0.63A DC	L119xW31.5xH29mm	NR-ST101 Series
2	NR-ST101-DR-250W11	250W	AC220-240V 50/60Hz	PF≥0.9	226V 1.10A DC	L145.8xW42xH33mm	NR-ST101 Series



LED Strip Solution

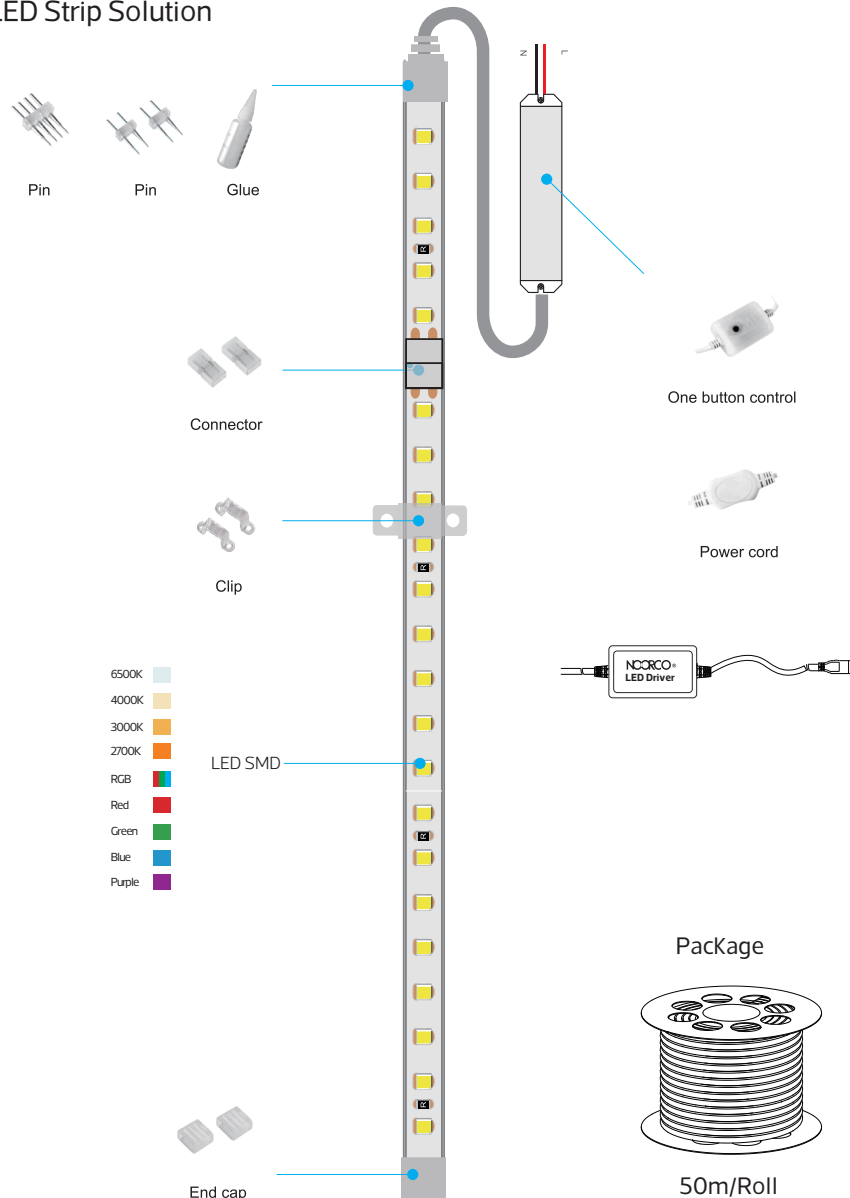




Installation step

⚠ Before finish the installation , do not connect the power

1. According to practical demand , Fix the strip with clip and screws in needed place
(The strip is good flexibility for any shape)

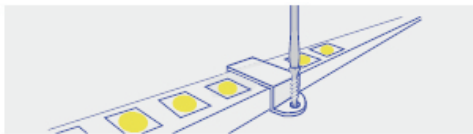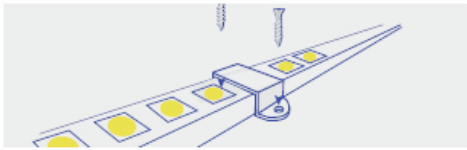


2. Use H shape pin to connect the strip and power supply cord .Then glue the interface

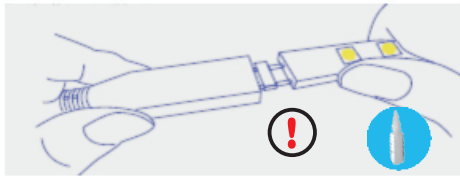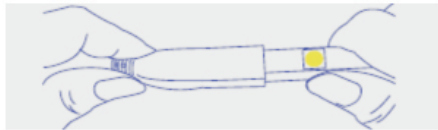


⚠ Must use the designative glue to glue the interface

3. Cut the strip according to your requirement (each 1 meter can be cut for 220V strip .)

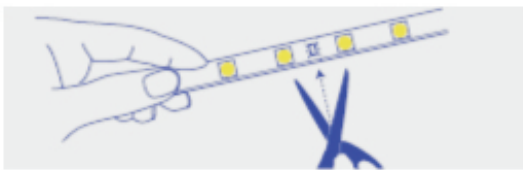


⚠ Detail cutting mark mentioned in next page

4. Close the strip with end cap and glue with the designative glue for safety and waterproof

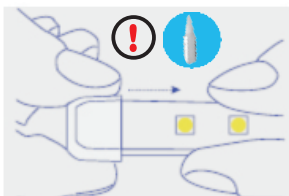


⚠ Must use the designative glue to glue the interface


RoHS

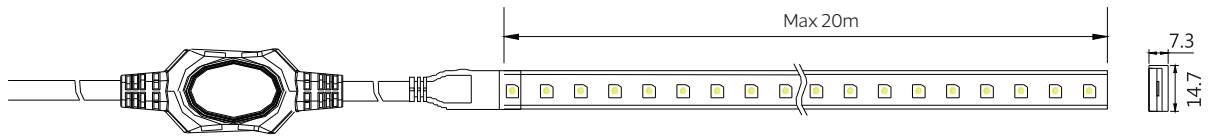

Power Cord installation

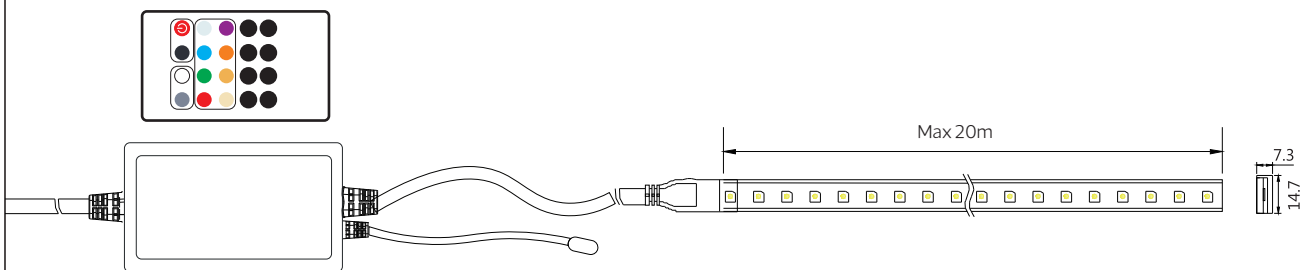

RGB Remote Control installation

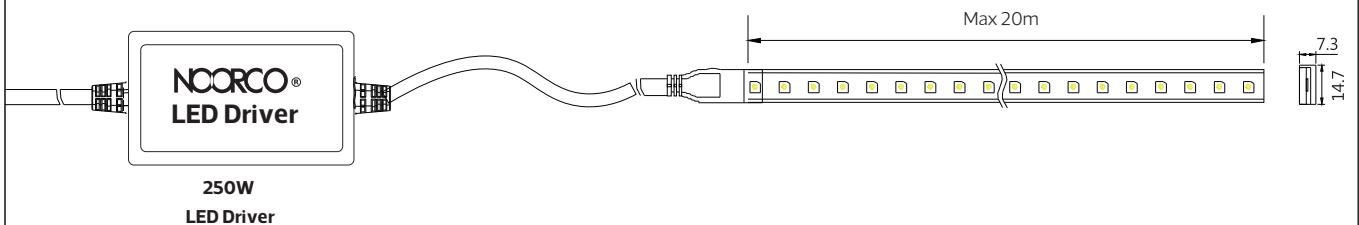

LED Driver installation



Connector



Glue



Power cord



Pin



Clip



End cap

Accessories



RGB remote control



Pin



One button control



Glue



Connector




Clip



End cap

RGB Accessories



Connector



Glue



Pin



Clip



End cap

LED Driver Accessories

