


LED Magnetic Track System


NR-TG105-15

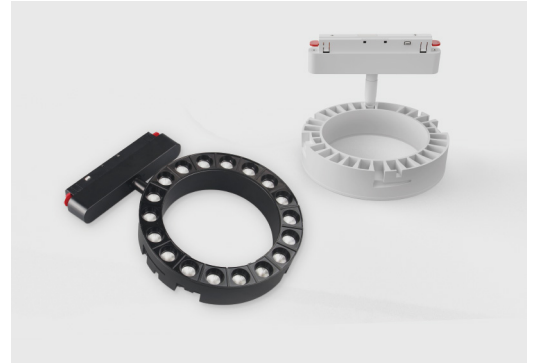


Indoor	DC 48V	CCT 6500K 4000K 3000K	Ra ≥90	Average 30,000 Hours	ON OFF ≥15,000	IP20	Beam Angle 36°	Chips COB	
--------	-----------	--------------------------------	-----------	----------------------------	-------------------	------	----------------------	--------------	--

Item Code	P(W)	Color	Using Track	Total Lumen	Beam Angle	Dimensions in mm				
						A	B	C	D	kg
NR-TG105-15	15	Black/White	NR-S20/NR-S35	1155	36°	165	Φ158	120	35	0.38

Dimensions in mm

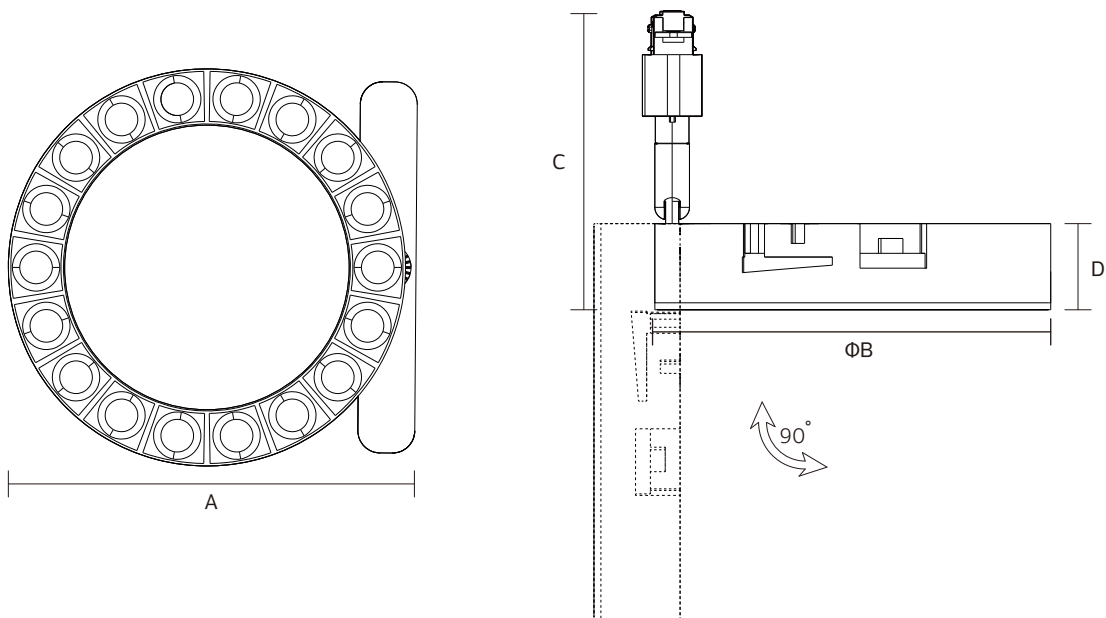


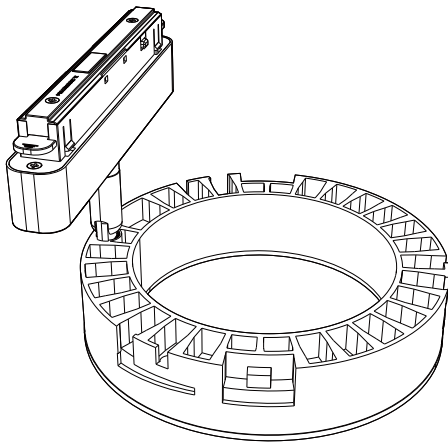


Description:
LED Magnetic Track System


Main material:
Aluminum shell, Silica gel

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

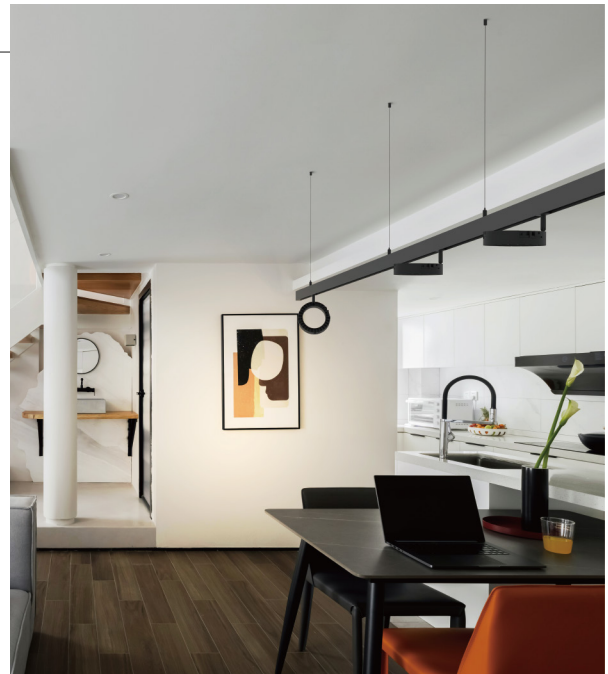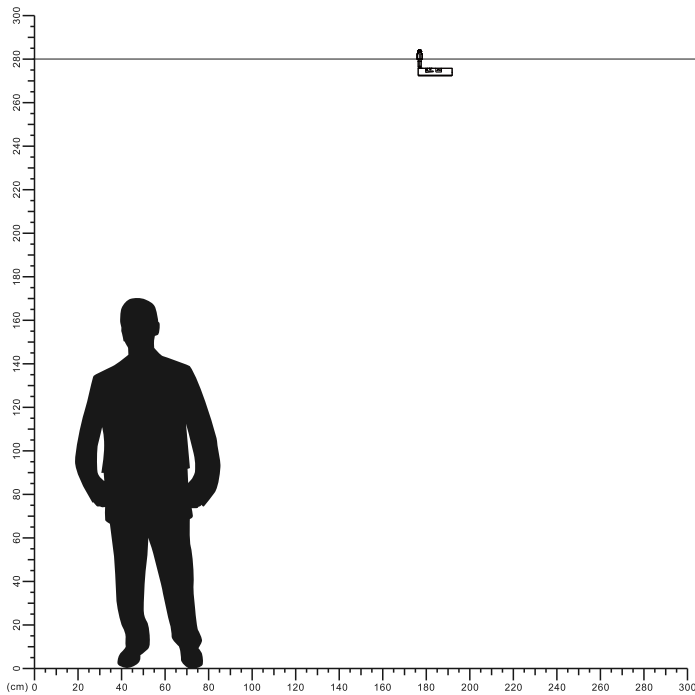

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

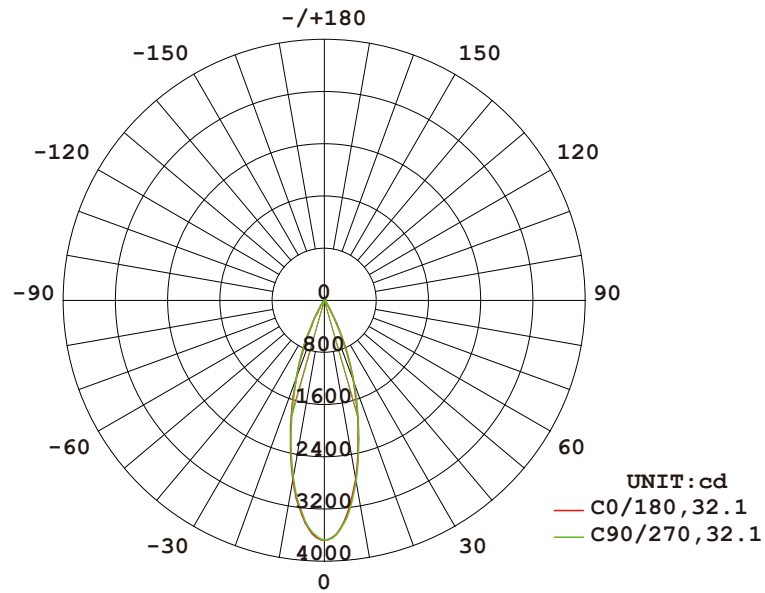

AVERAGE BEAM ANGLE (50%) : 32.1 DEG

Illuminance at a Distance

Flux out: 697.9 lm

Height	Eavg, Emax	Angle: 32.08deg	Diameter
1.219m	1599, 2474 lx		70.11cm
2m	594.2, 919.3 lx		115.01cm
3m	264.1, 408.6 lx		172.51cm
4m	148.5, 229.8 lx		230.01cm
5m	95.07, 147.1 lx		287.52cm
6m	66.02, 102.1 lx		345.02cm
7m	48.50, 75.05 lx		402.52cm
8m	37.14, 57.46 lx		460.03cm
9m	29.34, 45.40 lx		517.53cm
10m	23.77, 36.77 lx		575.03cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

