





LED Track Light

NR-TL-CLB60-10
IP20

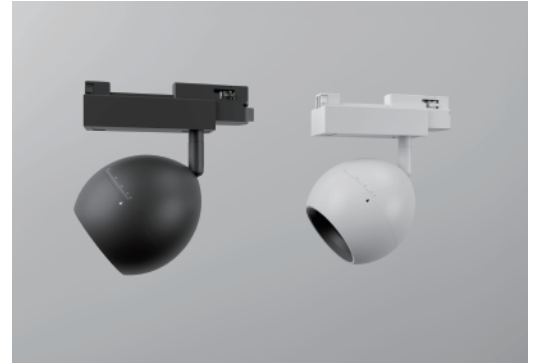


Item Code	P(W)	Total Lumen	LM/W	Beam Angle	Dimensions in mm			
					A	B	C	
NR-TL-CLB60-10	10	850	85	15°-50°	150	Φ100	186	0.50

Dimensions in mm

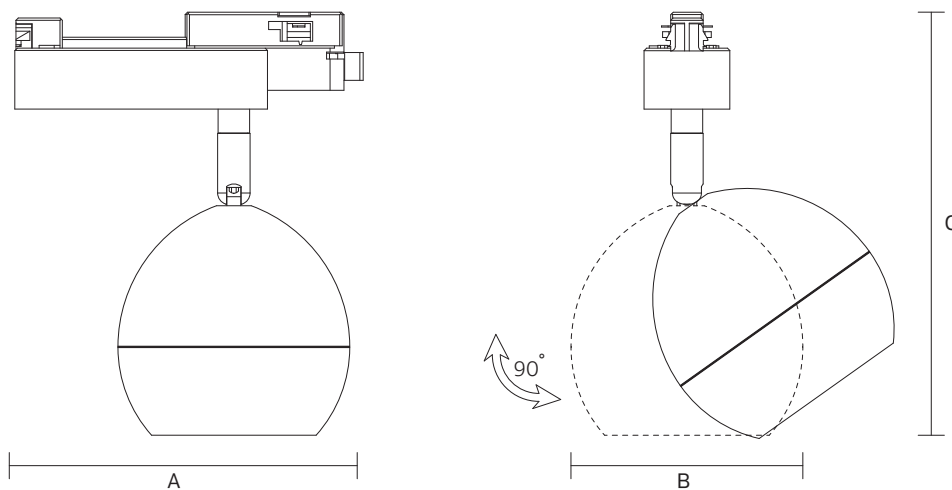


Surface Tracker

Item Code	Color	Installation Type	Dimensions in mm			
			A	B	C	
NR-TL110-1-M-WH	White	Surface	1000	34	20	0.41
NR-TL110-1-M-BK	Black	Surface	1000	34	20	0.41
NR-TL110-2-M-WH	White	Surface	2000	34	20	0.84
NR-TL110-2-M-BK	Black	Surface	2000	34	20	0.84
NR-TL110-7-M-WH	White	Surface	7000	34	20	3.10
NR-TL110-7-M-BK	Black	Surface	7000	34	20	3.10

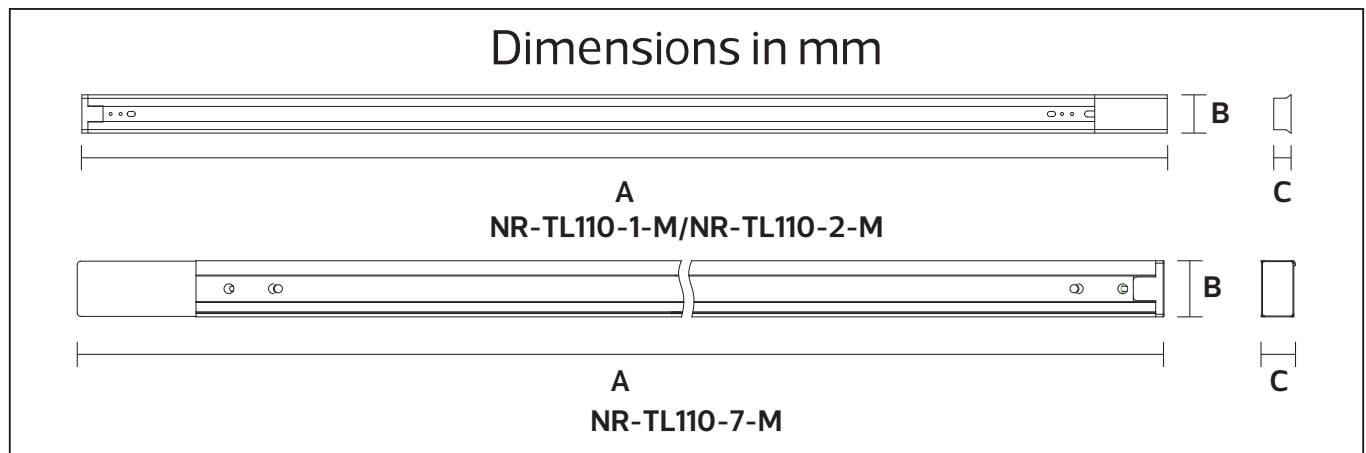


Recessed Tracker

Item Code	Color	A	Dimensions in mm			
			B1	B2	C	
NR-CTL110-1-M-W	White	1000	33.5	60	20	0.44
NR-CTL110-1-M-BK	Black	1000	33.5	60	20	0.44
NR-CTL110-2-M-W	White	2000	33.5	60	20	0.88
NR-CTL110-2-M-BK	Black	2000	33.5	60	20	0.88

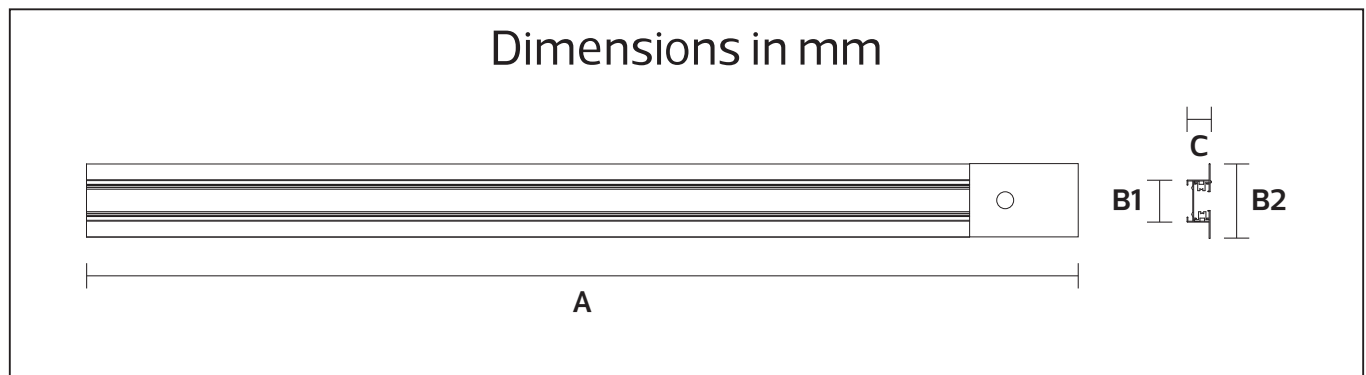

Surface Tracker Accessories



Item Code	Color	Dimensions in mm		 kg
		A	B	
NR-TL120-90-W	White	66	66	0.03
NR-TL120-90-BK	Black	66	66	0.03
NR-TL120-180-W	White	95	36	0.06
NR-TL120-180-BK	Black	95	36	0.06
NR-TL120-270-W	White	95	66	0.08
NR-TL120-270-BK	Black	95	66	0.08
NR-TL120-360-W	White	95	95	0.10
NR-TL120-360-BK	Black	95	95	0.10
NR-TL120-W	White	210	32	0.03
NR-TL120-BK	Black	210	32	0.03
NR-TL120-480	Black	280	34	0.11

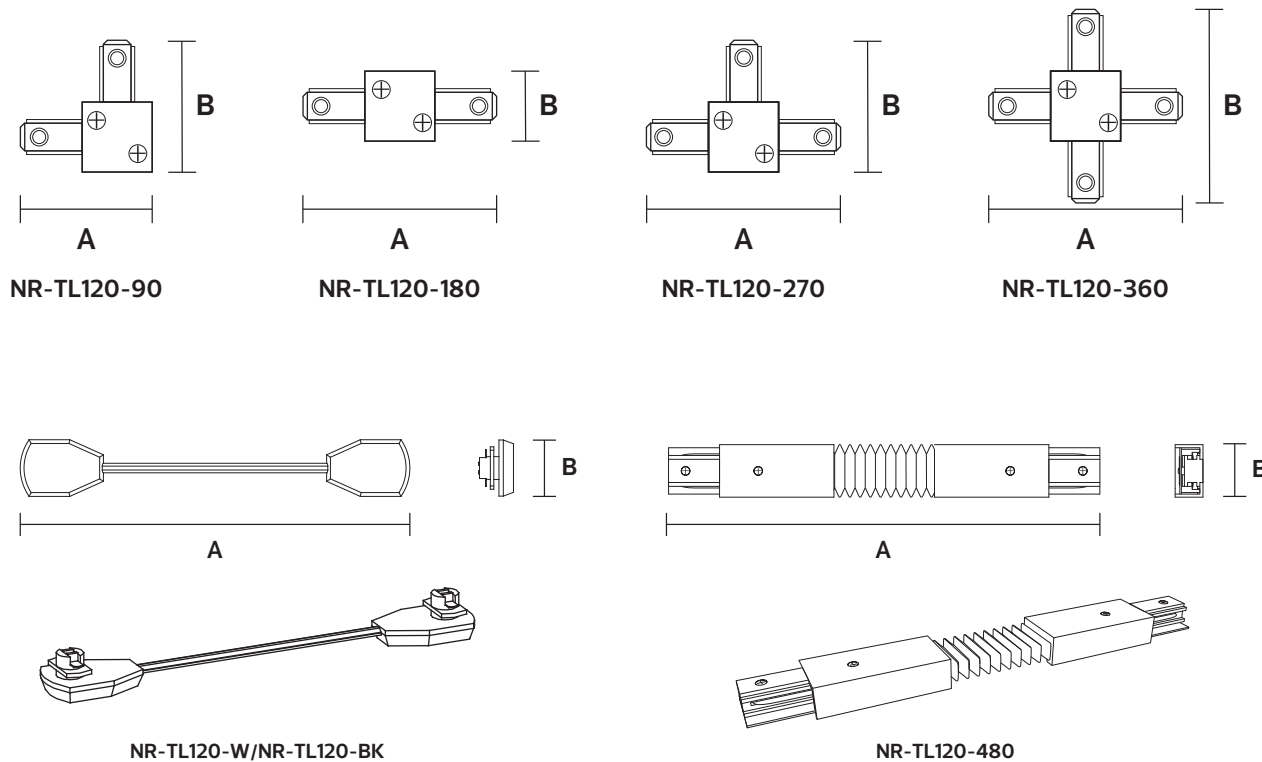Dimensions in mm





Surface Tracker Accessories

Item Code	Color	Dimensions in mm			
		A	B	C	
NR-TL120-ACS-WH	White	45	31.8	9	0.02
NR-TL120-ACS-BK	Black	45	31.8	9	0.02
NR-TL120-ACS	Copper	24.6	11.2	/	0.02



Dimensions in mm



NR-TL120-ACS-WH/NR-TL120-ACS-BK








NR-TL120-ACS

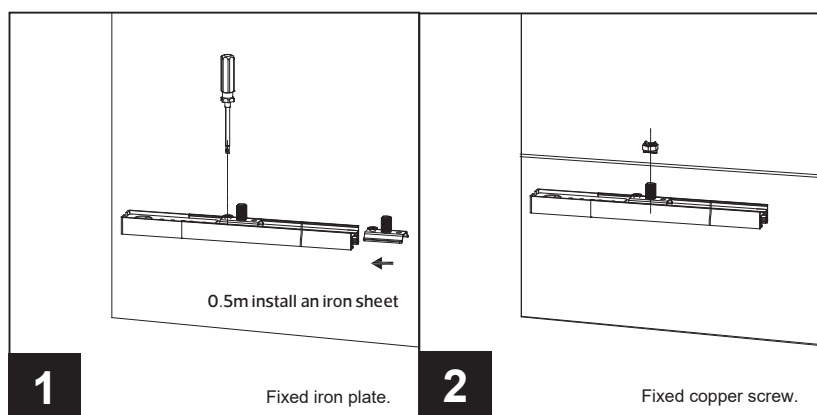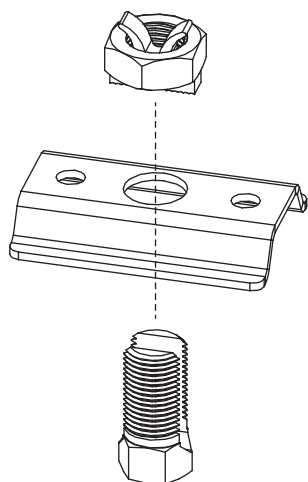


Recessed Tracker Accessories

Item Code	Color	Dimensions in mm		 kg
		A	B	
NR-CTL120-90-W	White	66	66	0.03
NR-CTL120-90-BK	Black	66	66	0.03
NR-CTL120-180-W	White	95	36	0.06
NR-CTL120-180-BK	Black	95	36	0.06
NR-CTL120-T-W	White	95	66	0.08
NR-CTL120-T-BK	Black	95	66	0.08
NR-CTL120-CROSS-W	White	95	95	0.10
NR-CTL120-CROSS-BK	Black	95	95	0.10
NR-CTL120-ACS	Black	95	66	0.10

Dimensions in mm


NR-CTL120-90

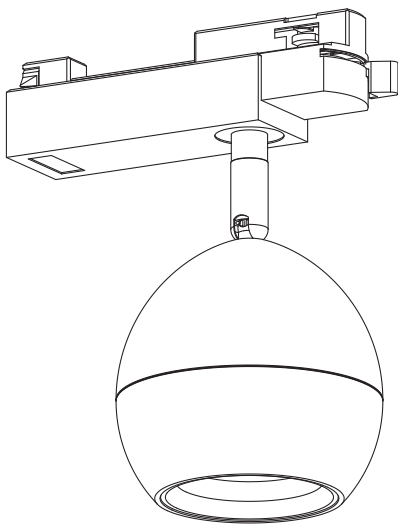NR-CTL120-180

NR-CTL120-T

NR-CTL120-CROSS

NR-CTL120-ACS



Description:

LED Track Light

Main material:



Engineering plastic high quality aluminum.

Specification:


Energy saving, up to 85% energy saving comparing to standard halogen and in candescent lamps Long life, up to 30,000 hours High quality light, High color rendering, less heat, no UV or IR radiation Build-in LED driver.

Applications


- .Shopping mall
- .Office buildings
- .Exhibition hall
- .Public lighting places

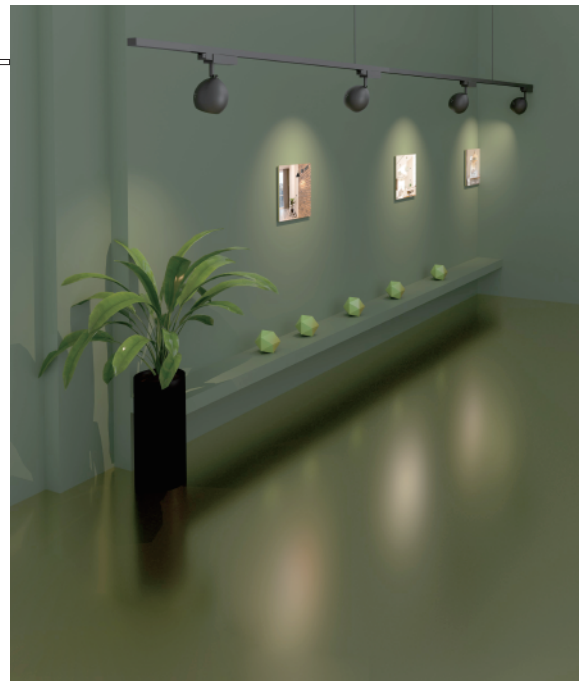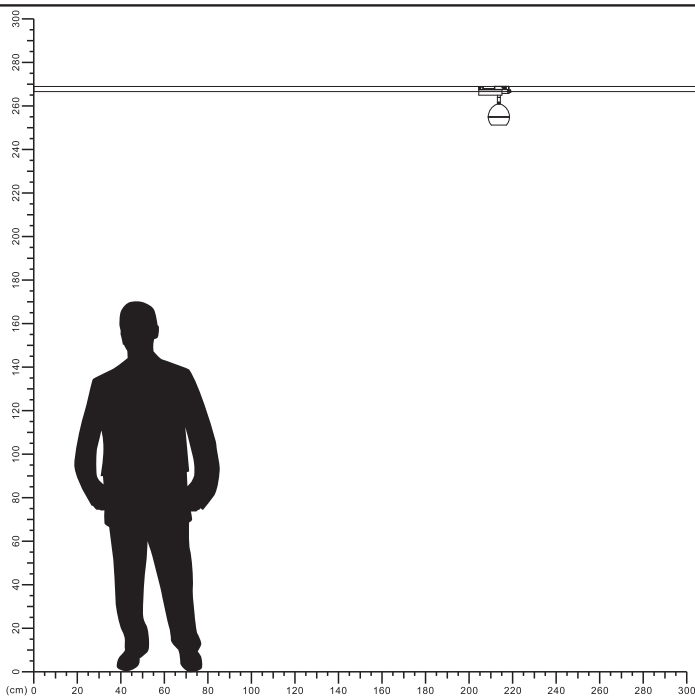

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

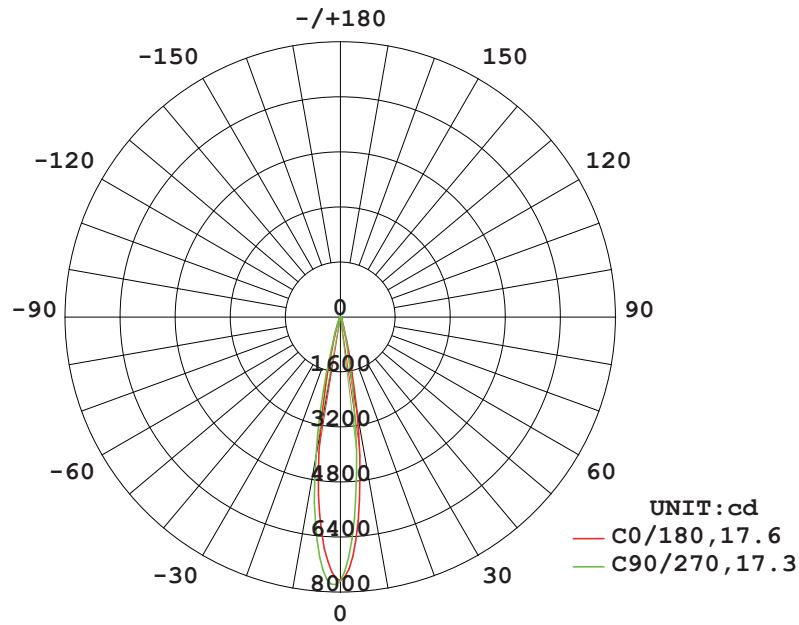


Illuminance at a Distance

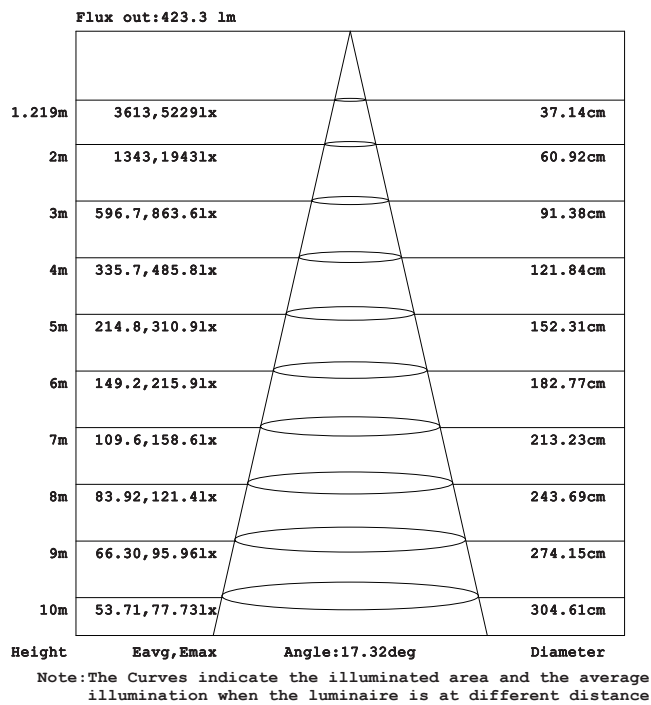


Model: NR-TL-CLB60-10 15°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

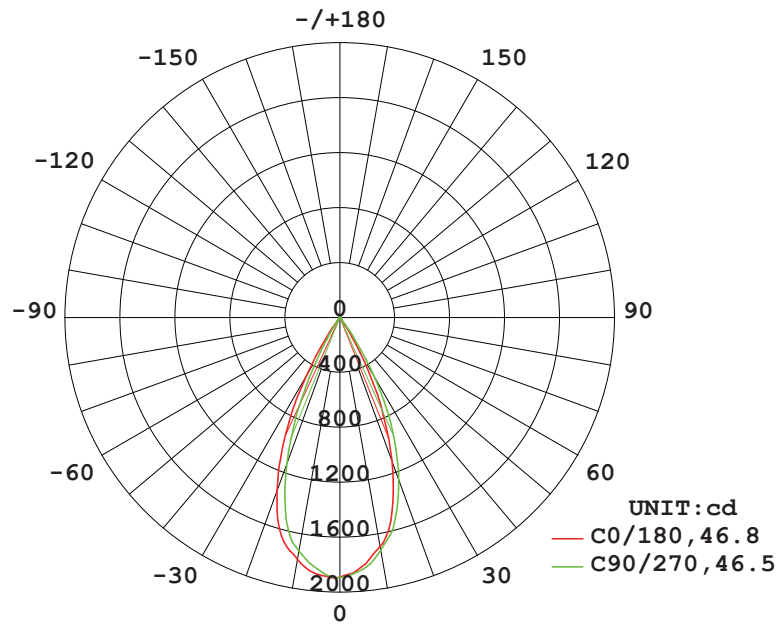

AVERAGE BEAM ANGLE (50%) : 46.7 DEG

Illuminance at a Distance

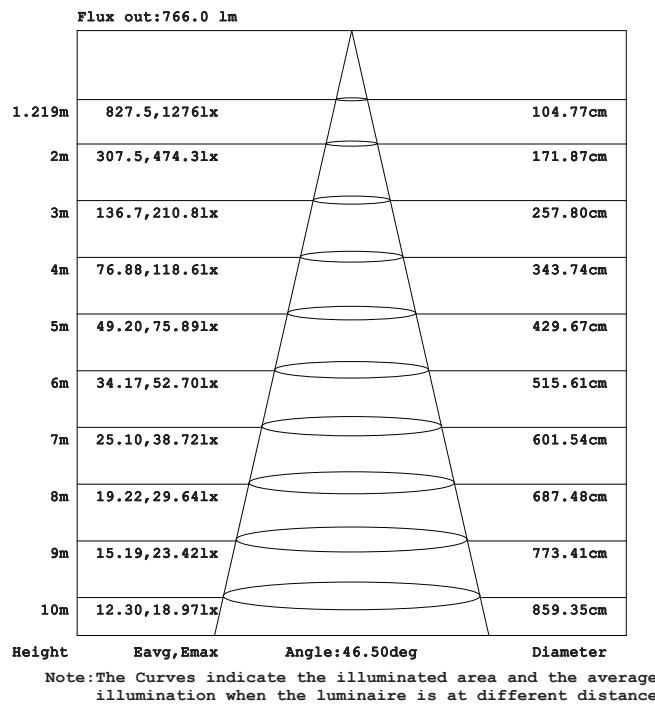

Model: NR-TL-CLB60-10 50°

