



# **LED Outdoor Wall Lamp**

NR-W916S-24W **IP65** 

































Item Code	P(W)	CCT(K)	Beam angle	Output (lm)	lm/w	Dimei A	nsions i B	n mm C	kg
NR-W916S-24W	24	3000/4000/6500	120°	1776	74	220	220	60	0.96

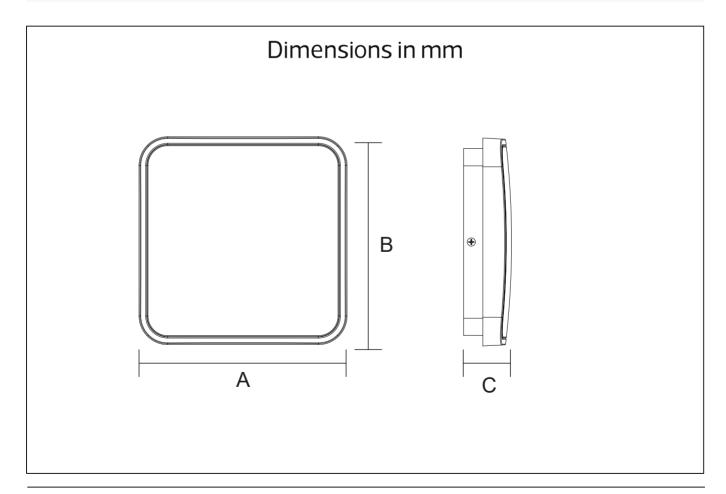








**Description:** LED Outdoor Wall Lamp

# **Main material:** Aluminum+Glass

**Specification**Energy saving, up to 85% energy saving comparing to standard halogen and incandescent High quality light, high color rending, less heat, no UV or IR radiation Build-in LED Driver

IP65


- Applications
  . ParK
  . Square
  . Tourist attraction
  . Corridor

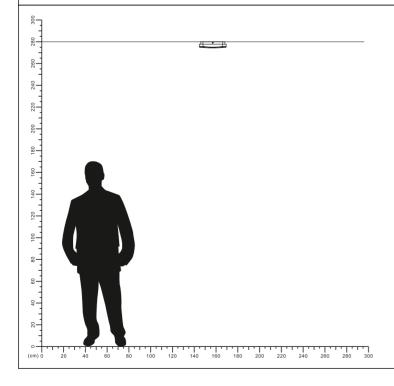






### **LUMINOUS INTENSITY DISTRIBUTION DIAGRAM**

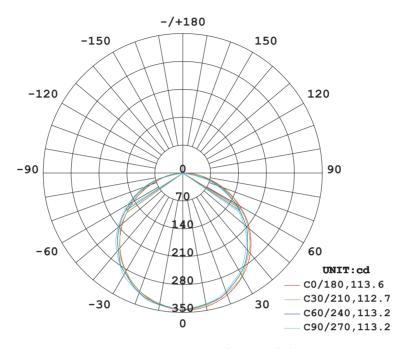

AVERAGE BEAM ANGLE (50%):113.2 DEG

# Illuminance at a Distance



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



