



LED OUTDOOR BURIED LAMP

NR-BL Series


NR-UL0151-18-30K-SL-36D


IP67



Model No	P (W)	CCT(K)	Output (lm)	Beam angle	Hole Size (mm)	Dimensions in mm			
						A	B	C	
NR-BL0152-5-30K-SL-24D	5	3000	450	24°	143x78x90	150	90	90	1
NR-BL0151-6-30K-SL-36D	6	3000	390	36°	293x78x90	300	90	90	1.97
NR-BL0152-9-30K-SL-36D	9	3000	585	36°	493x78x90	500	90	90	3.13
NR-UL0151-18-30K-SL-36D	18	3000	1332	36°	993x78x90	1000	90	90	5.45
NR-BL0151-9-30K-SL-36D	9	3000	585	36°	293x78x90	300	90	90	1.97
NR-BL0151-15-30K-SL-36D	15	3000	1074	36°	493x78x90	500	90	90	3.13
NR-BL0151-24-30K-SL-36D	24	3000	1776	36°	993x78x90	1000	90	90	5.45

Dimensions in mm

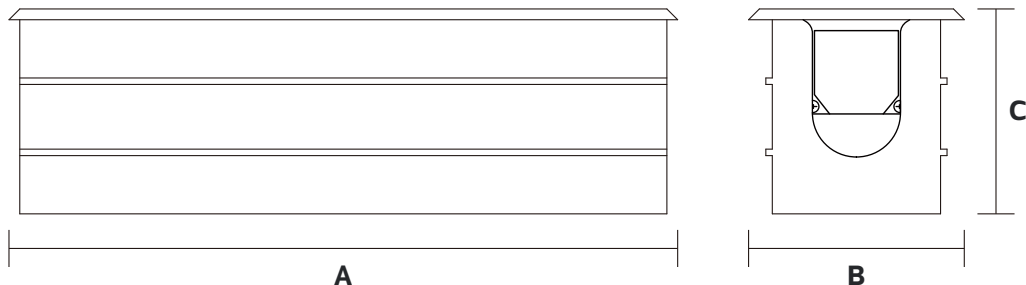


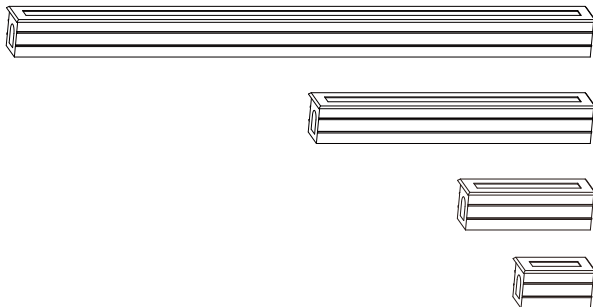


Description:
LED OUTDOOR BURIED LAMP


Main material:
Die-cast aluminum+Stainless steel+PC

Specification
Energy saving, up to 85% energy saving
comparing to standard halogen and incandescent
lamps
High quality light, high color rendering, less heat,
no UV or IR radiation
Build-in LED Driver
IP67

Applications
• Park
• Square
• Tourist attraction
• Corridor

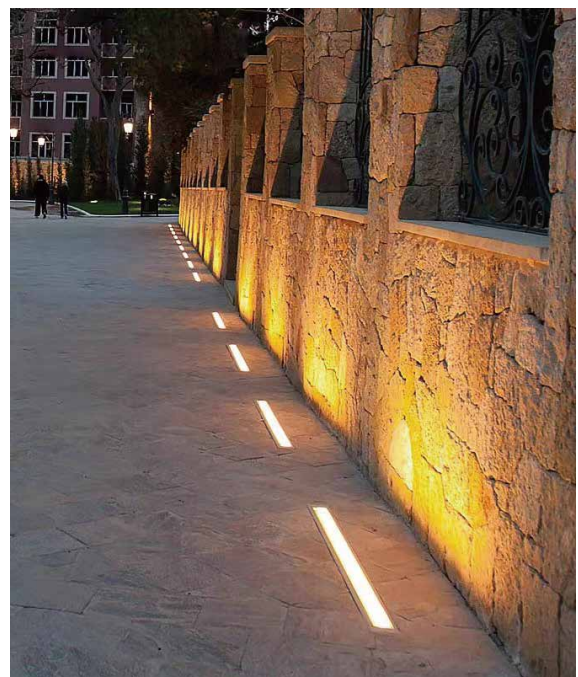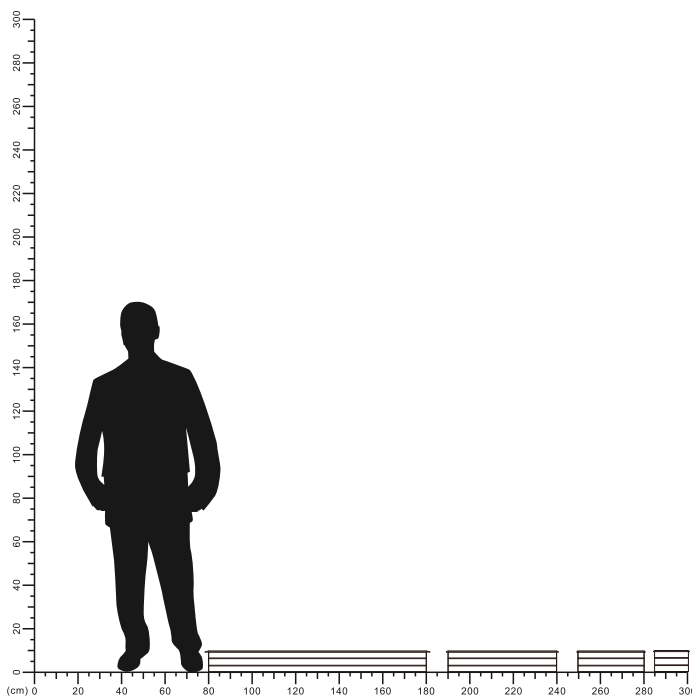


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

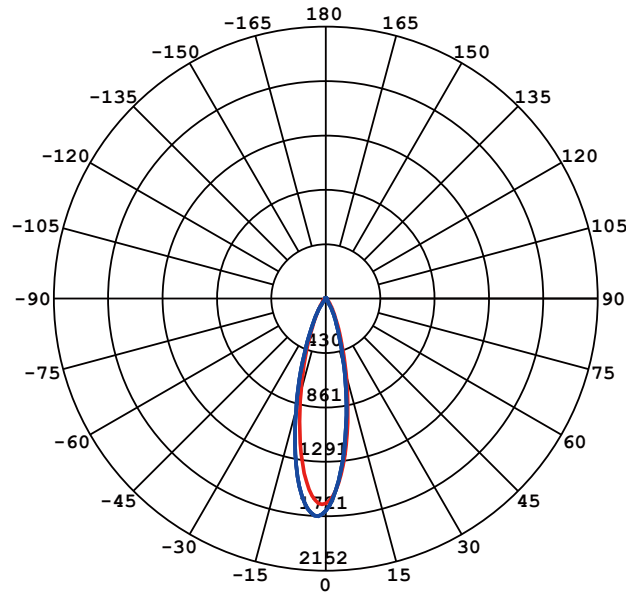


Beam Angle (50%) C0-180, C90-270: 26.5 deg, 26.5 deg

C0-180 — C90-270 —


Illuminance at a Distance

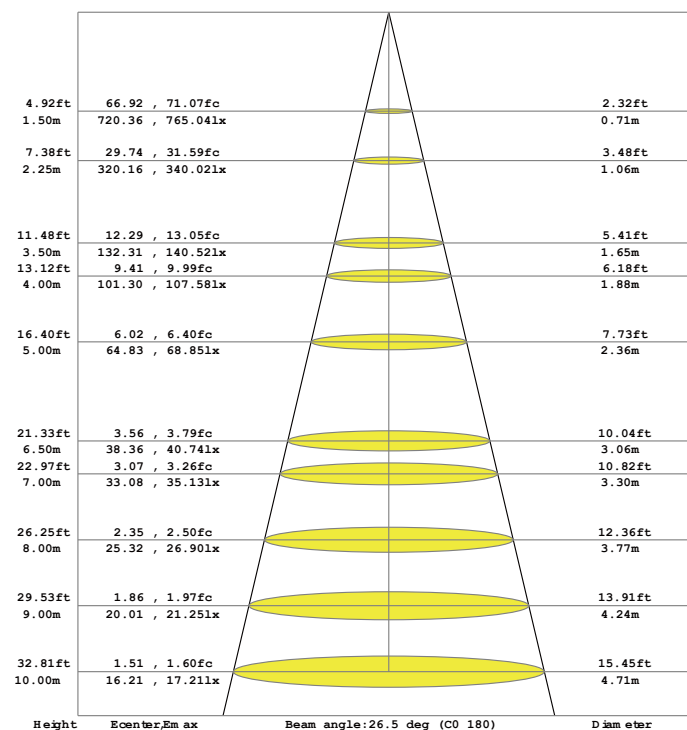


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

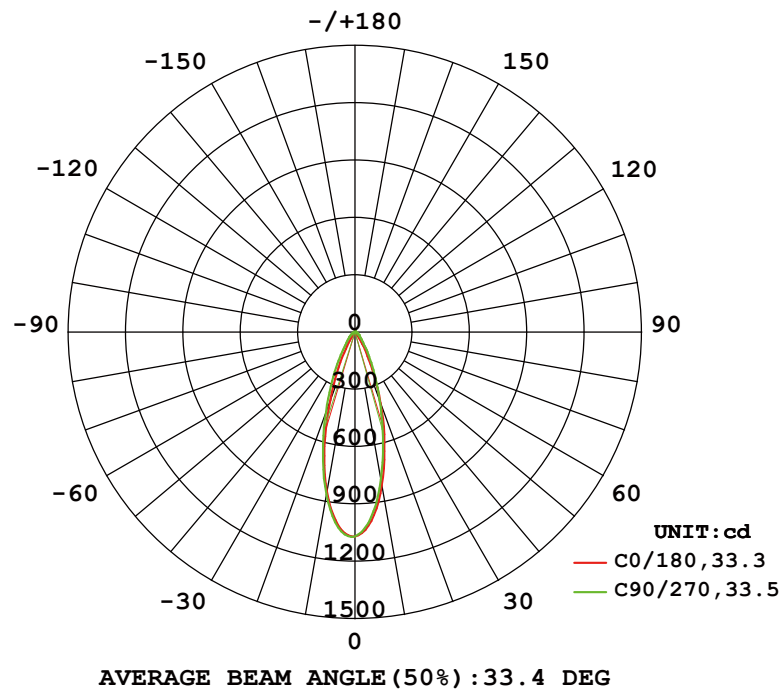


Illuminance at a Distance

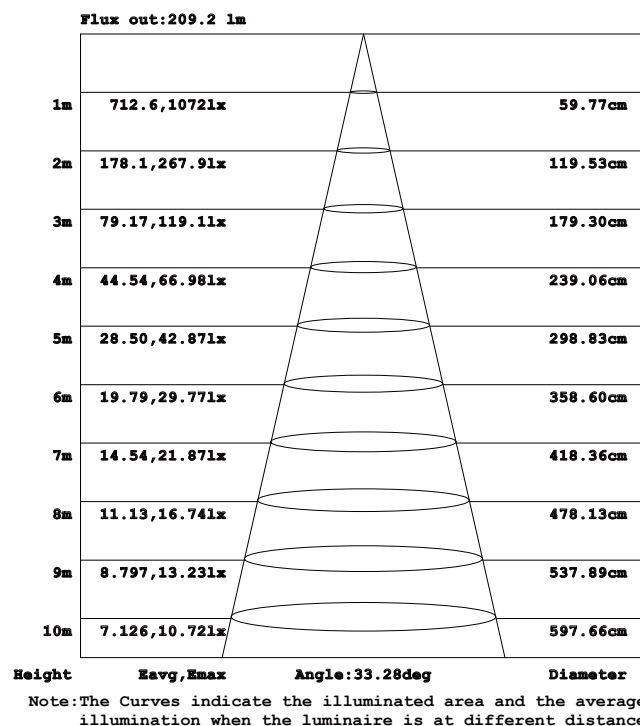


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

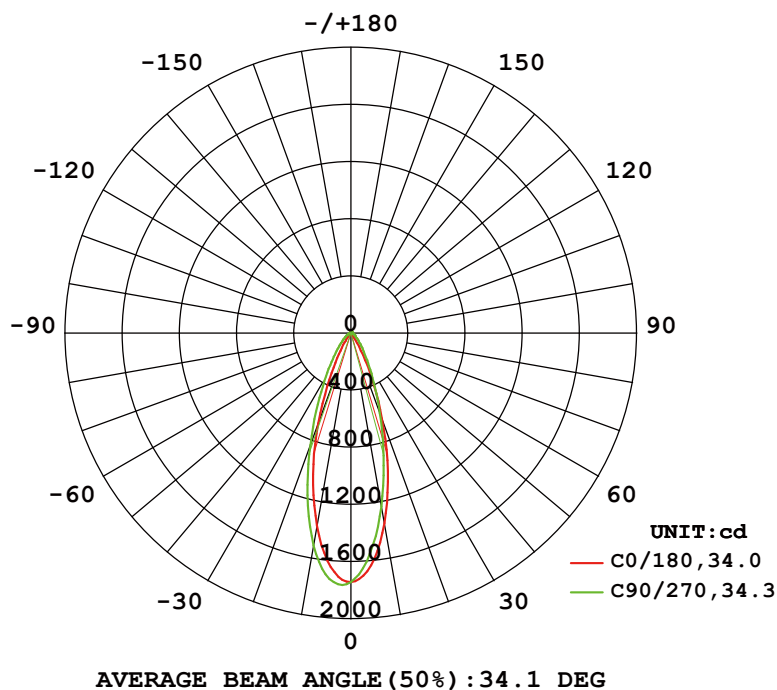


Illuminance at a Distance

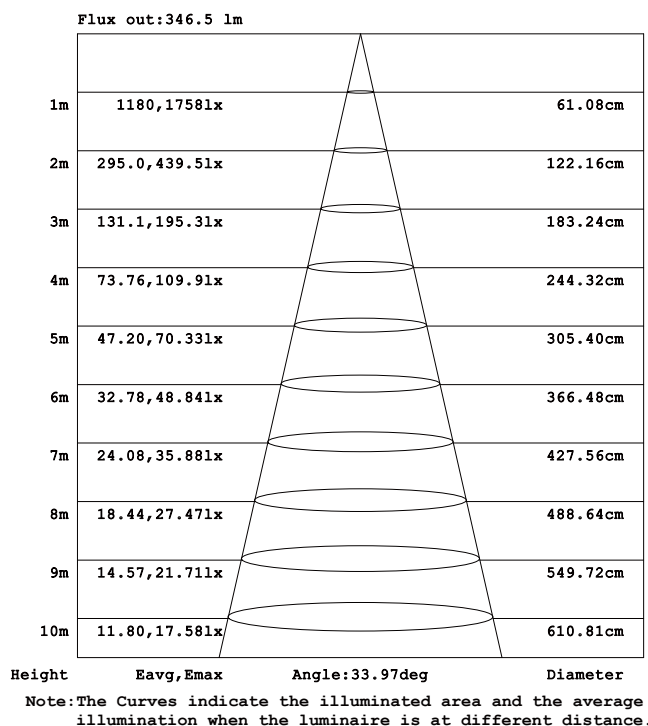


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

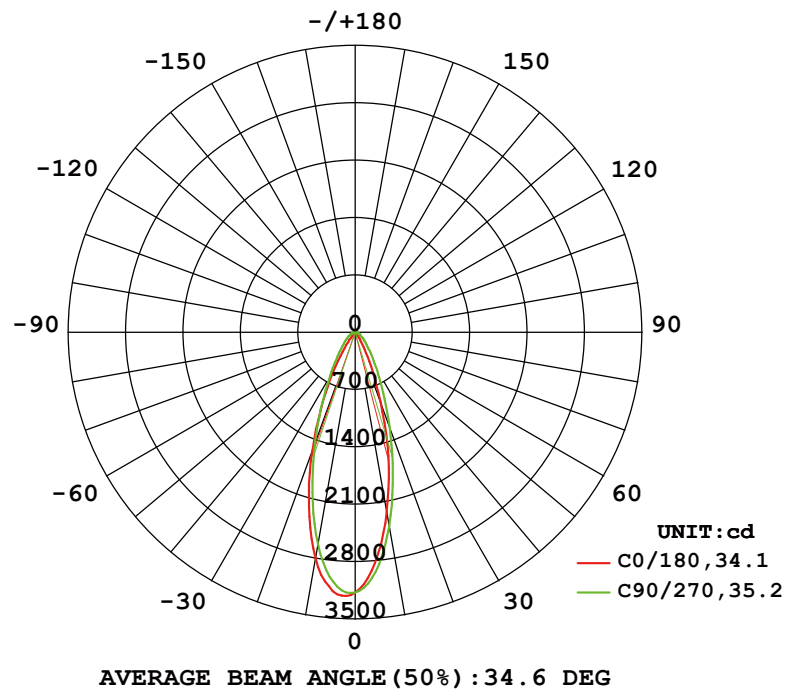

Illuminance at a Distance

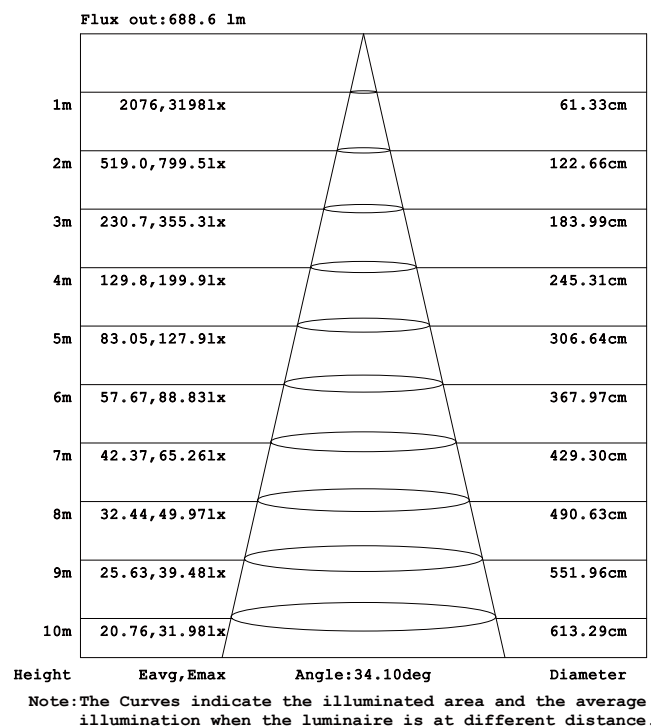


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

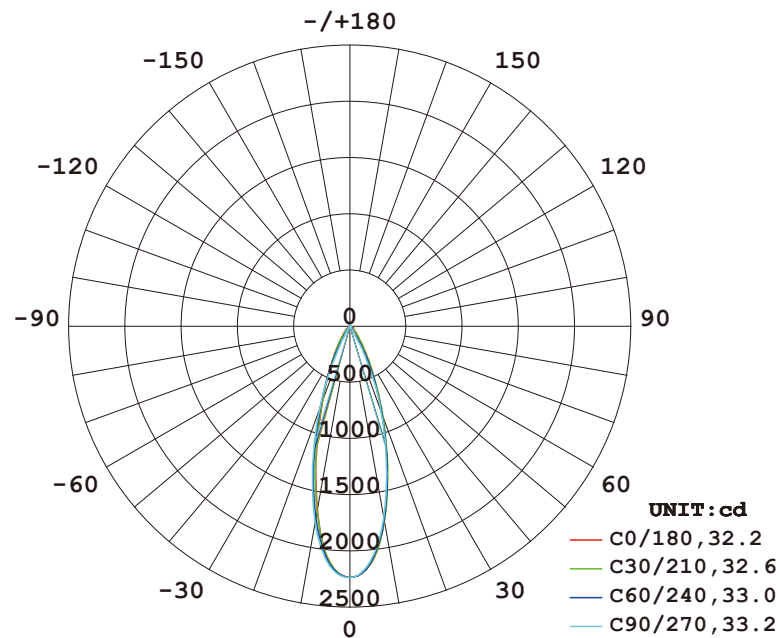


AVERAGE BEAM ANGLE (50%) : 32.8 DEG


Illuminance at a Distance

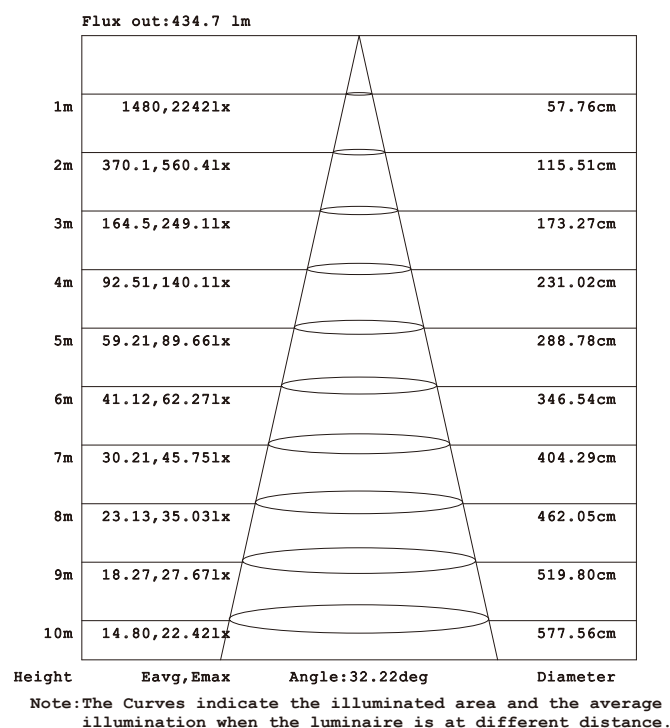


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

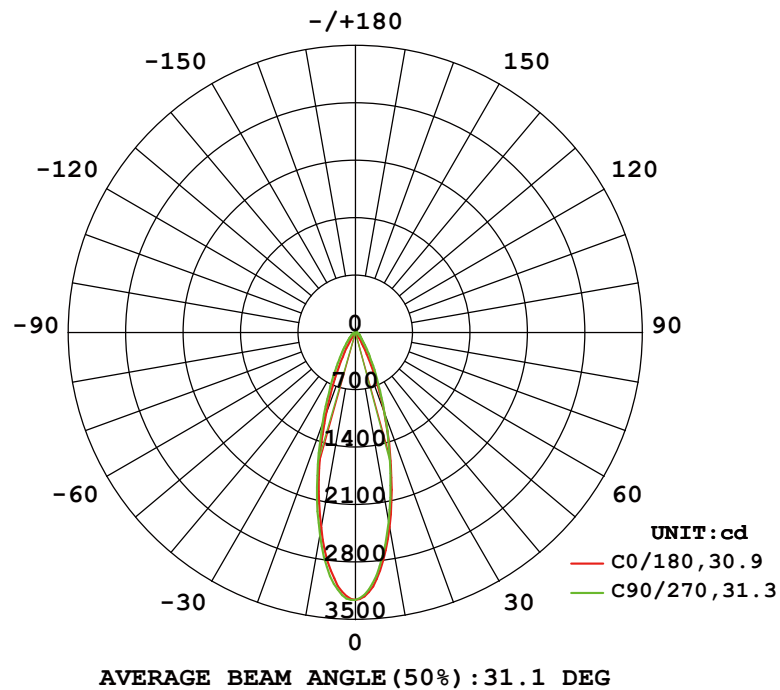

Illuminance at a Distance

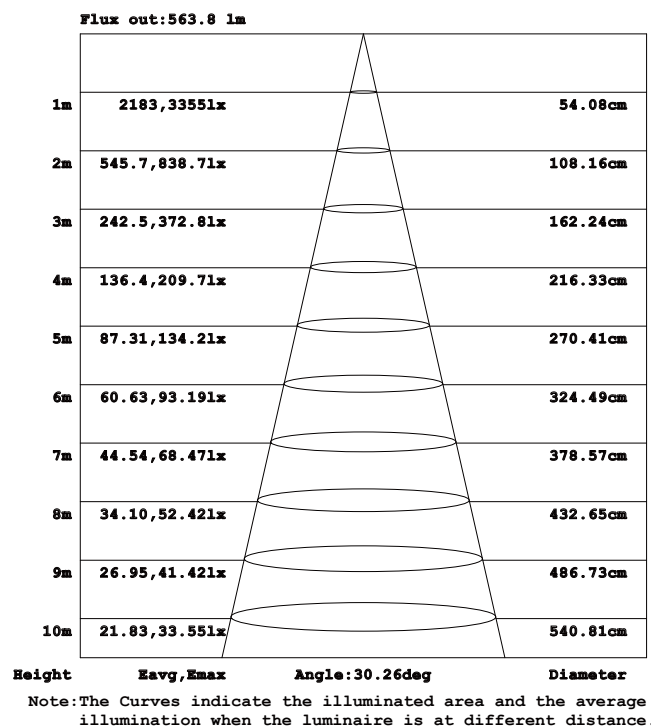


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

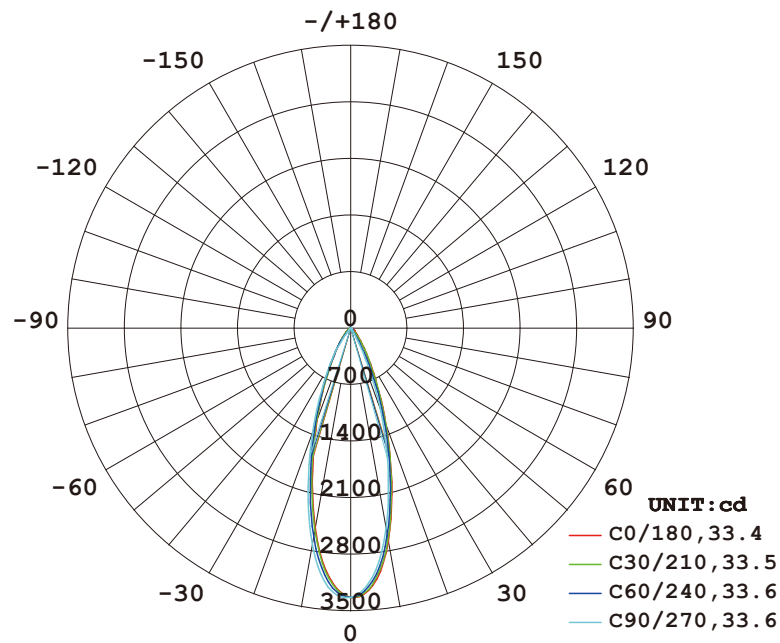

AVERAGE BEAM ANGLE (50%) : 33.5 DEG



Illuminance at a Distance

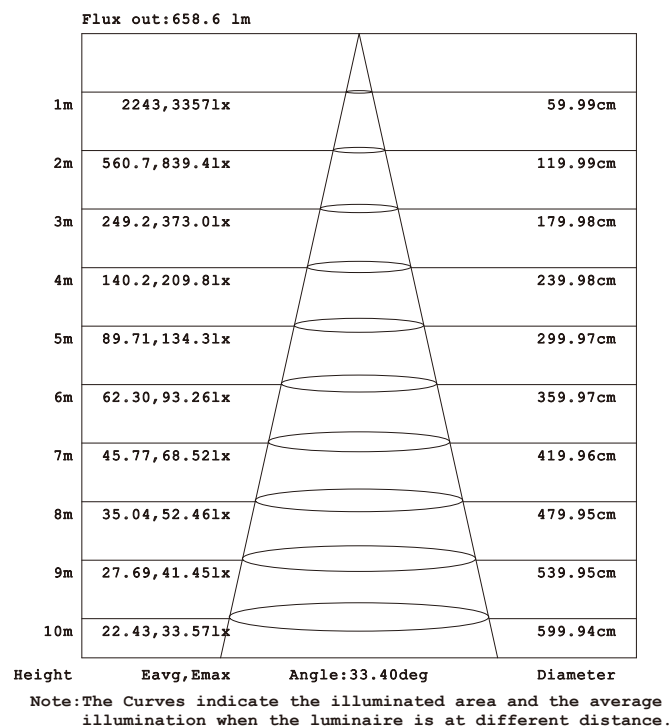



1

Turn off The Power

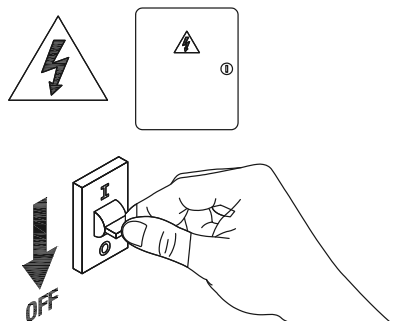


2

Turn off the power and dug a hole

3

Connect the cable

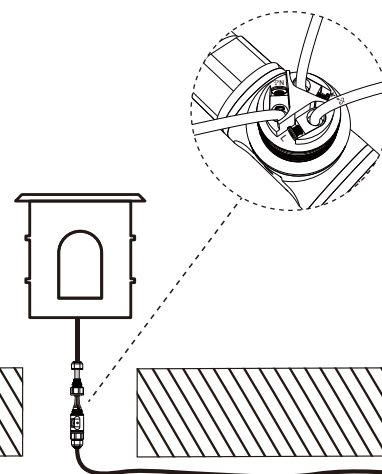

4

Installation completed

5

Turn on the power

