




Lamp Accessories



NRP-BD7005-T5-B Series
IP65

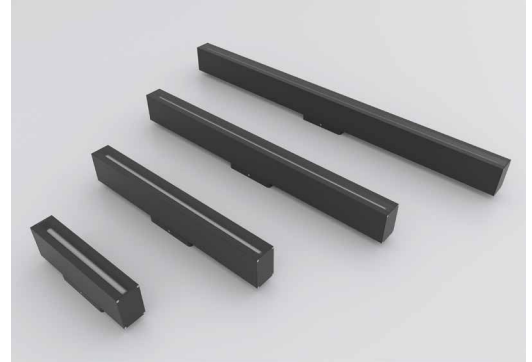

Item Code	Socket	Dimensions in mm			
		A	B	C	
NRP-BD7005-T5-B-300	T5	350	120	60	0.9
NRP-BD7005-T5-B-600	T5	650	120	60	1.8
NRP-BD7005-T5-B-900	T5	950	120	60	2.1
NRP-BD7005-T5-B-1200	T5	1250	120	60	2.8

Dimensions in mm

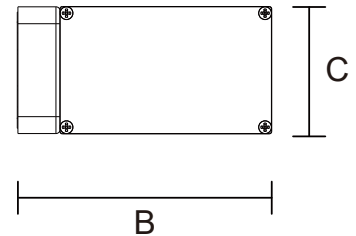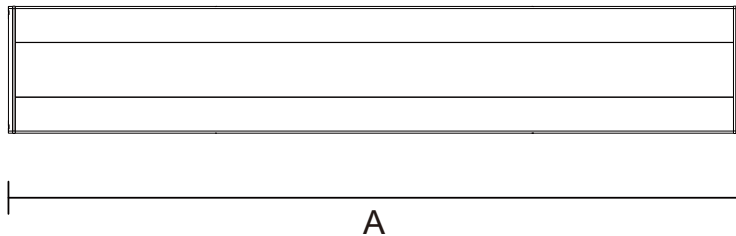

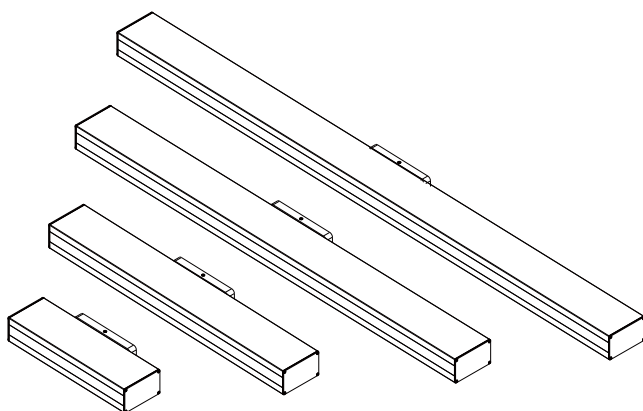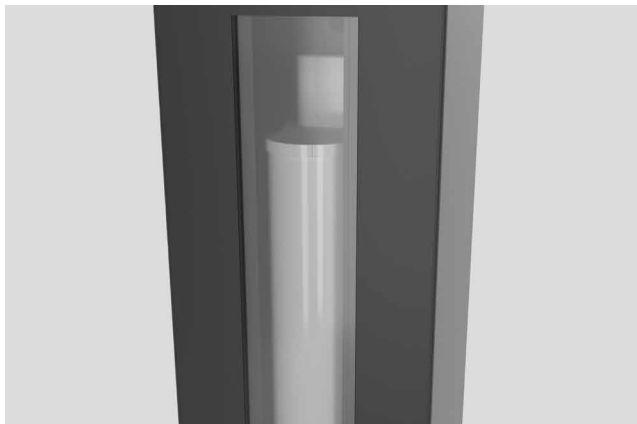

Description:
LAMP ACCESSORIES



Main material:
Aluminum+Glass

Specification

1. Fashionable simplicity: Classic modernist design, simple and generous lamp body, suitable for various decoration styles.
2. Texture material: Adopt high-quality materials, the surface is processed by special technology, which has texture and is easy to clean.
3. Multiple lights: Unique design concept, multiple light effects to choose from, both beautiful and practical.
4. Easy installation: The lamp holder adopts a user-friendly installation design, which is convenient, quick, time-saving and labor-saving.

Applications



. Park . Square . Tourist attraction . Corridor

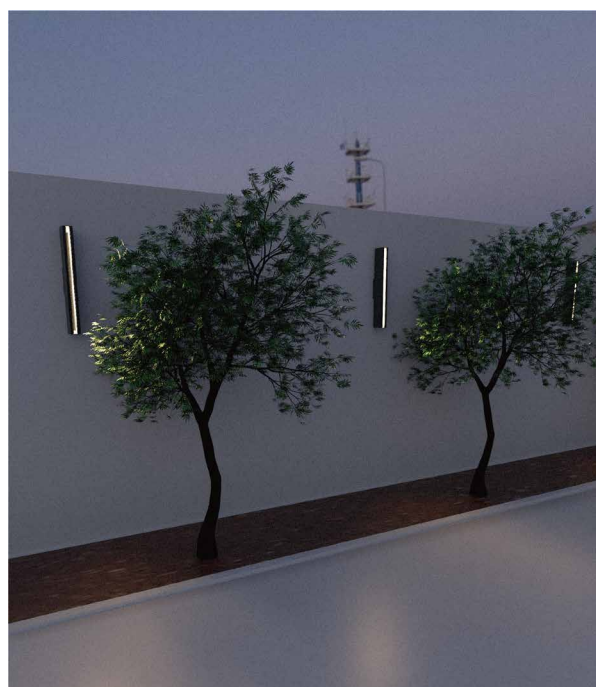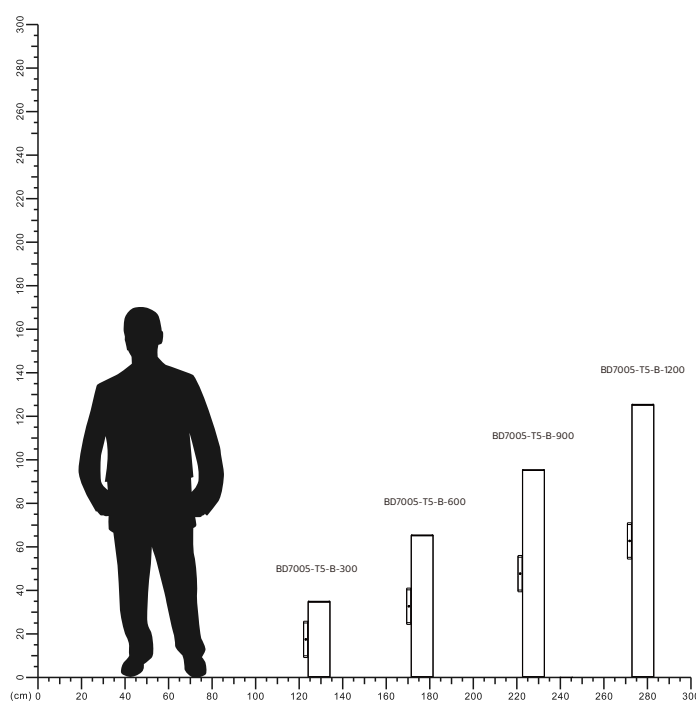

T5 LED Line Light


NRP-T5 Series


IP20



Item Code	P(W)	Displacement Factor	CCT(K)	Output (lm)	lm/w	Dimensions in mm			kg
A	B	C							
NRP-T5-30-4-2700K	4	≥0.4	2700	296	74	300	21	35	0.05
NRP-T5-30-4-3000K	4	≥0.4	3000	312	78	300	21	35	0.05
NRP-T5-60-7	7	≥0.7	2700/3000	616	88	600	21	35	0.1
NRP-T5-90-12-2700K	12	≥0.7	2700	1200	100	900	21	35	0.15
NRP-T5-90-12-3000K	12	≥0.7	3000	1280	106.7	900	21	35	0.15
NRP-T5-120-16	16	≥0.7	2700/3000	1616	101	1200	21	35	0.2

Dimensions in mm

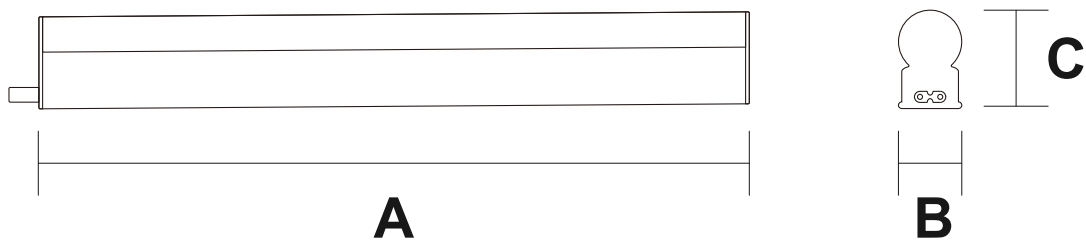




Description:
T5 LED Line Light


Main material:
PC

Specification:
Energy saving, upto 85% energy saving comparing to standard halogen and incandescent lamps Long life, upto 50,000 hours
High quality light, high color rendering, less heat, no UV or IR radiation


Applications
Shoping mall
Office buildings
Exhibition hall

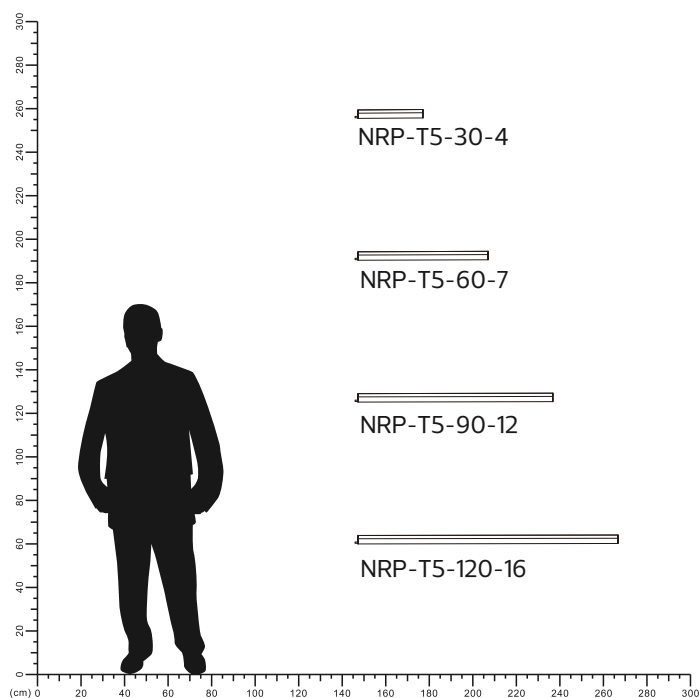

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

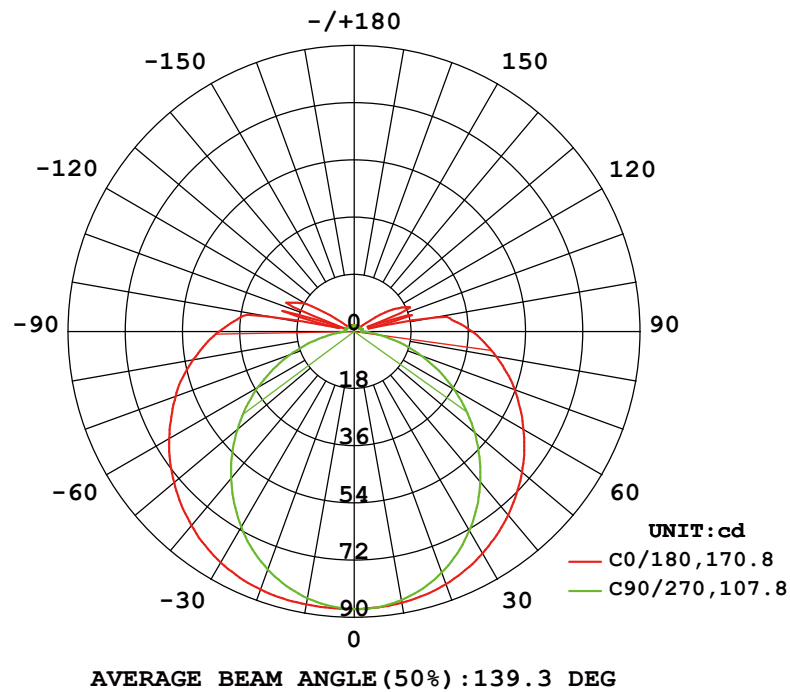


Illuminance at a Distance

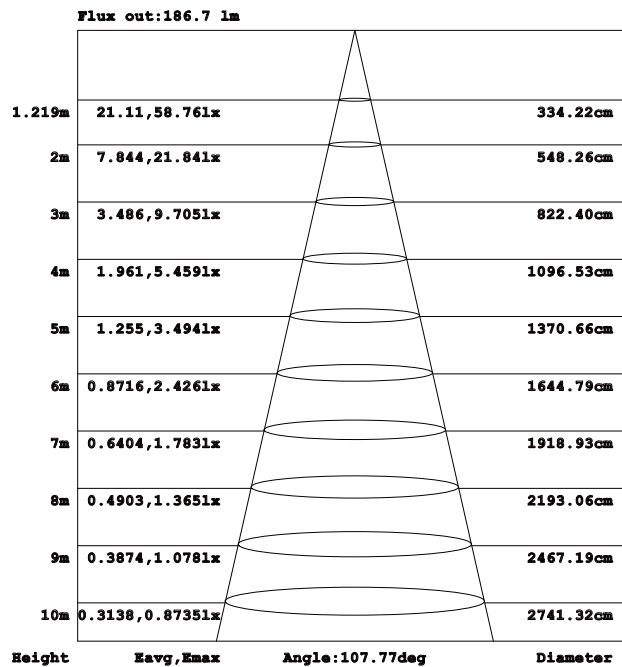


Item Code: NRP-T5-30-4

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

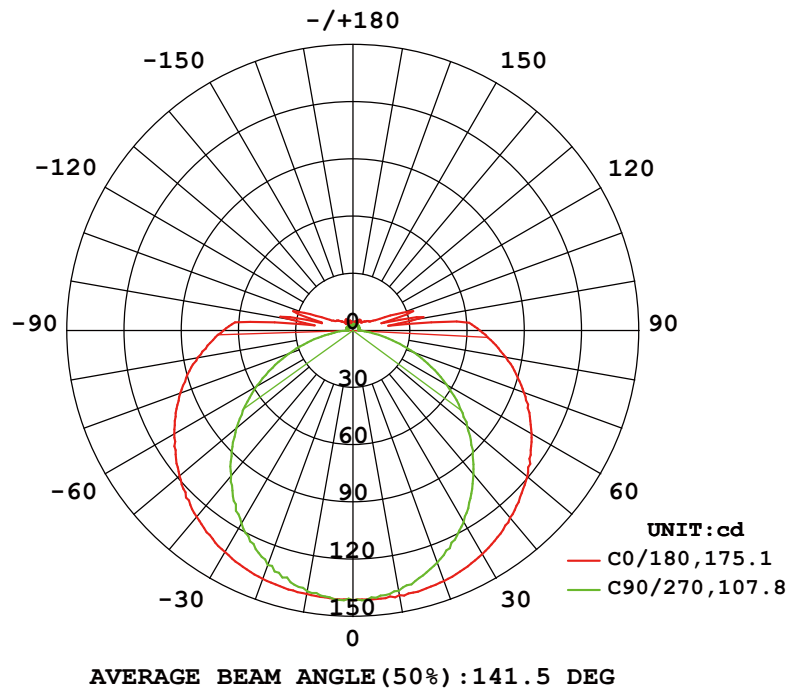


Illuminance at a Distance

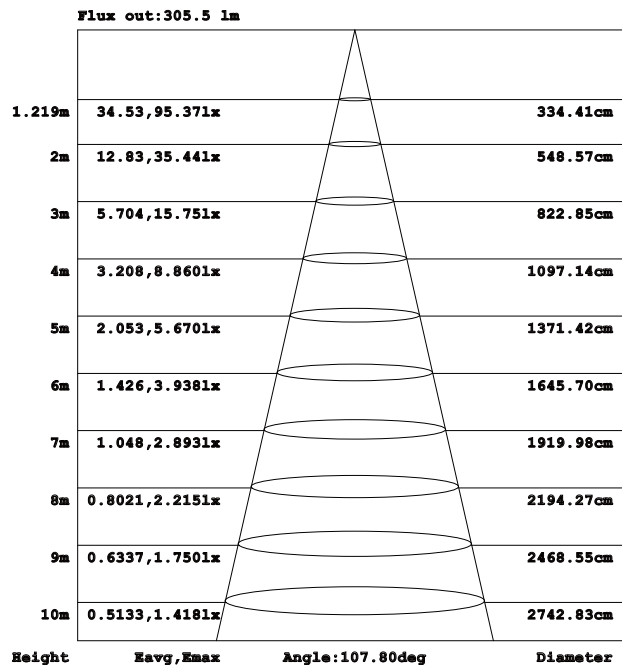


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code: NRP-T5-60-7

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

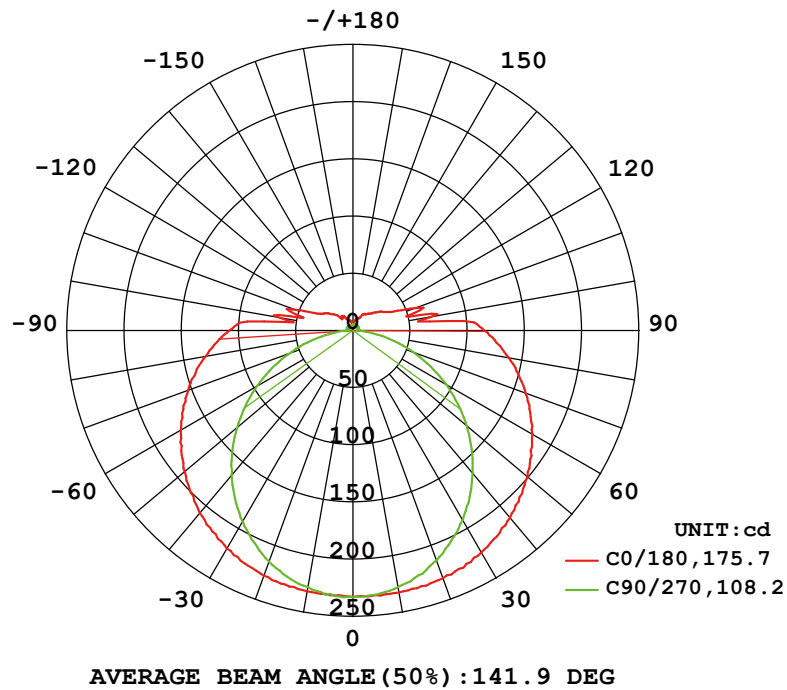


Illuminance at a Distance

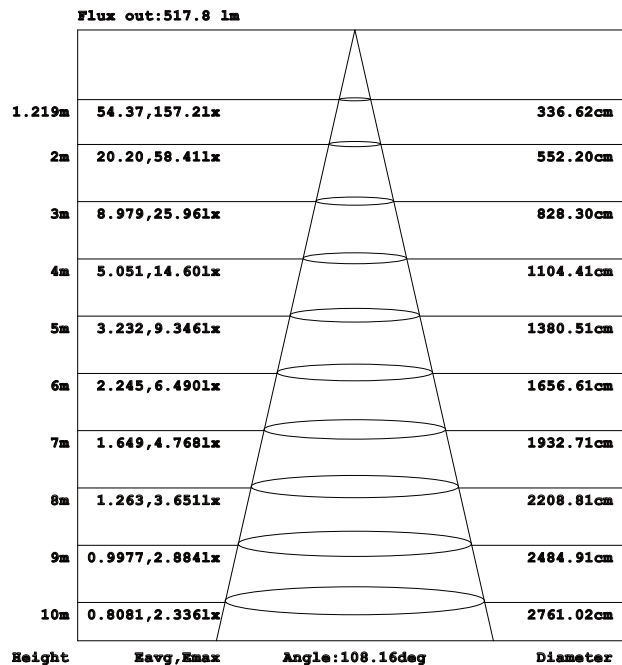


Item Code: NRP-T5-90-12

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


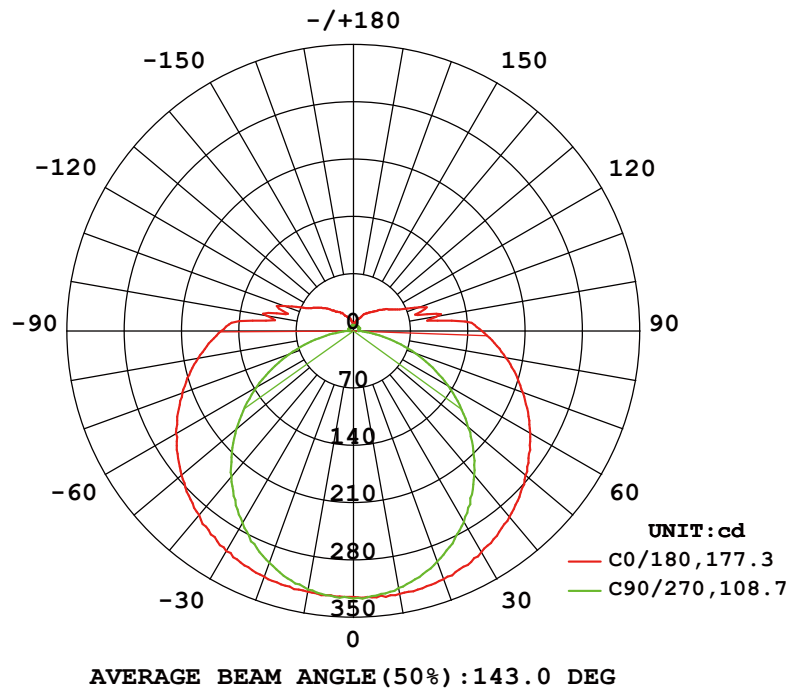


Illuminance at a Distance

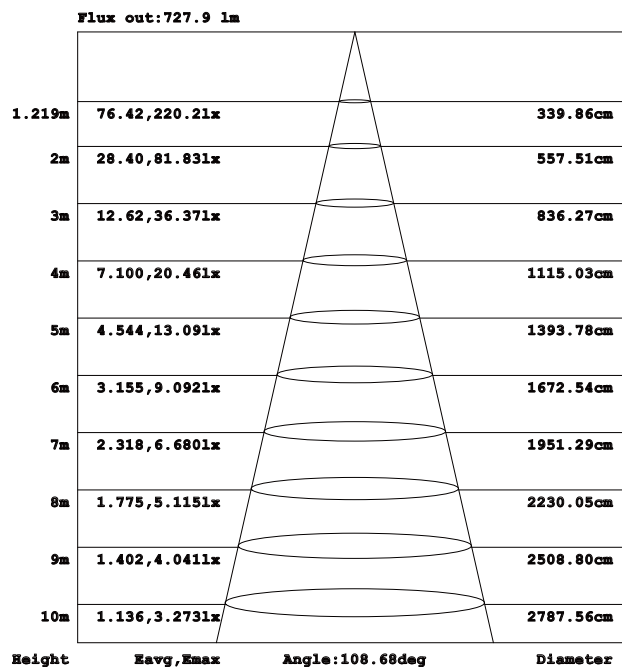


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code: NRP-T5-120-16

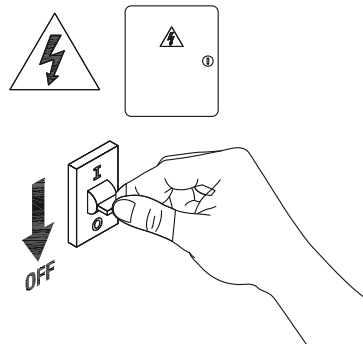


1

Turn off The Power

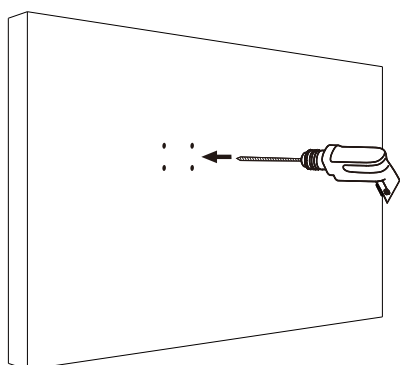


2

Drill Four holes on your wall

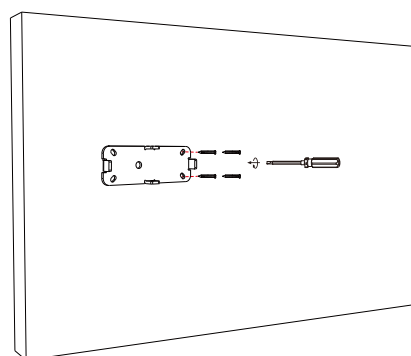


3

Mounting plate

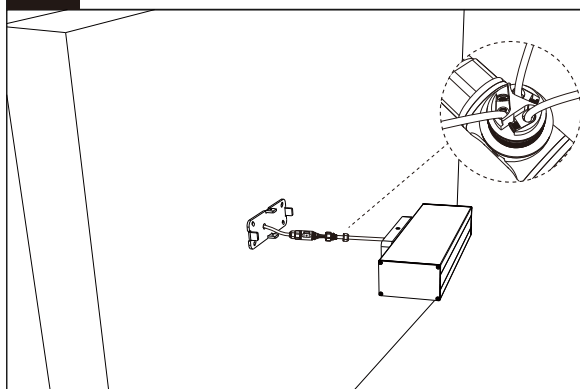


4

Connecting cable

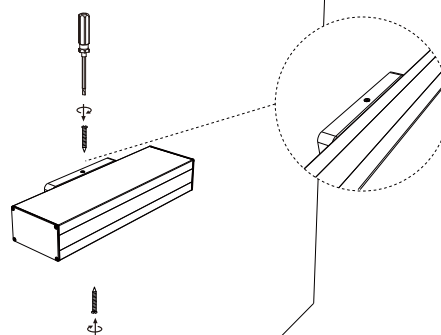


5

Install the lamp body on the bottom plate

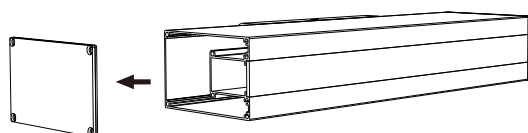

6

Remove top cover

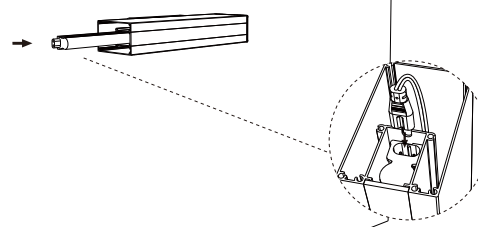

7

Install the T5 tube and plug it in

