

GU10 LED Lamp

NRP-DIMC-7 Series


IP20



Indoor	AC 220-240V	50/60 Hz	CCT 2700K 3000K 4000K 6500K	Ra ≥95	Cap Type GU10	Lamp Type MR16		Beam Angel 60°	Chips COB	
--------	----------------	-------------	---	-----------	------------------	-------------------	--	-------------------	--------------	--


Model No	P (W)	CCT	Total Lumen	lm/w	PF	Color	Dimensions in mm A B		kg
NRP-DIMC-7 SW	7	2700K	665lm	95lm/w	>0.5	Black	Φ50	67	0.1
NRP-DIMC-7 WW	7	3000K	700lm	100lm/w	>0.5	Black	Φ50	67	0.1
NRP-DIMC-7 DW	7	4000K	735lm	105lm/w	>0.5	Black	Φ50	67	0.1
NRP-DIMC-7	7	6500K	770lm	110lm/w	>0.5	Black	Φ50	67	0.1

Dimensions in mm

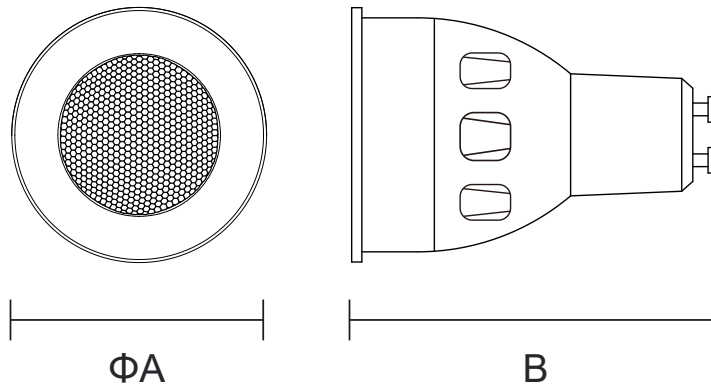

Accessories

Picture	Model No	Material	Beam angle	Size in mm	
	NRP-GU10-7-LENS-24D	PC	24°	Ø35*12	0.01
	NRP-GU10-7-LENS-36D	PC	36°	Ø35*12	0.01
	NRP-GU10-7-LENS-60D	PC	60°	Ø35*12	0.01

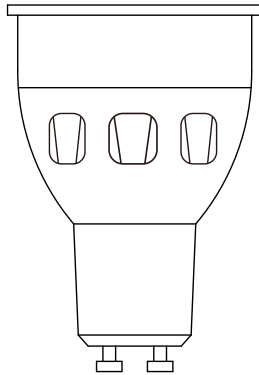


Description:
GU10 LED Lamp


Main material:
Aluminum +PC

Specification
Energy saving, up to 85% energy saving
comparing to standard halogen and incandescent
lamps
High quality light, high color rendering, less heat,
no UV or IR radiation
IP20

Applications
.Shopping mall
.Hotels
.Exhibition hall
.Art hall
.Museums

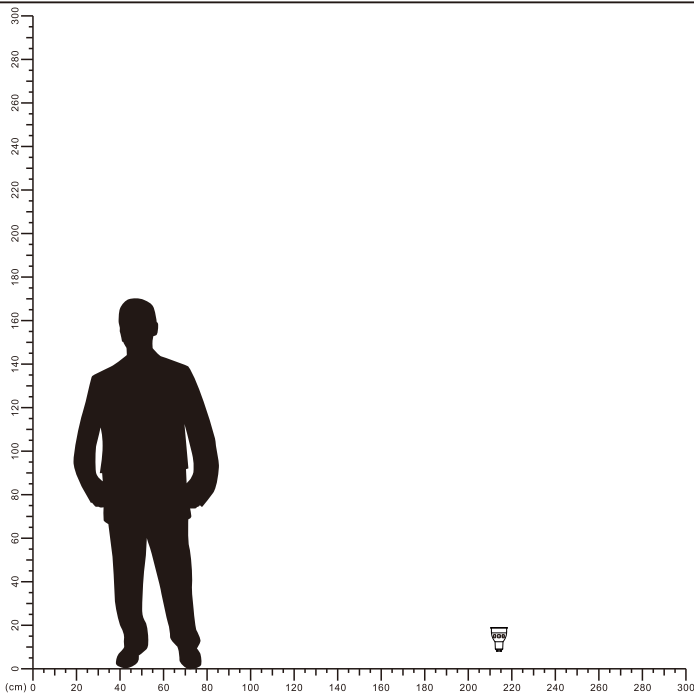


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

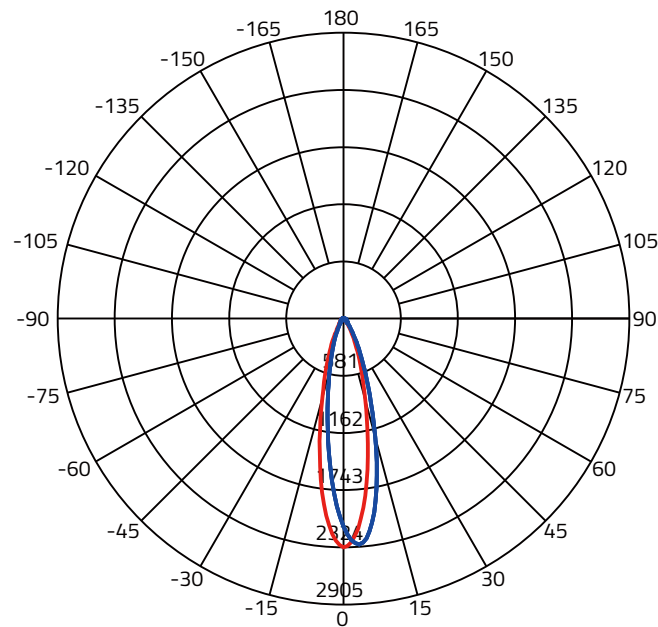


Beam Angle(50%) C0-180,C90-270: 24.0 deg,23.7 deg

C0-180 — C90-270 —

Illuminance at a Distance

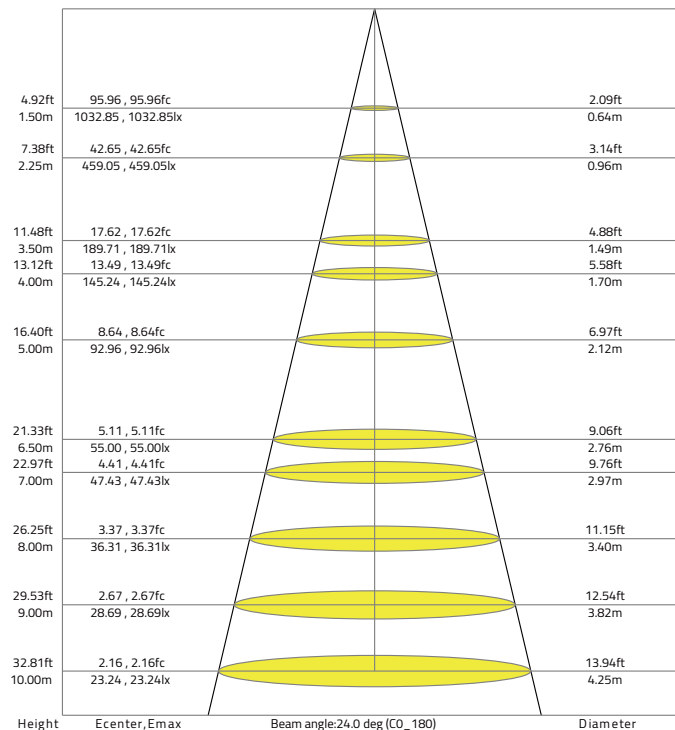


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

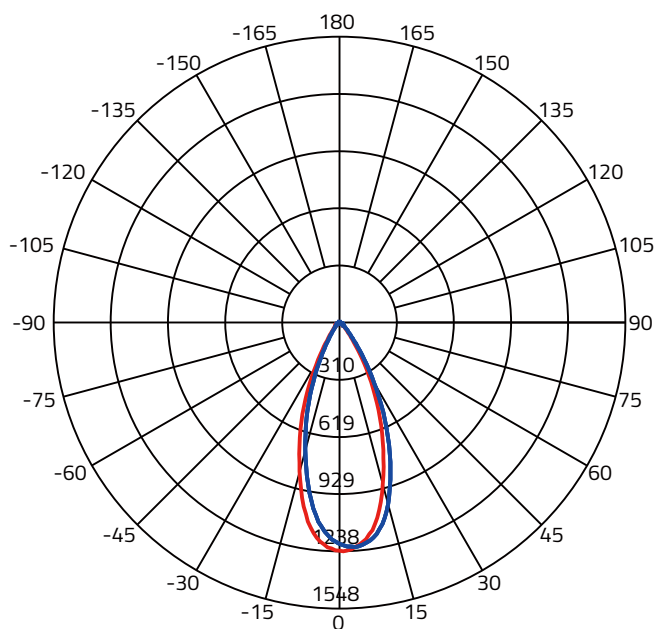


Beam Angle(50%) C0-180,C90-270: 41.5 deg,41.9 deg

C0-180 ——— C90-270 ———

Illuminance at a Distance

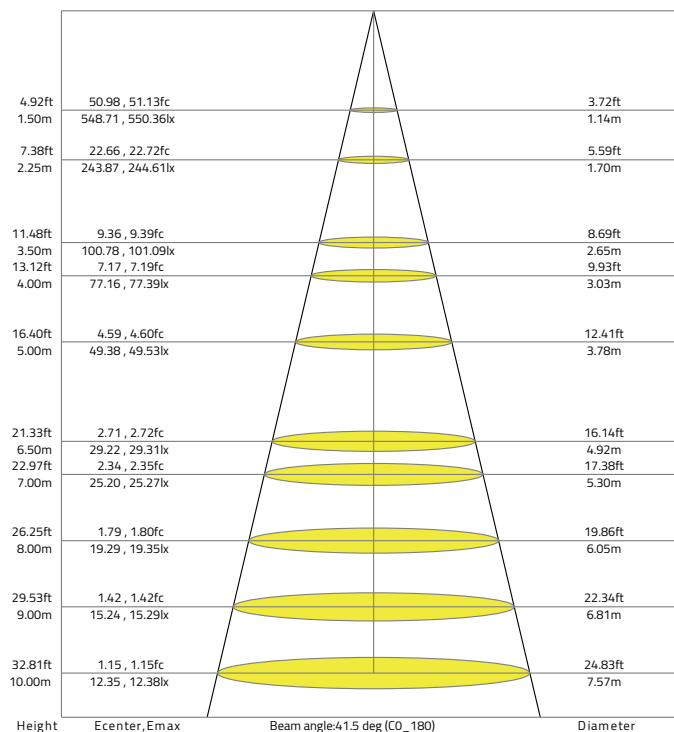


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

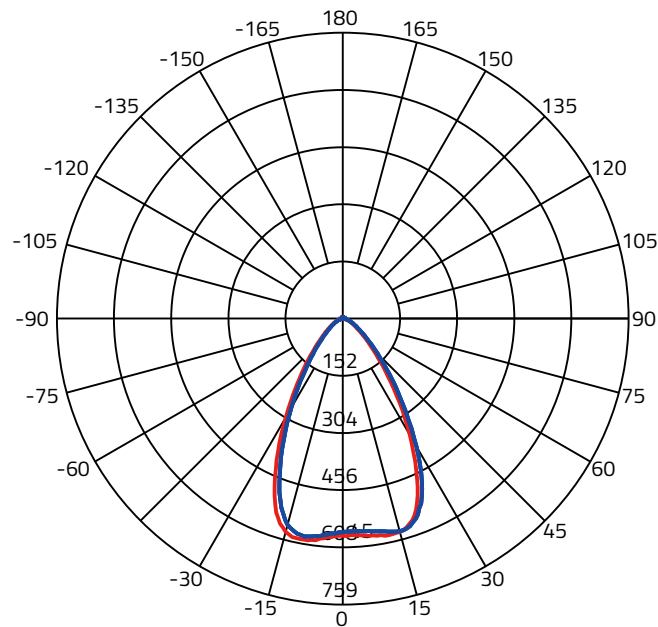


Beam Angle(50%) C0-180,C90-270: 62.9 deg,63.3 deg

C0-180 — C90-270 —


Illuminance at a Distance

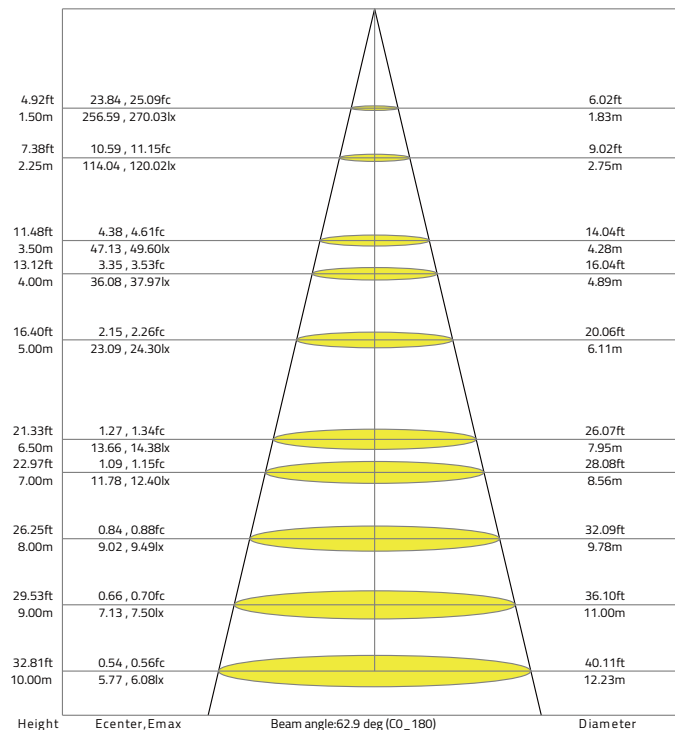

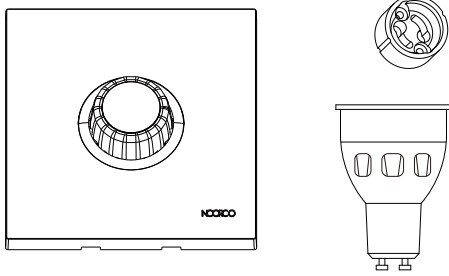


1

Turn off The Power

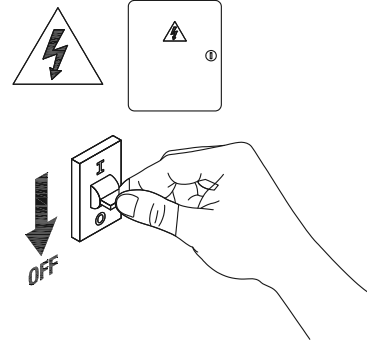


2

Punch a hole in the wall and ceiling

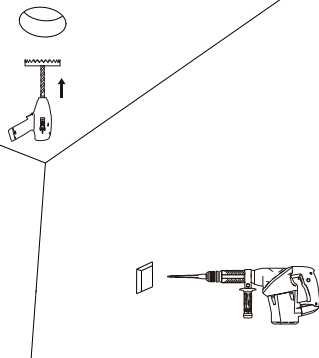


3

Install the GU10 light source into the lamp housing

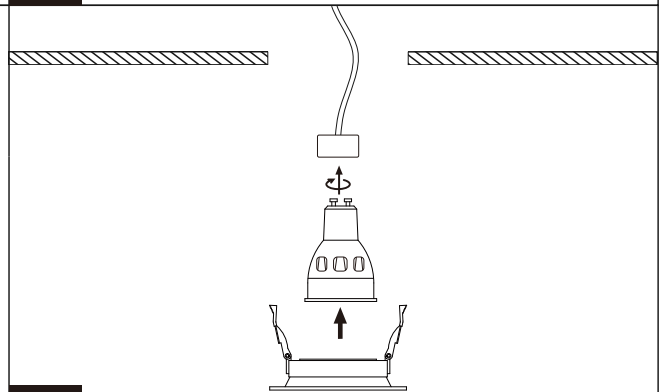


4

The downlight is installed

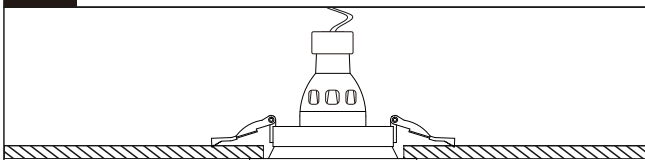


5

The dimming panel is connected to the luminaire cable

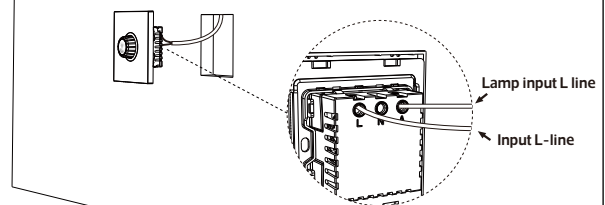

6

Turn on the power



7

The rotating dimmer controls the light level

