



LED FREE DOT SYSTEM


NRP-FCL Series

IP20




Model No	P (W)	CCT	Beam Angle	Total Lumen	Chips	Dimensions in mm			
						A	B	C	
NRP-FCL0601-4-30K-BK-24D	4	3000K	24°	200	COB	Φ85	82	1000	0.23
NRP-FCL0651-6-30K-BK-120D	6	3000K	120°	540	SMD	Φ100	Φ100	1000	0.52



Dimensions in mm

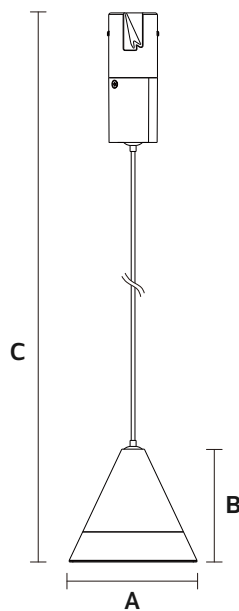

NRP-FCL0601-4-30K-BK-24D

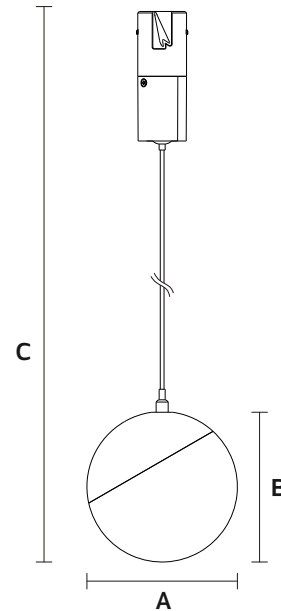

NRP-FCL0651-6-30K-BK-120D

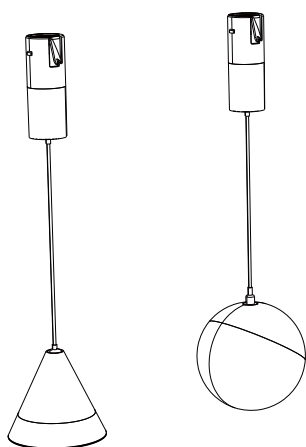
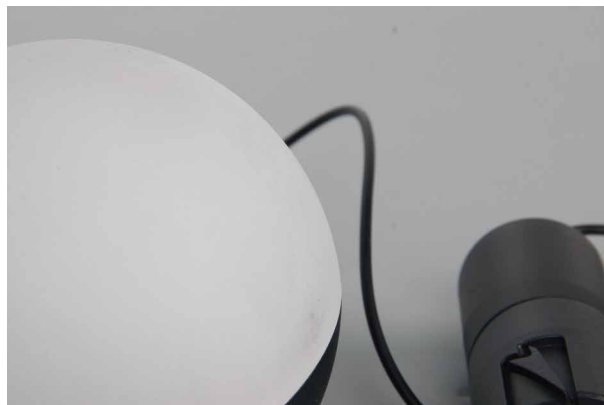


Description:
Combination Of Embedded Lamps


Main material:
Die-cast aluminum + Glass+PC

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

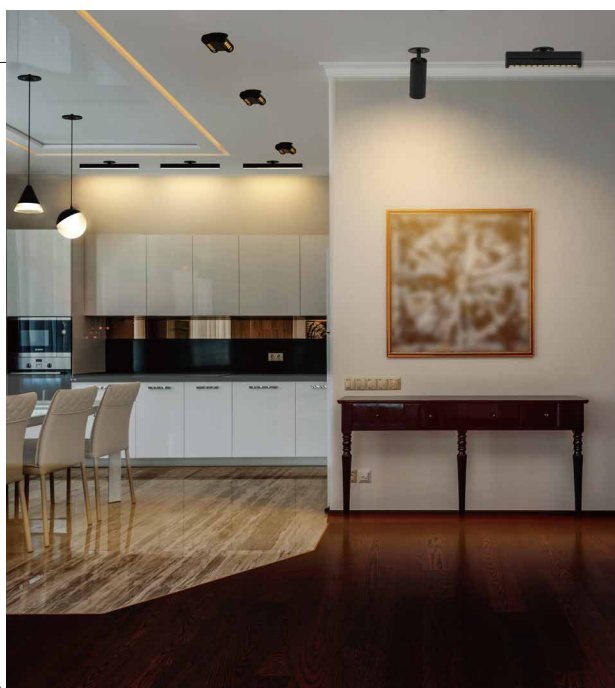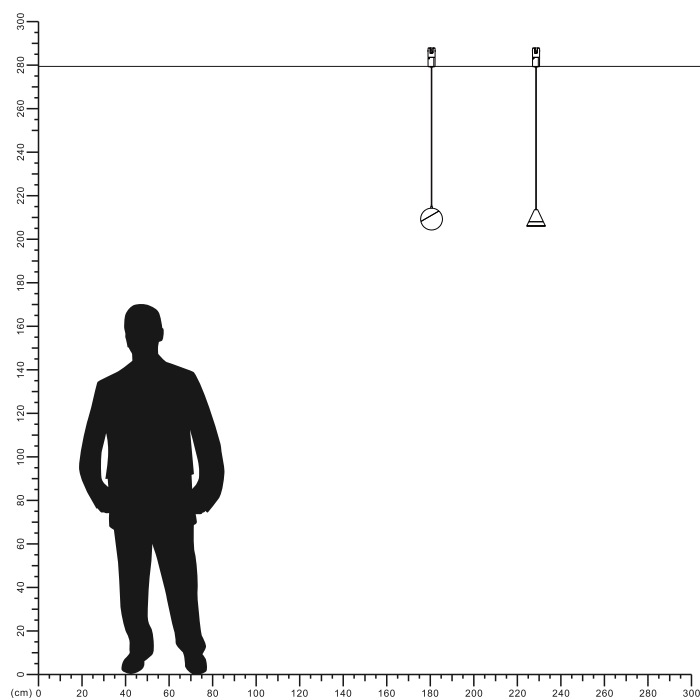


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

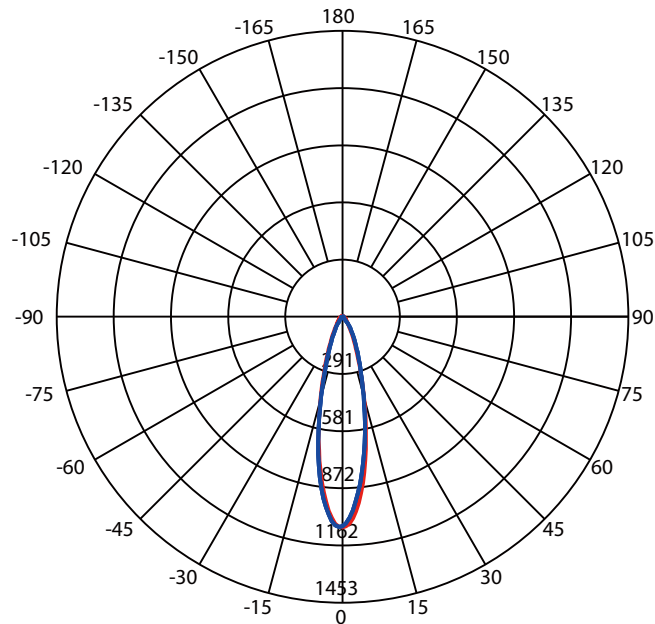


Beam Angle(50%) C0-180,C90-270: 25.5 deg,25.2 deg

C0-180 — C90-270 —

Illuminance at a Distance

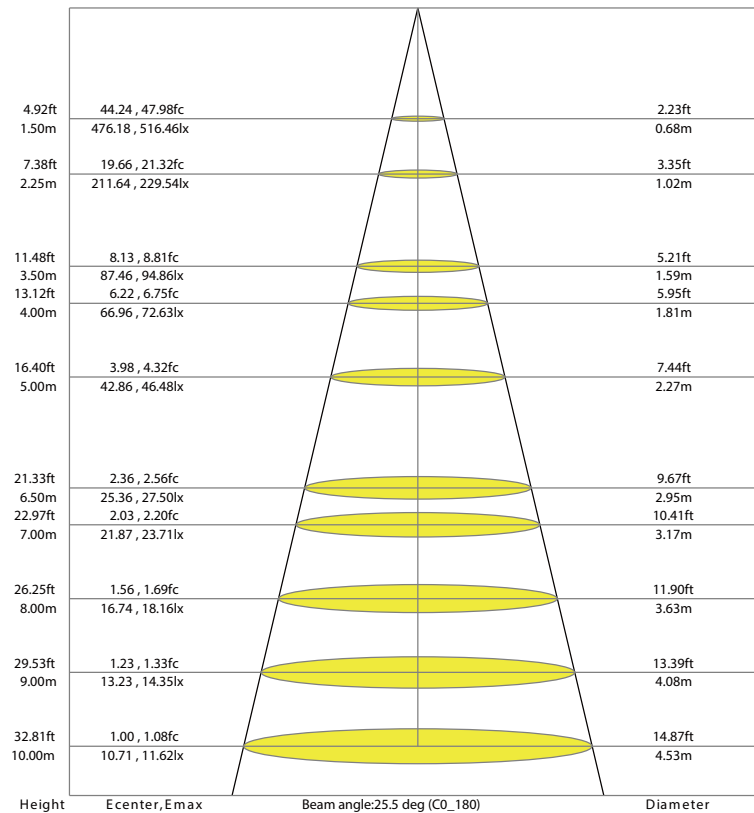


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

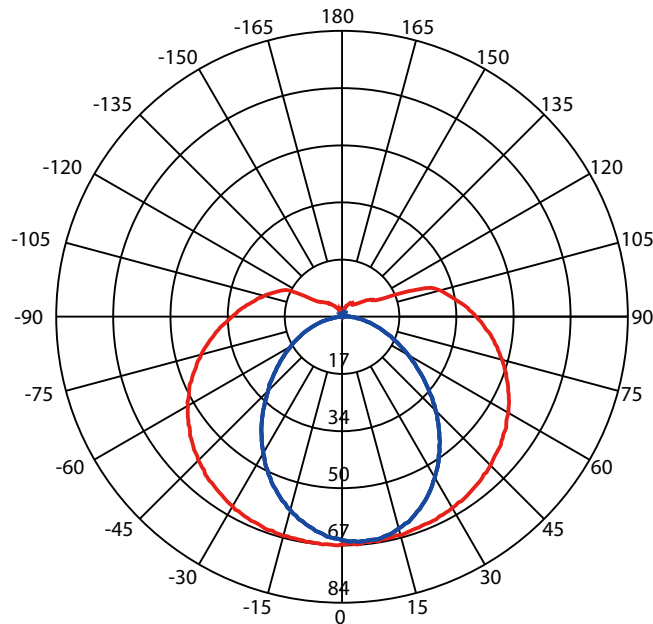

Beam Angle(50%) C0-180,C90-270: 186.9 deg,92.5 deg

C0-180 — C90-270 —

Illuminance at a Distance

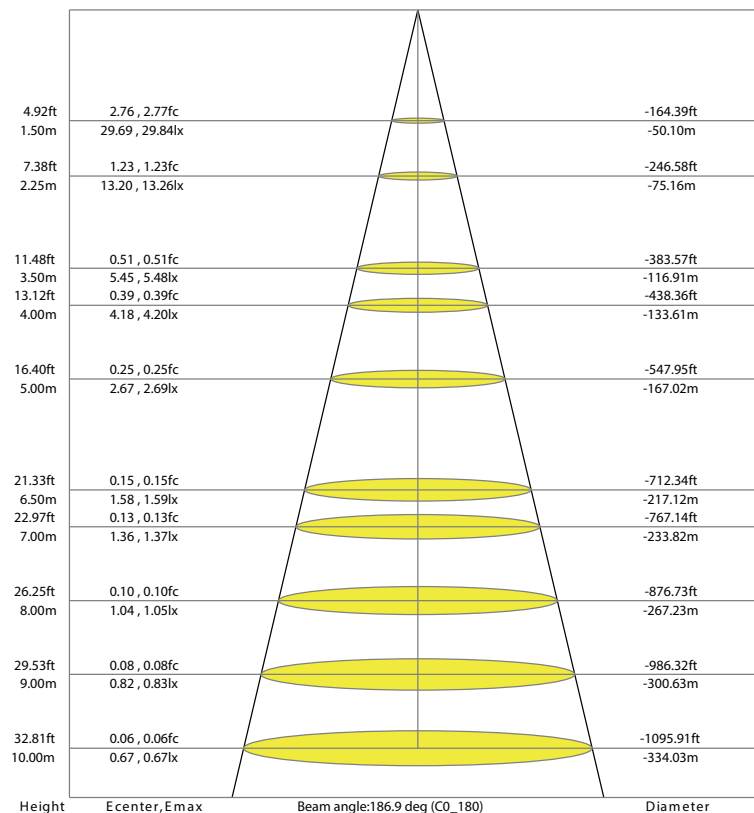

LED FREE DOT SYSTEM

NRP-FD-BASE


IP20






Item Code	Materials	Hole Size (mm)	
NRP-FD-TRM-70	Aluminum +PC	Φ50mm	0.16
NRP-FD-BASE-60	Aluminum +PC	Φ50mm	0.16

*Suitable for constant voltage DC48V power supply only

Dimensions in mm

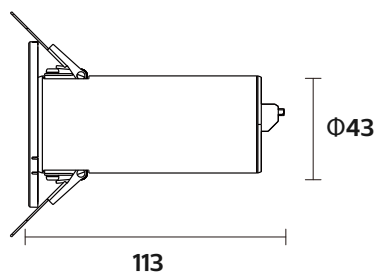

NRP-FD-TRM-70

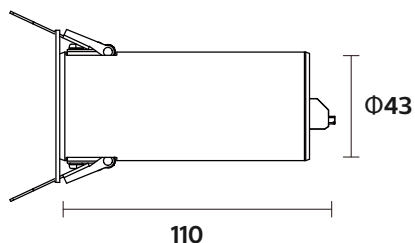

NRP-FD-BASE-60

