




## LED FREE DOT SYSTEM


NRP-FD-TB105 Series  
IP20



| Model No                   | P (W) | CCT   | Beam Angle | Total Lumen | LM/W    | Dimensions in mm |      |     | kg   |
|----------------------------|-------|-------|------------|-------------|---------|------------------|------|-----|------|
|                            |       |       |            |             |         | A                | B    | C   |      |
| NRP-FTB0851-6-30K-BK-120D  | 6W    | 3000K | 120°       | 480lm       | 80lm/w  | 300              | 32.5 | 122 | 0.23 |
| NRP-FTB0851-6-40K-BK-120D  | 6W    | 4000K | 120°       | 660lm       | 110lm/w | 300              | 32.5 | 122 | 0.23 |
| NRP-FTB0851-15-30K-BK-120D | 15W   | 3000K | 120°       | 1200lm      | 80lm/w  | 890              | 32.5 | 122 | 0.37 |
| NRP-FTB0851-15-40K-BK-120D | 15W   | 4000K | 120°       | 1875lm      | 125lm/w | 890              | 32.5 | 122 | 0.37 |

### Dimensions in mm

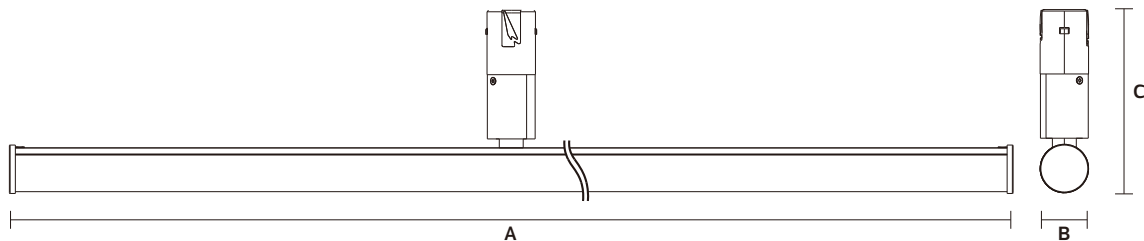

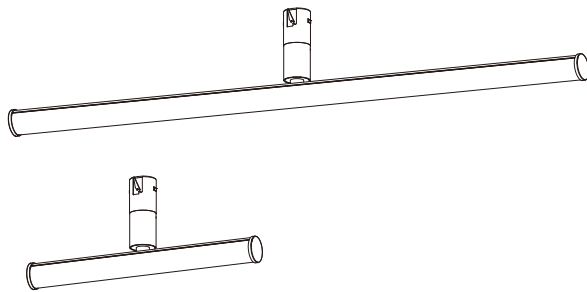


**Description:**  
LED FREE DOT SYSTEM

**Main material:**  
Aluminum + PC

**Specification:**  
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps  
High quality light, high color rendering, less heat, no UV or IR radiation  
Build-in LED Driver


**Applications**  
.Office  
.Meeting room  
.Sitting room

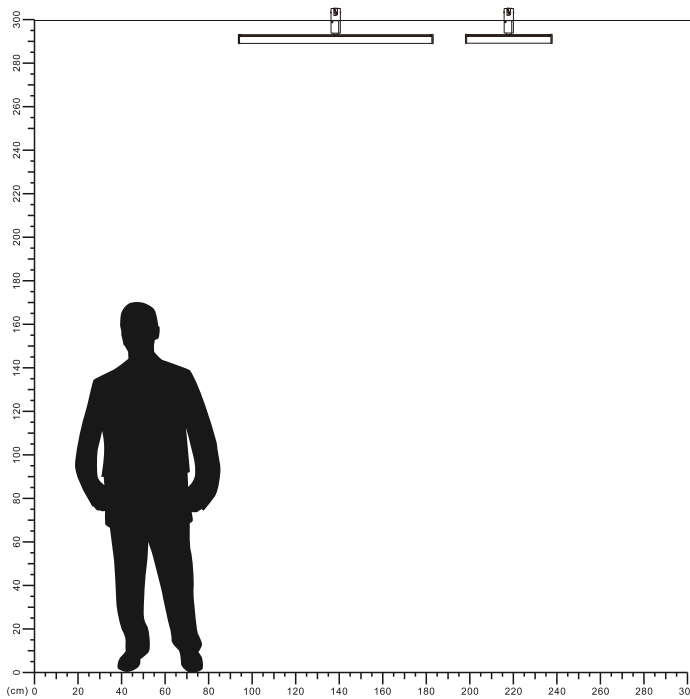

## LED FREE DOT SYSTEM

NRP-FD-BASE  
IP20



| Item Code      | Materials    | Hole Size (mm) |  |
|----------------|--------------|----------------|---|
| NRP-FD-TRM-70  | Aluminum +PC | Φ50mm          | 0.1   |
| NRP-FD-BASE-60 | Aluminum +PC | Φ50mm          | 0.1   |

\*Suitable for constant voltage DC48V power supply only

