


LED FREE DOT SYSTEM


NRP-FD-TB105 Series


IP20



Model No	P (W)	CCT	Beam Angle	Total Lumen	LM/W	Dimensions in mm			kg
						A	B	C	
NRP-FTB0851-6-30K-BK-120D	6W	3000K	120°	480lm	80lm/w	300	32.5	122	0.23
NRP-FTB0851-6-40K-BK-120D	6W	4000K	120°	660lm	110lm/w	300	32.5	122	0.23
NRP-FTB0851-15-30K-BK-120D	15W	3000K	120°	1200lm	80lm/w	890	32.5	122	0.37
NRP-FTB0851-15-40K-BK-120D	15W	4000K	120°	1875lm	125lm/w	890	32.5	122	0.37

Dimensions in mm

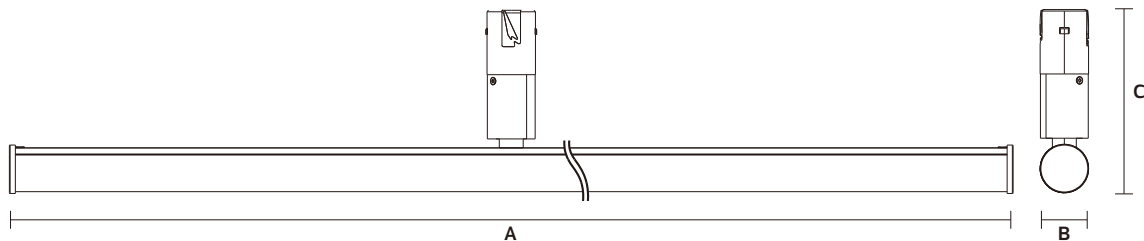

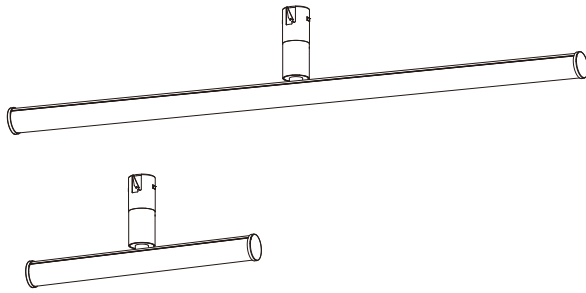


Description:
LED FREE DOT SYSTEM

Main material:
Aluminum + PC

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

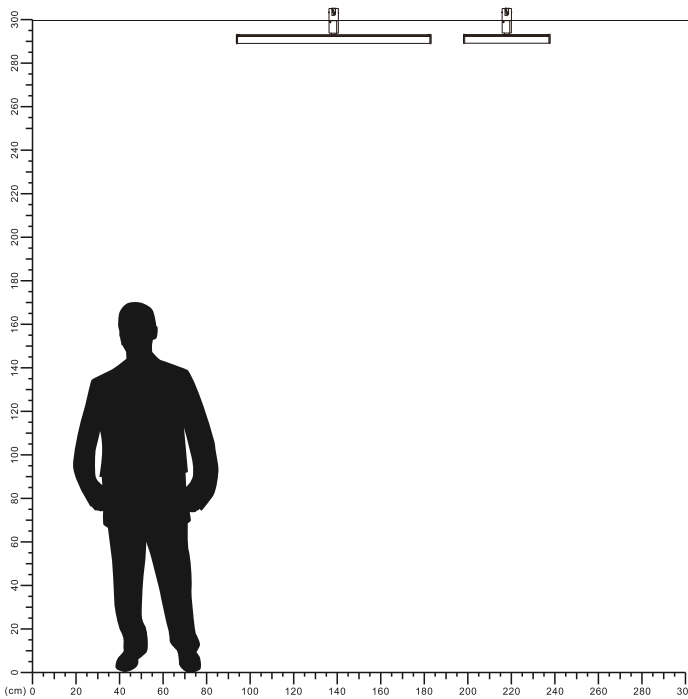

LED FREE DOT SYSTEM

NRP-FD-BASE
IP20



Item Code	Materials	Hole Size (mm)	
NRP-FD-TRM-70	Aluminum +PC	Φ50mm	0.1
NRP-FD-BASE-60	Aluminum +PC	Φ50mm	0.1
NRP-FD-TRM-90-A	Aluminum	Φ50mm	0.027
NRP-FD-TRM-90-B	Aluminum+PC	NRP-FD-TRM-90-A (Matching)	0.09

*Suitable for constant voltage DC48V power supply only

