



LED FREE DOT SYSTEM


NRP-FCL0751 Series


IP20



Model No	P (W)	CCT	Beam Angle	Total Lumen	LM/W	Dimensions in mm			
						A	B	C	
NRP-FCL0751-6-30K-BK-120D	6	3000K	120°	420	70	Φ32	300	1250	0.23
NRP-FCL0751-10-30K-BK-120D	10	3000K	120°	850	85	Φ32	600	1550	0.36

Dimensions in mm

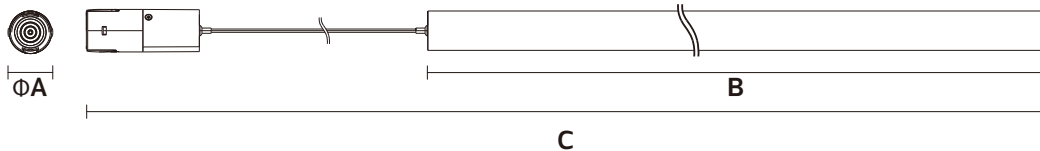

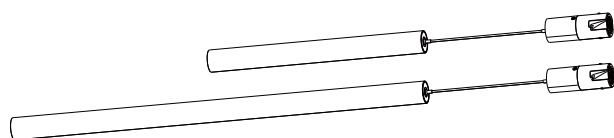


Description:
LED FREE DOT SYSTEM

Main material:
Aluminum + PC

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver


Applications
.Office
.Meeting room
.Sitting room

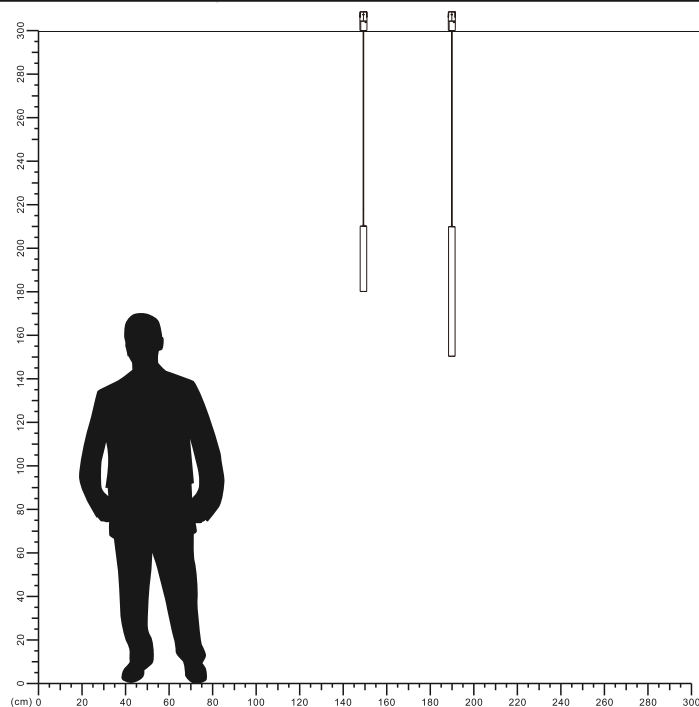

LED FREE DOT SYSTEM

NRP-FD-BASE


IP20

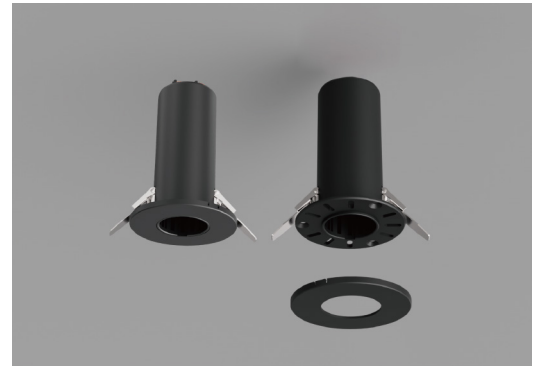




Item Code	Materials	Hole Size (mm)	
NRP-FD-TRM-70	Aluminum +PC	Φ50mm	0.16
NRP-FD-BASE-60	Aluminum +PC	Φ50mm	0.16

*Suitable for constant voltage DC48V power supply only

Dimensions in mm

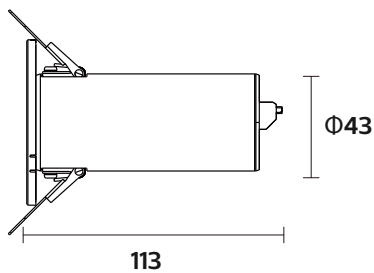

NRP-FD-TRM-70

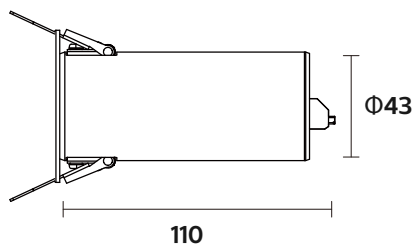

NRP-FD-BASE-60

