



LED FREE DOT SYSTEM


NRP-FFTL0901 Series
IP20



Model No	P(W)	CCT	Beam Angle	Total Lumen	Dimensions in mm			
					A	B	C	
NRP-FFTL0901-30-30K-BK-24D	30	3000K	24°	2220	881	32	950	0.38
NRP-FFTL0901-30-40K-BK-24D	30	4000K	24°	2220	881	32	950	0.38
NRP-FFTL0901-40-30K-BK-24D	40	3000K	24°	2960	1312	32	950	0.58
NRP-FFTL0901-40-40K-BK-24D	40	4000K	24°	2960	1312	32	950	0.58

Dimensions in mm




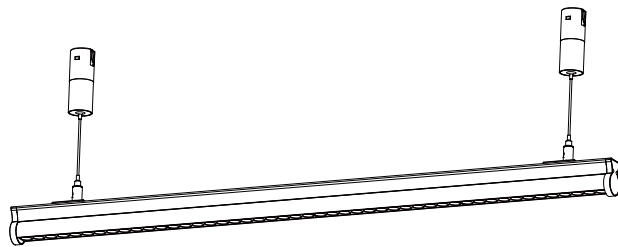


Description:
LED FREE DOT SYSTEM


Main material:
Die-cast aluminum+PC

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver


Applications
.Office
.Meeting room
.Sitting room

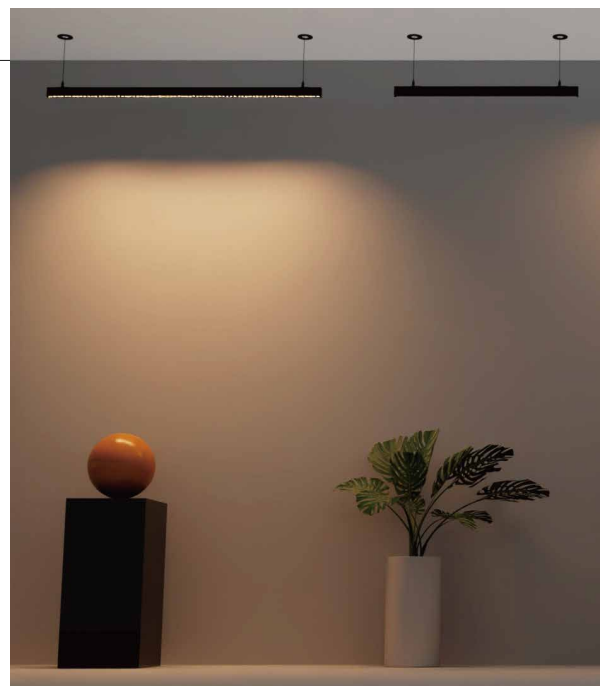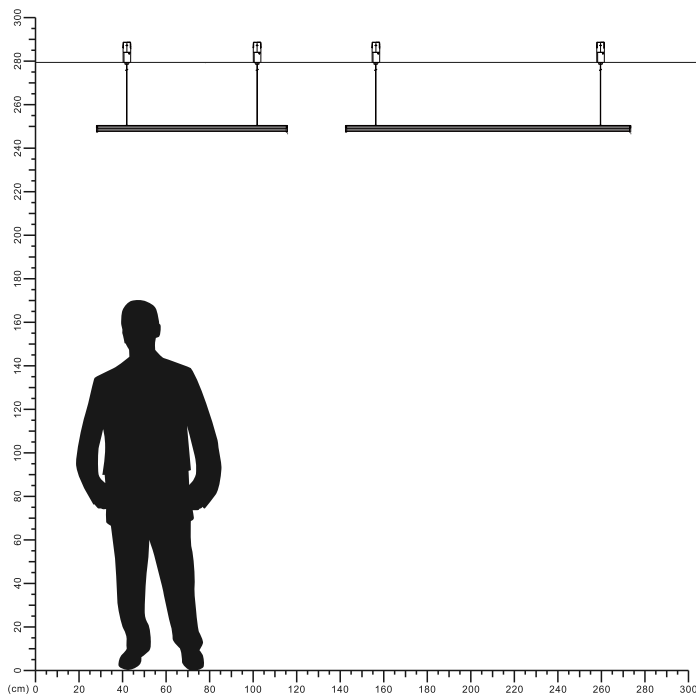


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

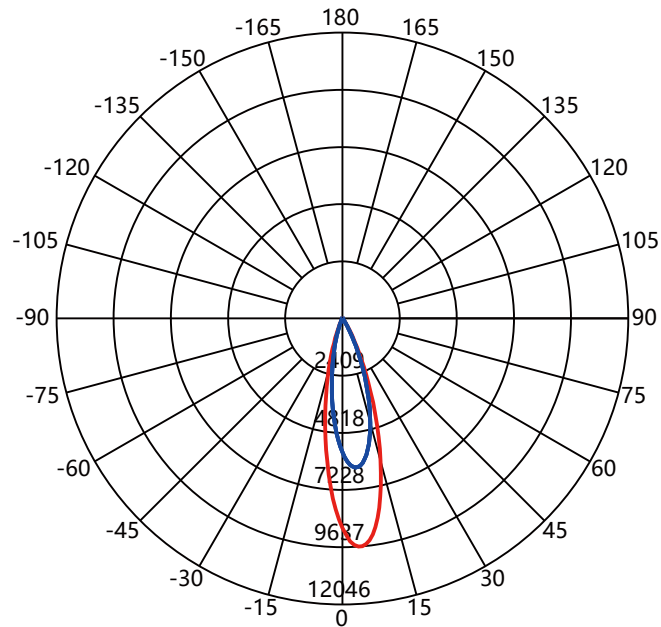

Illuminance at a Distance

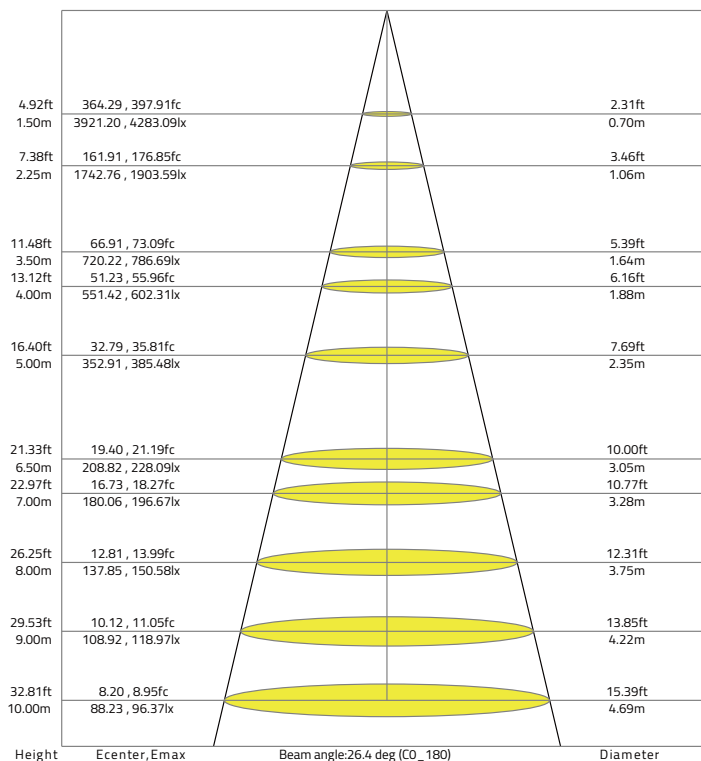


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

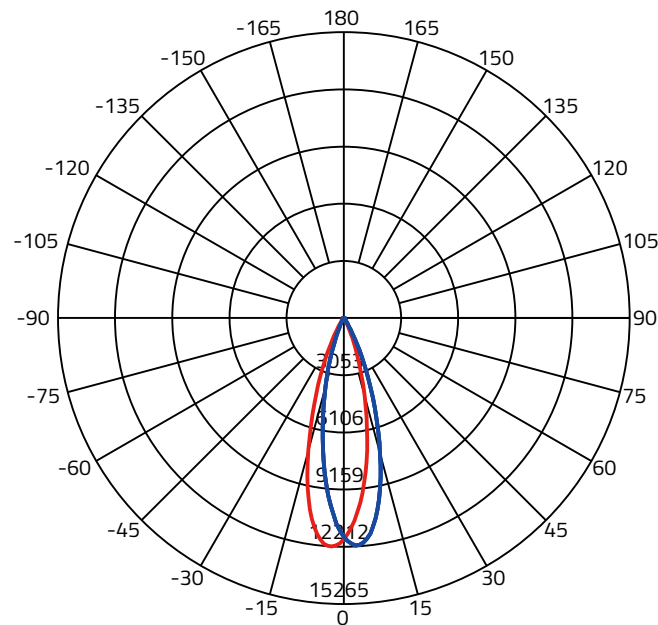

Beam Angle(50%) C0-180,C90-270: 28.7 deg,28.0 deg

C0-180 — C90-270 —

Illuminance at a Distance

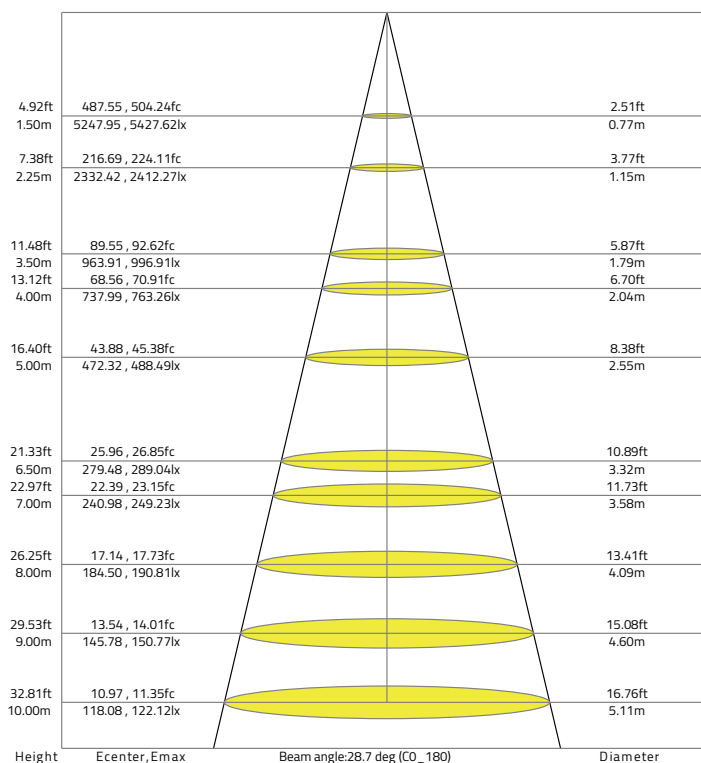

LED FREE DOT SYSTEM

NRP-FD-BASE


IP20






Item Code	Materials	Hole Size (mm)	
NRP-FD-TRM-70	Aluminum +PC	Φ50mm	0.16
NRP-FD-BASE-60	Aluminum +PC	Φ50mm	0.16

*Suitable for constant voltage DC48V power supply only

Dimensions in mm

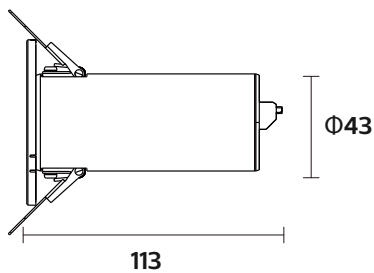

NRP-FD-TRM-70

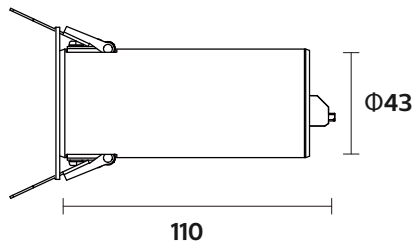

NRP-FD-BASE-60

