





LED FREE DOT SYSTEM


NRP-FLDL0851 Series
IP20

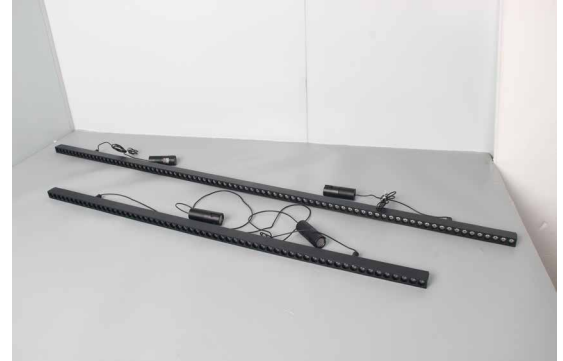

Model No	P(W)	CCT	Beam Angle	Total Lumen	Dimensions in mm			
					A	B	C	
NRP-FLDL0851-30-30K-BK-24D	30	3000K	24°	2220	1191	22.5	950	0.38
NRP-FLDL0851-40-30K-BK-24D	40	4000K	24°	2960	1514	22.5	950	0.61

Dimensions in mm

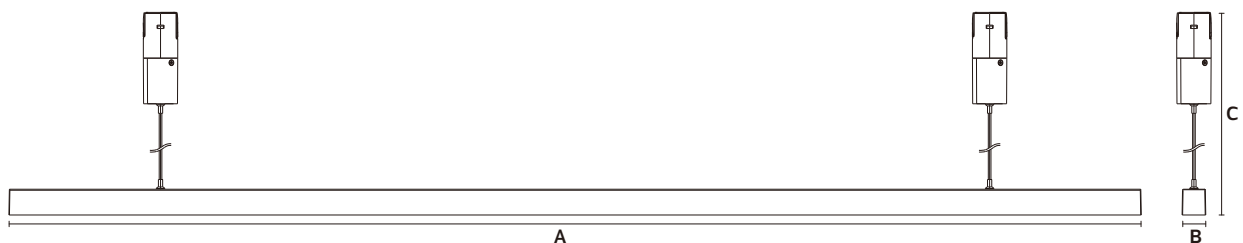


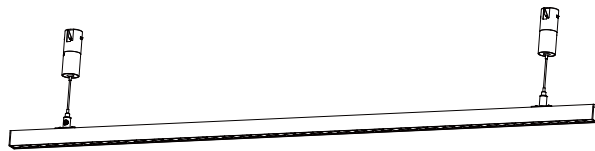


Description:
LED FREE DOT SYSTEM

Main material:
Aluminum+PC

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

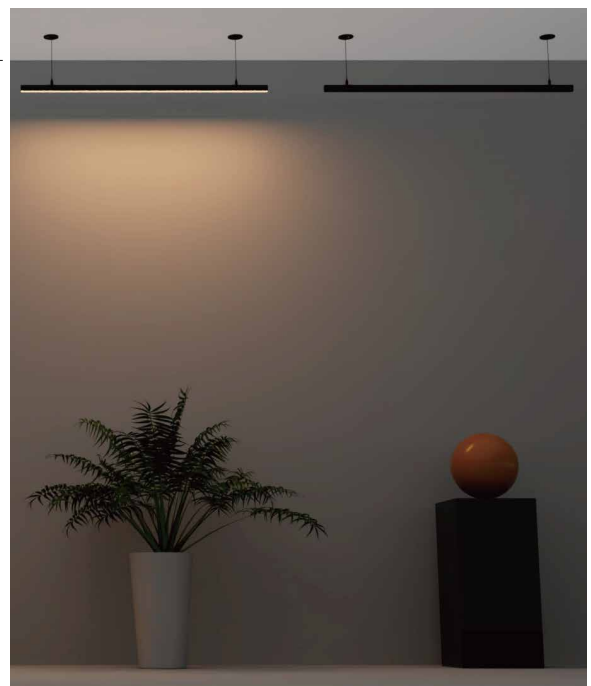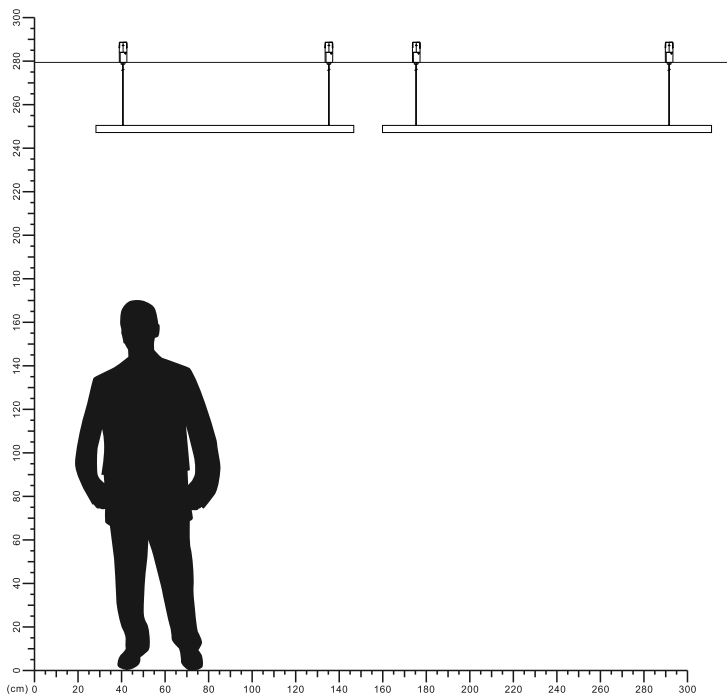

LED FREE DOT SYSTEM

NRP-FD-BASE


IP20






Item Code	Materials	Hole Size (mm)	
NRP-FD-TRM-70	Aluminum +PC	Φ50mm	0.16
NRP-FD-BASE-60	Aluminum +PC	Φ50mm	0.16

*Suitable for constant voltage DC48V power supply only

Dimensions in mm

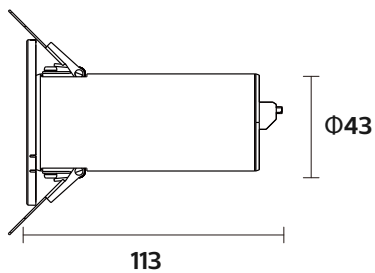

NRP-FD-TRM-70

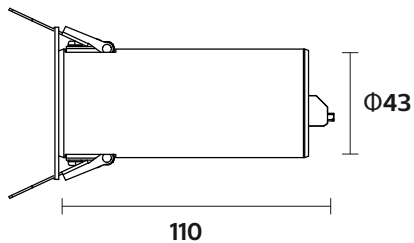

NRP-FD-BASE-60

