

1.Pre-Installation Check: Confirm that the lamp is undamaged and the clips are functioning properly. Ensure that the installation location is solid and can support the weight of the lamp.

3 Electrical Connection: Use a DC48V safety isolated LED driver to connect to the mounting base. Ensure that the power is disconnected during the installation process to avoid the risk of electric shock.

5. Ventilation: Ensure that the installation location has good ventilation to prevent the lamp from overheating.

6. Compliance with Standards: Follow local electrical installation standards and safety regulations during the installation process. If installing at a height, use a ladder or lift platform and ensure that the operation is safe to avoid accidents.

1 Cut two Ø50 hole in the ceiling

2 Press the button to insert the cable

3 Buckle automatically fall down

4 Push the lamp body stuck into the base to fix (push the lamp body can be removed)

Model No:	NRP-FSLO101-4-30K-BK-36D
Input:	DC48V
Power:	4W
Lumen Output:	272lm
CCT:	3000K
Beam angle:	36°
IP rated:	IP20
Ra:	≥90

Technical drawing of the battery showing top and side views with dimensions:

- Top view: Diameter is $\varnothing 32\text{mm}$.
- Side view: Height is 86mm.

رقم الطراز:	NRP-FSL0101-4-30K-BK-36D
التجه الكهربائي:	DC48V
الاستطاعة:	4W
التحج باليومين	272lm
درجة حرارة اللون CCT	3000K
درجة الحماية:	36°
زاوية الإضاءة:	IP20
مقياس التجسيد Ra	≥ 90

Technical drawing of the 1000mAh battery. The top view shows a circular battery with a diameter of 32mm. The side view shows a rectangular battery with a height of 86mm.

المصنع من قبل التركيب: تأكد من أن المصباح غير تالف وأن المشبك تعمل بشكل صحيح. وتأكد من أن موقع التركيب مثير ومنكهة تحمل وزن المصباح.


2. خطوات التركيب: قم بمحاذاة المصباح مع قاعدة التركيب واضغطه الداخل، يشير صوت "الفرق" إلى أن المشبك قد تم تثبيته في مكانه. اسحب المصباح برفق لتأكد من تثبيت المشبك بشكل آمن وعدم انزلاقه. لا تضغط على المشبك بقوة لتحيد الزناب المشبك أو المصباح.

3. التوصيل الكهربائي: استخدم مفك LED بجهد DC68 فولت لتوصيل المصباح بقاعدة التركيب. تأكد من فصل مصدر الطاقة أثناء عملية التركيب للتحجب خطر التعرض، لدمجها كإضاءة.

הַיְּהוָה יִשְׁמַר אֶת צְדָקָתְךָ יְהוָה יִשְׁמַר אֶת צְדָקָתְךָ

وتأكد من أن المصباح يعمل، بأمان لتجنب الحوادث.

خطبة الجمعة

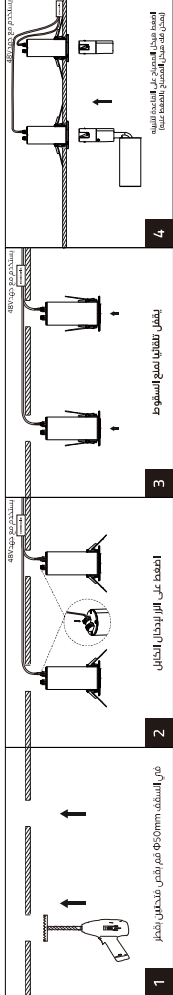

1.Pre-Installation Check: Confirm that the lamp is undamaged and the clips are functioning properly. Ensure that the installation location is solid and can support the weight of the lamp.

3 Electrical Connection: Use a DC48V safety isolated LED driver to connect to the mounting base. Ensure that the power is disconnected during the installation process to avoid the risk of electric shock.

5. Ventilation: Ensure that the installation location has good ventilation to prevent the lamp from overheating.

6. Compliance with Standards: Follow local electrical installation standards and safety regulations during the installation process. If installing at a height, use a ladder or lift platform and ensure that the operation is safe to avoid accidents.

1 Cut two Ø50 hole in the ceiling

2 Press the button to insert the cable

3 Buckle automatically fall down

4 Push the lamp body stuck into the base to fix (push the lamp body can be removed)

Model No:	NRP-FSLO101-4-30K-BK-36D
Input:	DC48V
Power:	4W
Lumen Output:	272lm
CCT:	3000K
Beam angle:	36°
IP rated:	IP20
Ra:	≥90

Technical drawing of the battery showing top and side views with dimensions:

- Top view: Diameter is $\varnothing 32\text{mm}$.
- Side view: Height is 86mm.

رقم الطراز:	NRP-FSL0101-4-30K-BK-36D
التجه الكهربائي:	DC48V
الاستطاعة:	4W
التحج باليومين	272lm
درجة حرارة اللون CCT	3000K
درجة الحماية:	36°
زاوية الإضاءة:	IP20
مقياس التجسيد Ra	≥ 90

Technical drawing of the 1000mAh battery. The top view shows a circular battery with a diameter of 32mm. The side view shows a rectangular battery with a height of 86mm.

