





LED FREE DOT SYSTEM


NRP-FSL0101 Series
IP20



Model No	P(W)	CCT	Beam Angle	Total Lumen	Dimensions in mm		kg
					A	B	
NRP-FSL0101-4-30K-BK-20D	4	3000K	20°	272	Φ32	86	0.11
NRP-FSL0101-4-30K-BK-36D	4	3000K	36°	272	Φ32	86	0.11
NRP-FSL0101-4-40K-BK-36D	4	4000K	36°	272	Φ32	86	0.11

Dimensions in mm







Description:
Combination Of Embedded Lamps


Main material:
Die -cast aluminum+PC

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

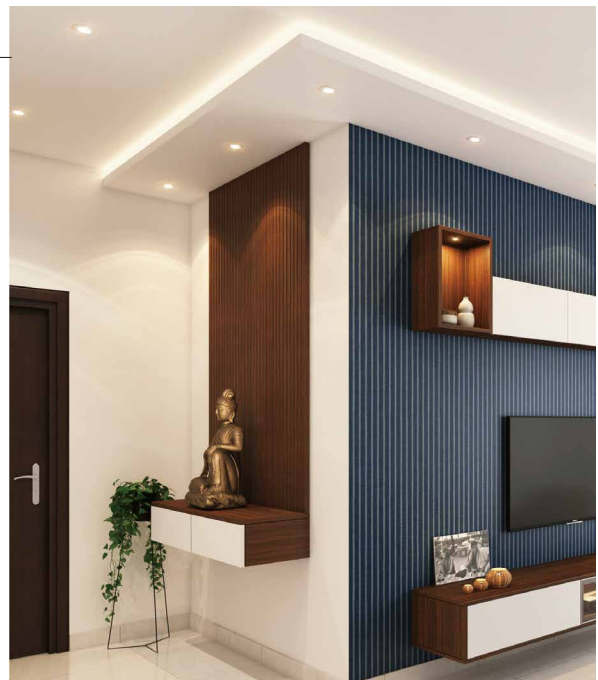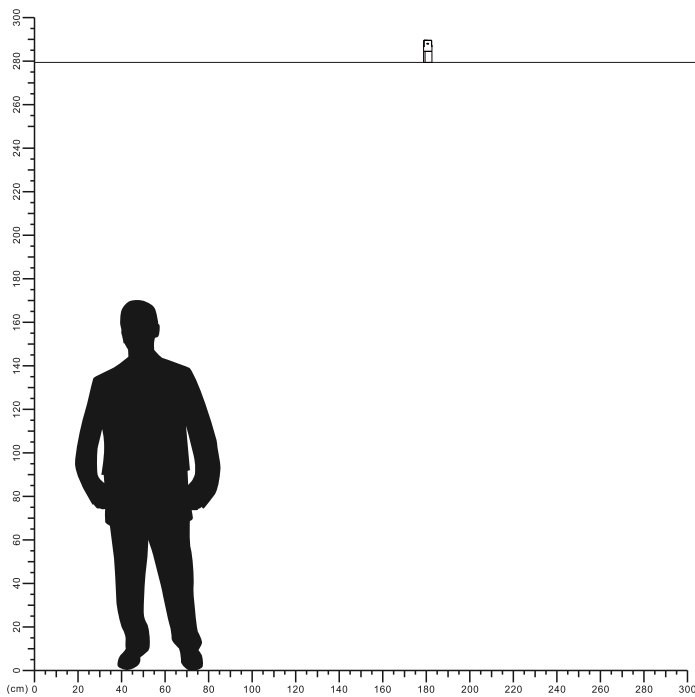


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

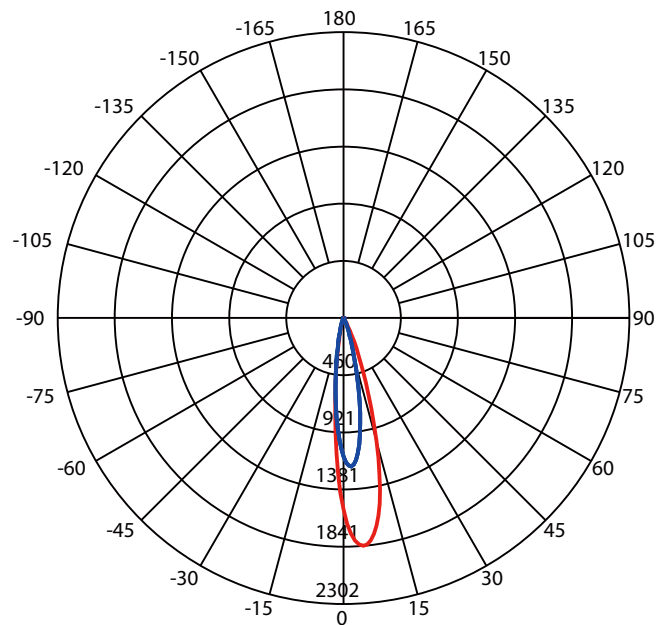


Beam Angle(50%) C0-180,C90-270: 19.8 deg,18.0 deg

C0-180 — C90-270 —

Illuminance at a Distance

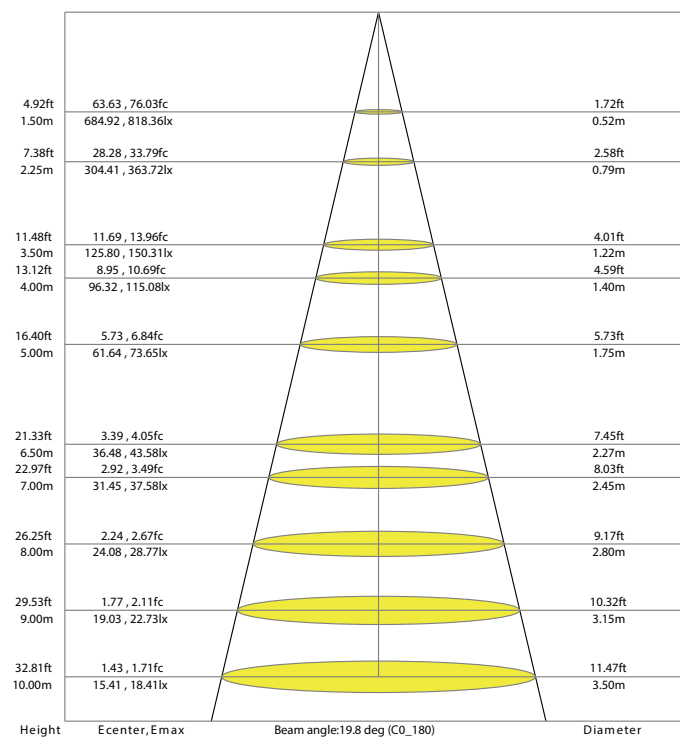


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

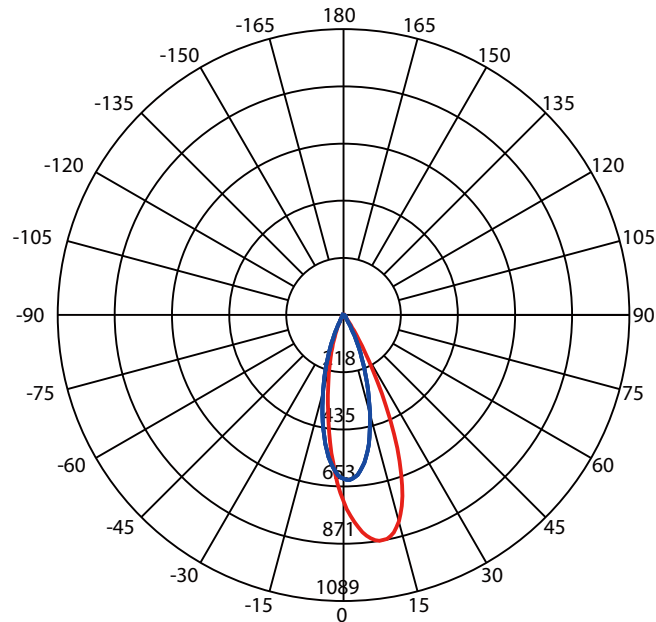


Beam Angle(50%) C0-180,C90-270: 31.4 deg,32.1 deg

C0-180 — C90-270 —

Illuminance at a Distance

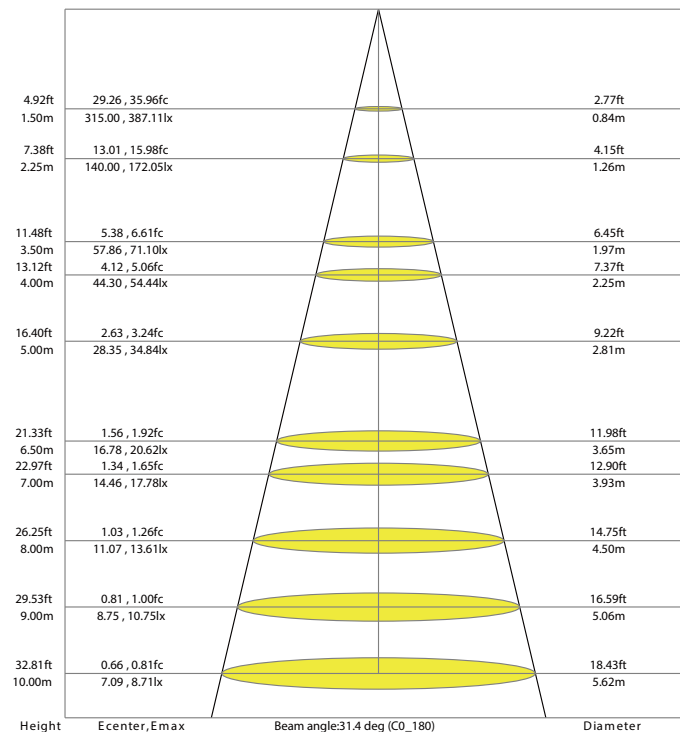


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

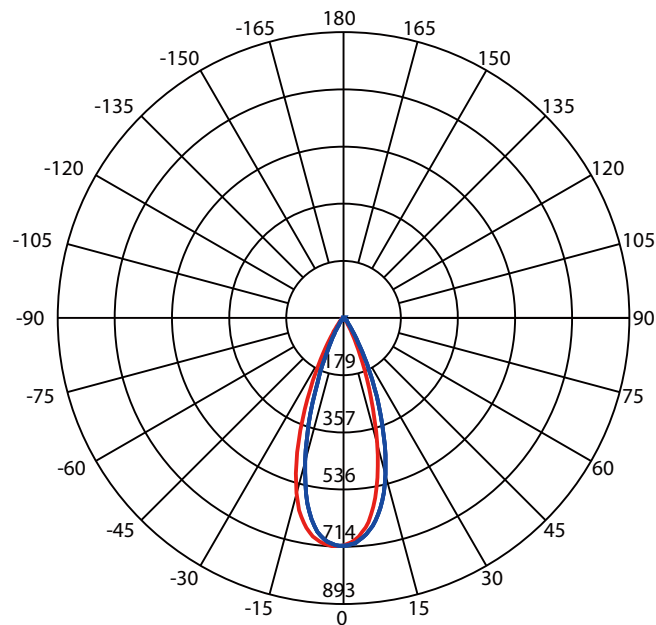

Beam Angle(50%) C0-180,C90-270: 37.9 deg,37.9 deg

C0-180 — C90-270 —

Illuminance at a Distance

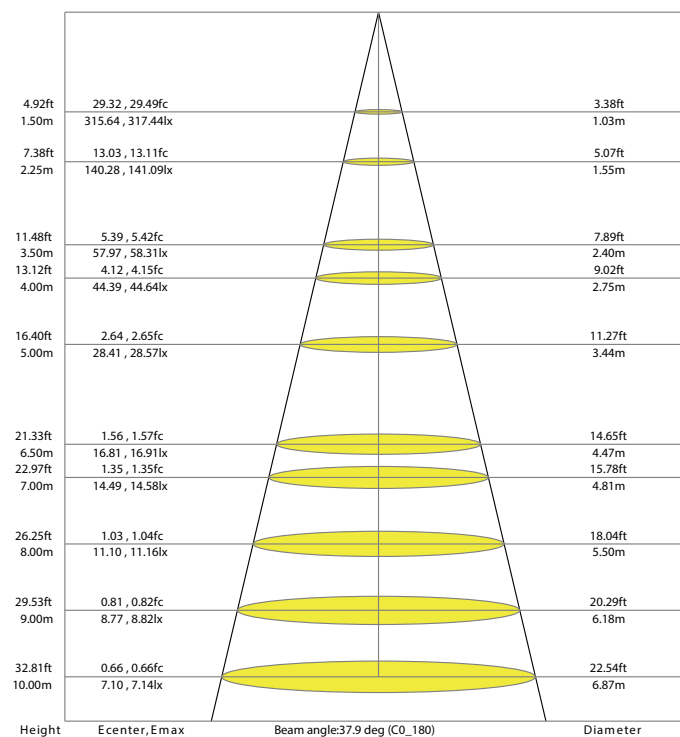

LED FREE DOT SYSTEM

NRP-FD-BASE

IP20




RoHS




Item Code	Materials	Hole Size (mm)	
NRP-FD-TRM-70	Aluminum +PC	Φ50mm	0.16
NRP-FD-BASE-60	Aluminum +PC	Φ50mm	0.16

*Suitable for constant voltage DC48V power supply only

Dimensions in mm

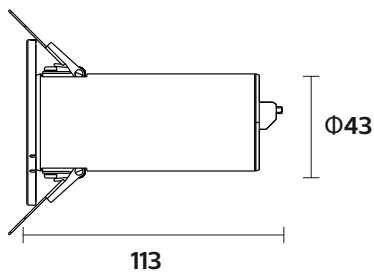

NRP-FD-TRM-70

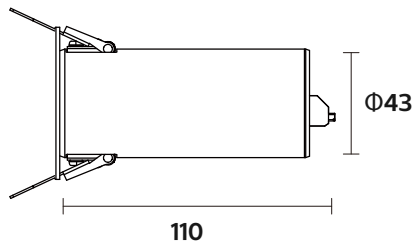

NRP-FD-BASE-60

