


GU10 LED Lamp


NRP-GU10-7 Series

IP20




Item Code	P (W)	CCT	Total Lumen	lm/w	PF	Color	Dimensions in mm		
							A	B	
NRP-GU10-7-27K-BK-60D	7	2700K	560lm	80lm/w	>0.9	Black	Φ50	67	0.1
NRP-GU10-7-30K-BK-60D	7	3000K	581lm	83lm/w	>0.9	Black	Φ50	67	0.1
NRP-GU10-7-40K-BK-60D	7	4000K	595lm	85lm/w	>0.9	Black	Φ50	67	0.1
NRP-GU10-7-65K-BK-60D	7	6500K	616lm	88lm/w	>0.9	Black	Φ50	67	0.1
NRP-GU10-7-27K-WH-60D	7	2700K	560lm	80lm/w	>0.9	White	Φ50	67	0.1
NRP-GU10-7-30K-WH-60D	7	3000K	581lm	83lm/w	>0.9	White	Φ50	67	0.1
NRP-GU10-7-40K-WH-60D	7	4000K	595lm	85lm/w	>0.9	White	Φ50	67	0.1
NRP-GU10-7-65K-WH-60D	7	6500K	616lm	88lm/w	>0.9	White	Φ50	67	0.1
NRP-GU10-7-27K-SL-60D	7	2700K	560lm	80lm/w	>0.9	Silver	Φ50	67	0.1
NRP-GU10-7-30K-SL-60D	7	3000K	581lm	83lm/w	>0.9	Silver	Φ50	67	0.1
NRP-GU10-7-40K-SL-60D	7	4000K	595lm	85lm/w	>0.9	Silver	Φ50	67	0.1
NRP-GU10-7-65K-SL-60D	7	6500K	616lm	88lm/w	>0.9	Silver	Φ50	67	0.1

Dimensions in mm

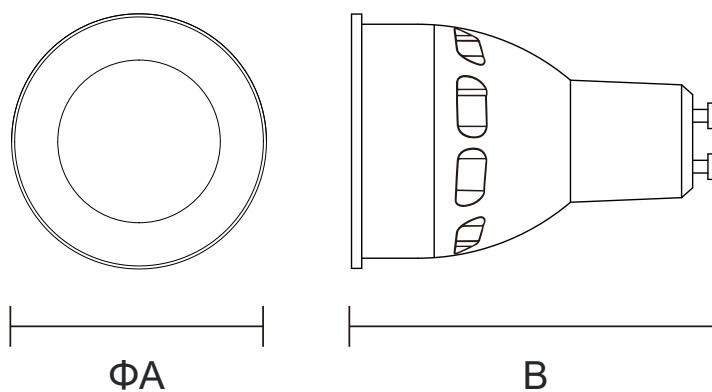

Accessories

Picture	Model No	Material	Beam angle	Size in mm	
	NRP-GU10-7-LENS-24D	PC	24°	Φ35*12	0.01
	NRP-GU10-7-LENS-36D	PC	36°	Φ35*12	0.01

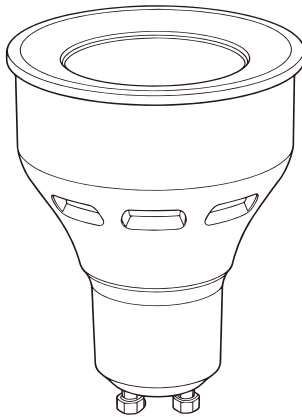


Description:
GU10 LED Lamp


Main material:
Aluminum +PC

Specification
Energy saving, up to 85% energy saving
comparing to standard halogen and incandescent
lamps
High quality light, high color rendering, less heat,
no UV or IR radiation
IP20

Applications
.Shopping mall
.Hotels
.Exhibition hall
.Art hall
.Museums

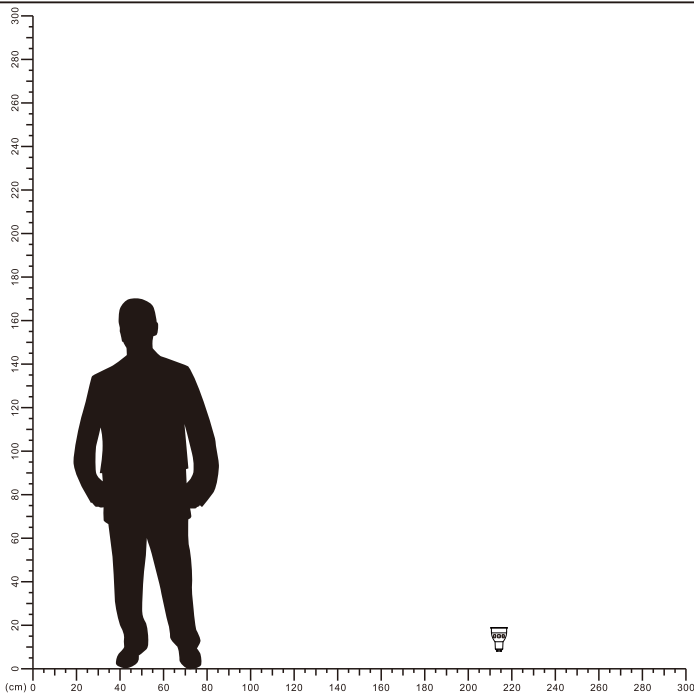


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

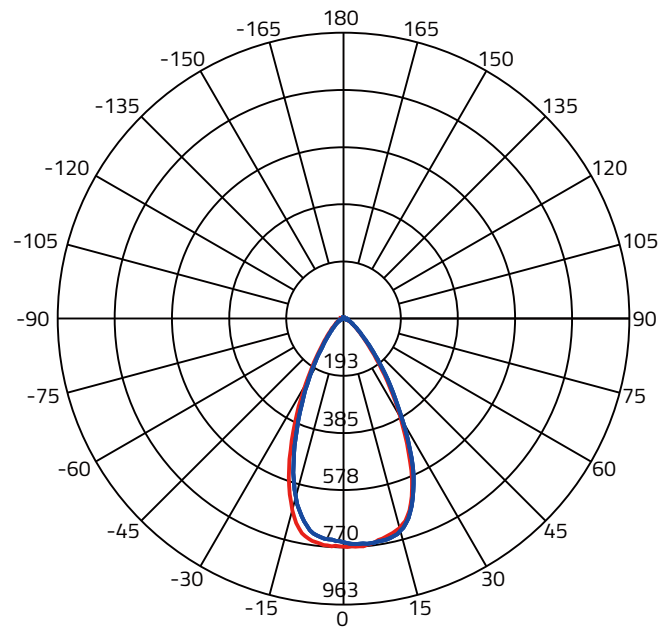


Beam Angle(50%) C0-180,C90-270: 54.9 deg,54.4 deg

C0-180 — C90-270 —


Illuminance at a Distance

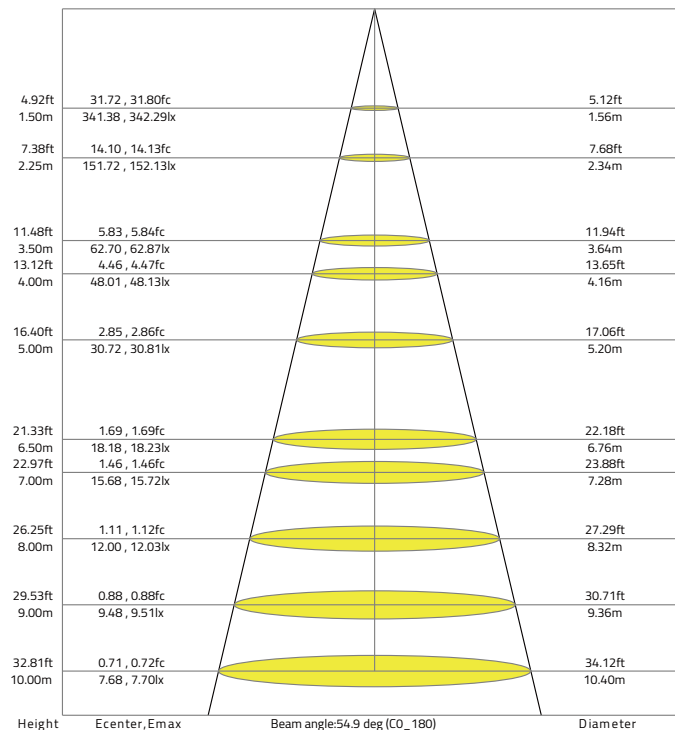

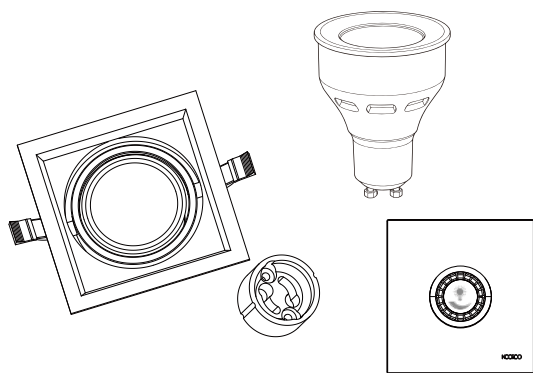


1

Turn off The Power

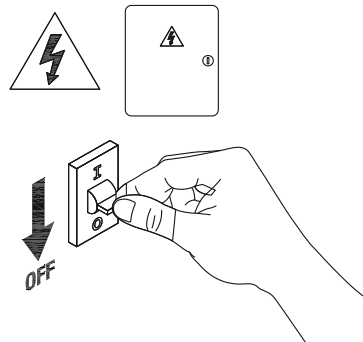


2

Cut a hole in the ceiling




3

Snap the LED cup into the outer ring




4

Snap the LED cup into the Lamp cup base




5

Buckle automatically fall down




6


installaion is complete



7


The dimming panel is connected to the luminaire cable

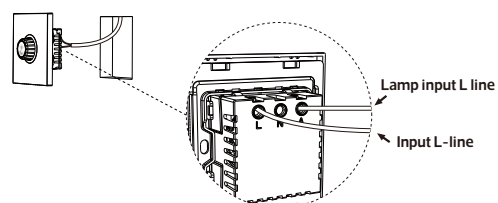



8

Turn on the power

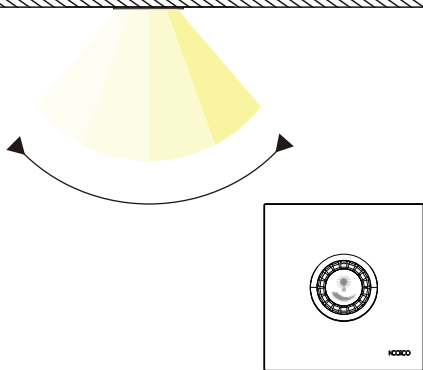

9

The rotating dimmer controls the light level

