


## GU10 LED Lamp


NRP-GU10-7 Series

IP20




| Item Code             | P (W) | CCT   | Total Lumen | lm/w   | PF   | Color  | Dimensions in mm<br>A B |    | kg  |
|-----------------------|-------|-------|-------------|--------|------|--------|-------------------------|----|-----|
| NRP-GU10-7-27K-BK-60D | 7     | 2700K | 560lm       | 80lm/w | >0.9 | Black  | Φ50                     | 67 | 0.1 |
| NRP-GU10-7-30K-BK-60D | 7     | 3000K | 581lm       | 83lm/w | >0.9 | Black  | Φ50                     | 67 | 0.1 |
| NRP-GU10-7-40K-BK-60D | 7     | 4000K | 595lm       | 85lm/w | >0.9 | Black  | Φ50                     | 67 | 0.1 |
| NRP-GU10-7-65K-BK-60D | 7     | 6500K | 616lm       | 88lm/w | >0.9 | Black  | Φ50                     | 67 | 0.1 |
| NRP-GU10-7-27K-WH-60D | 7     | 2700K | 560lm       | 80lm/w | >0.9 | White  | Φ50                     | 67 | 0.1 |
| NRP-GU10-7-30K-WH-60D | 7     | 3000K | 581lm       | 83lm/w | >0.9 | White  | Φ50                     | 67 | 0.1 |
| NRP-GU10-7-40K-WH-60D | 7     | 4000K | 595lm       | 85lm/w | >0.9 | White  | Φ50                     | 67 | 0.1 |
| NRP-GU10-7-65K-WH-60D | 7     | 6500K | 616lm       | 88lm/w | >0.9 | White  | Φ50                     | 67 | 0.1 |
| NRP-GU10-7-27K-SL-60D | 7     | 2700K | 560lm       | 80lm/w | >0.9 | Silver | Φ50                     | 67 | 0.1 |
| NRP-GU10-7-30K-SL-60D | 7     | 3000K | 581lm       | 83lm/w | >0.9 | Silver | Φ50                     | 67 | 0.1 |
| NRP-GU10-7-40K-SL-60D | 7     | 4000K | 595lm       | 85lm/w | >0.9 | Silver | Φ50                     | 67 | 0.1 |
| NRP-GU10-7-65K-SL-60D | 7     | 6500K | 616lm       | 88lm/w | >0.9 | Silver | Φ50                     | 67 | 0.1 |

### Dimensions in mm

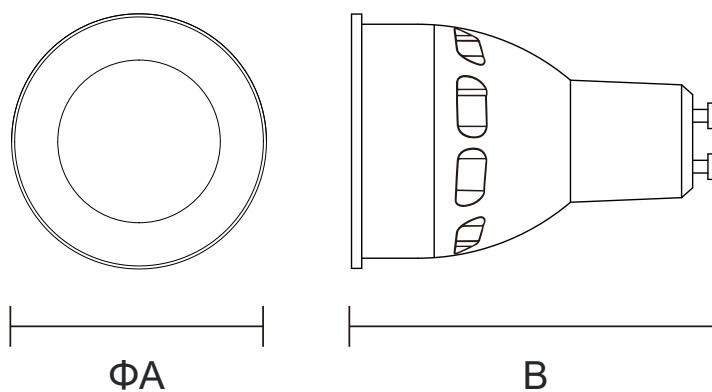

## Accessories

| Picture                                                                             | Model No            | Material | Beam angle | Size in mm          |  |
|-------------------------------------------------------------------------------------|---------------------|----------|------------|---------------------|---------------------------------------------------------------------------------------|
|  | NRP-GU10-7-LENS-24D | PC       | 24°        | $\Phi 35 \times 12$ | 0.01                                                                                  |
|  | NRP-GU10-7-LENS-36D | PC       | 36°        | $\Phi 35 \times 12$ | 0.01                                                                                  |

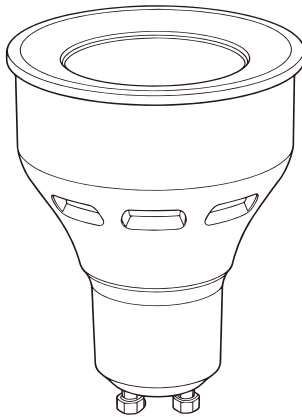


**Description:**  
GU10 LED Lamp


**Main material:**  
Aluminum +PC

**Specification**  
Energy saving, up to 85% energy saving  
comparing to standard halogen and incandescent  
lamps  
High quality light, high color rendering, less heat,  
no UV or IR radiation  
IP20

**Applications**  
.Shopping mall  
.Hotels  
.Exhibition hall  
.Art hall  
.Museums

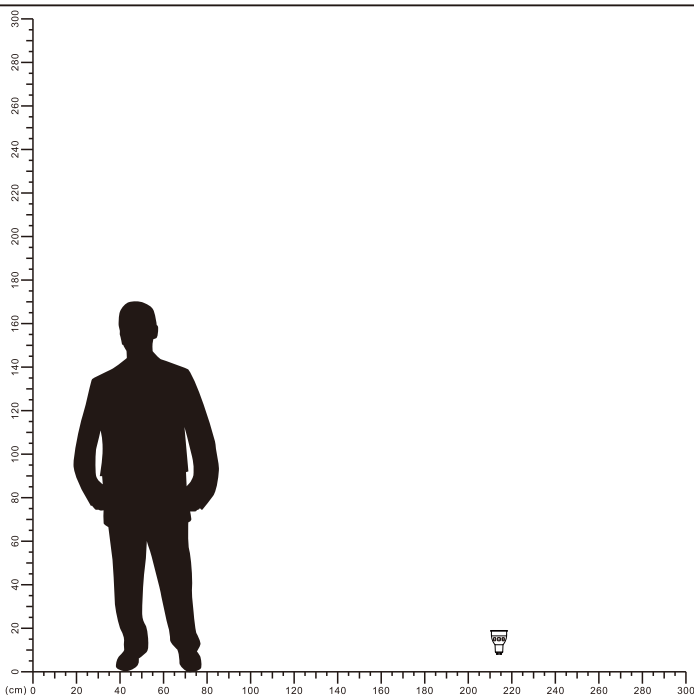


## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

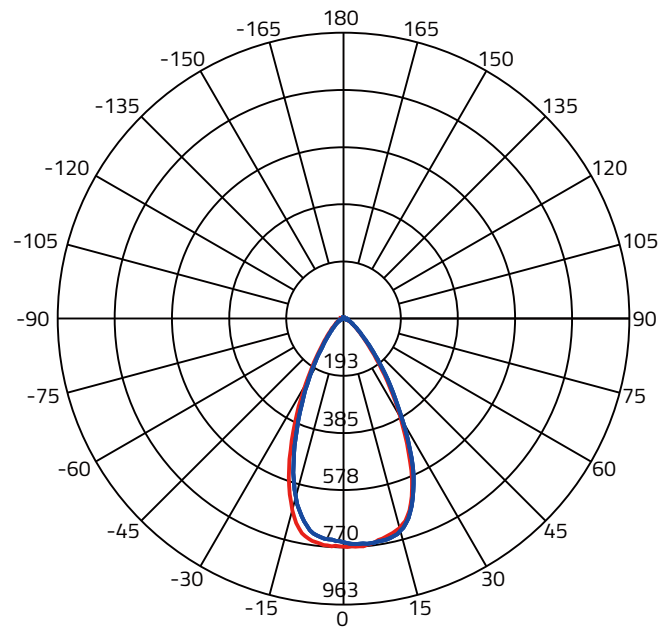


Beam Angle(50%) C0-180,C90-270: 54.9 deg,54.4 deg

C0-180 — C90-270 —


## Illuminance at a Distance

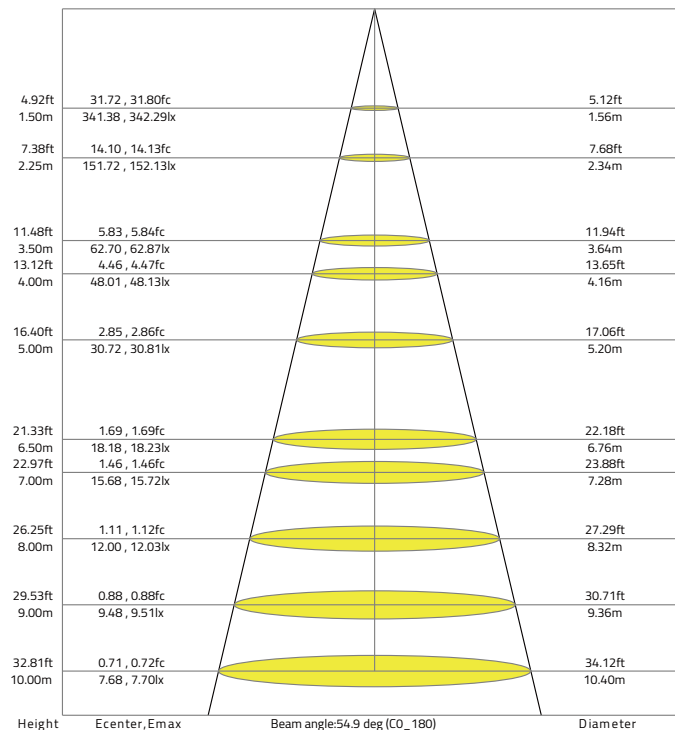

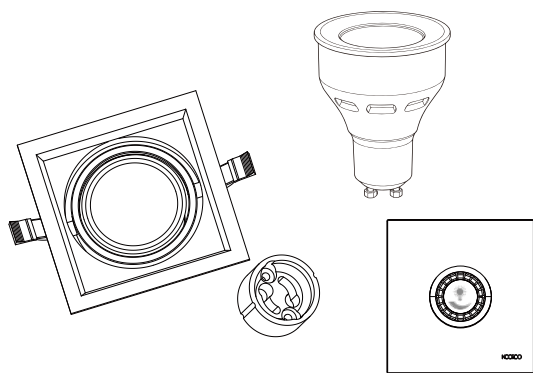


**1**

Turn off The Power

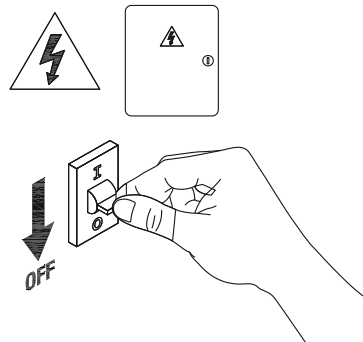


**2**

Cut a hole in the ceiling




**3**

Snap the LED cup into the outer ring




**4**

Snap the LED cup into the Lamp cup base




**5**

Buckle automatically fall down




**6**


installaion is complete



**7**


The dimming panel is connected to the luminaire cable

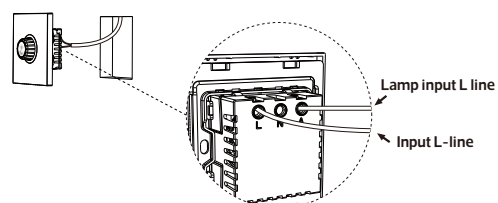



8

Turn on the power

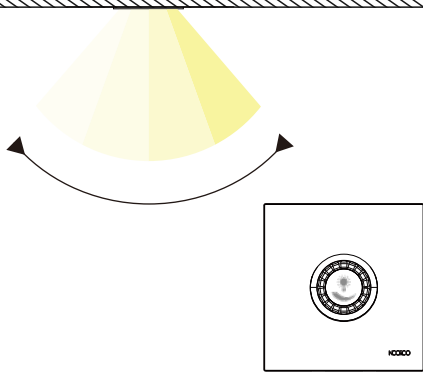

9

The rotating dimmer controls the light level

