NOORCO نوركو PLUS بلس

Meshkati مشكاتي للإنارة والكهرباء Lighting & electricity

5050-60L-220V

LED ROPE light

IP65

3 YEARS GUARANTEE

النور نوركو The light is NOORCO

bridgelux

SMD	85 lm/w		220V 240V	50Hz 60Hz	CCT 3200k 4000k 6000k	IP65	Ta 40℃	Max 40℃ Min 0℃	CRI >95	Life time 50,000h	Beam angle 120°	PF 0. 9

Specifications	P (W/M)	Output (lm/W)	IP	A	B	C	D
NRP-ST101	6w/m	85 Lm/w	IP65	50m	14mm	10mm	1m

White [5700–6500K]

Natural White [4000–5000K]

Warm [2800–3400K]

Dimensions in mm

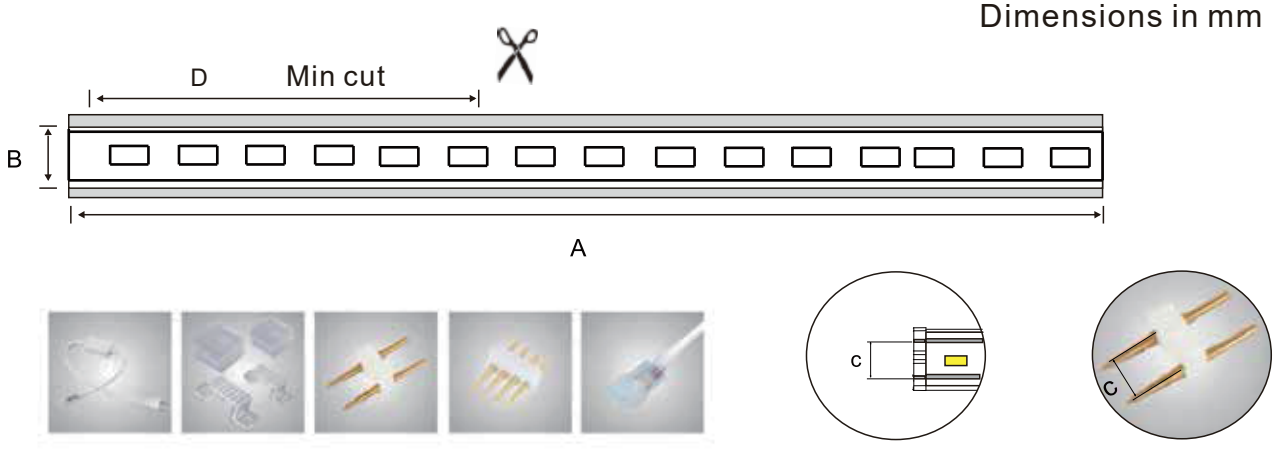

Luminous Intensity Distribution Curve

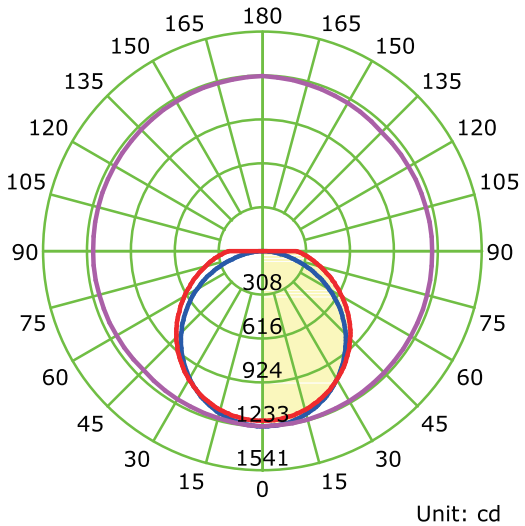

Unit: cd

Average Diffuse Angle(50%): 119.0°

C0-C180 C90-C270 G1

Illuminance at a Distance

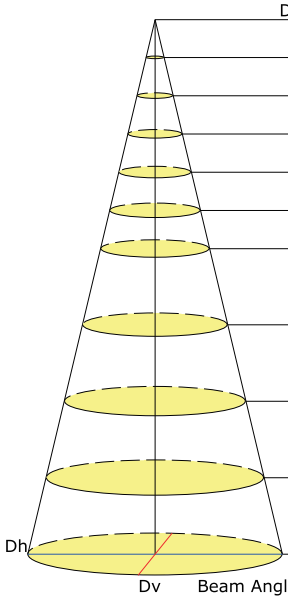

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1232.73	2.97/3.91	9.2	168.29
2.0	308.18	5.95/7.83	37.0	42.07
3.0	136.97	8.92/11.74	83.2	18.70
4.0	77.05	11.90/15.66	147.8	10.52
5.0	49.31	14.87/19.57	231.0	6.73
6.0	34.24	17.85/23.48	332.6	4.67
8.0	19.26	23.79/31.31	591.3	2.63
10.0	12.33	29.74/39.14	923.9	1.68
12.0	8.56	35.69/46.97	1330.4	1.17
14.0	6.29	41.64/54.80	1810.8	0.86

Beam Angle(B): H112.2 V125.9 Field Angle(F): H160.3 V181.0

Description:
LED ROPE LIGHT

Main material:
aluminum+PC cover
engineering plastic High quality aluminum spherical reflector for soft and comfortable light.

Specification:
Energy saving,up to 85% energy saving comparing to standard halogen and incandescent lamps
Long life,up to 50,000 hours
High quality light,high color rending,less heat, no UV or IR radiation

Applications
Shopping mall
Office buildings, exhibition hall and so on public lighting places
. Domestic

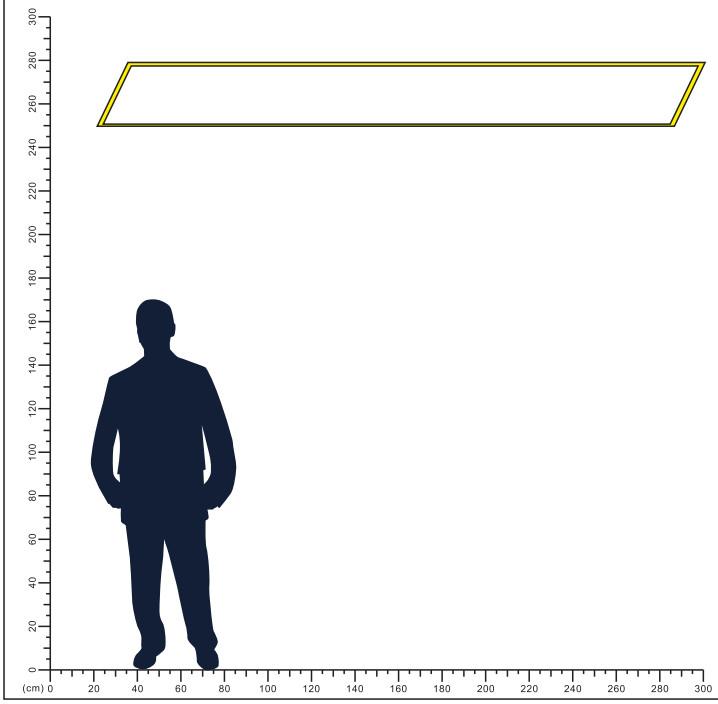

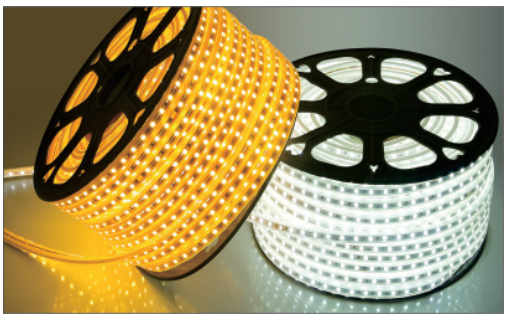

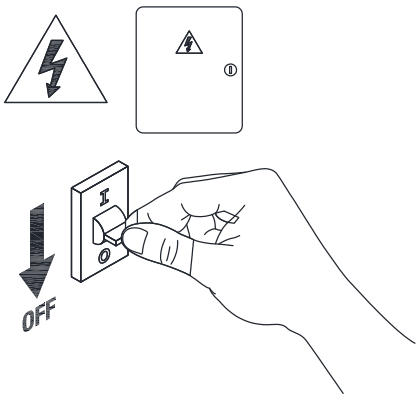

1a

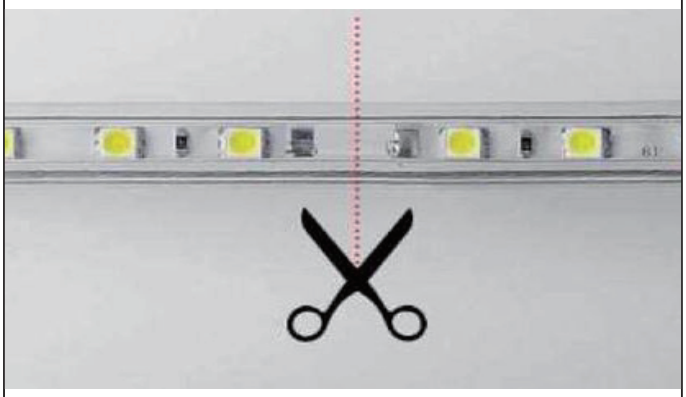

1b

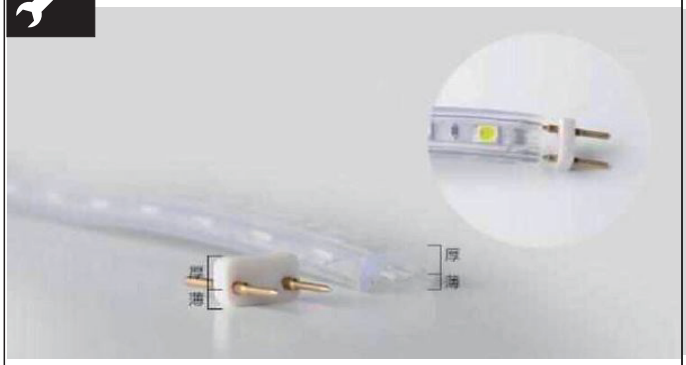

2

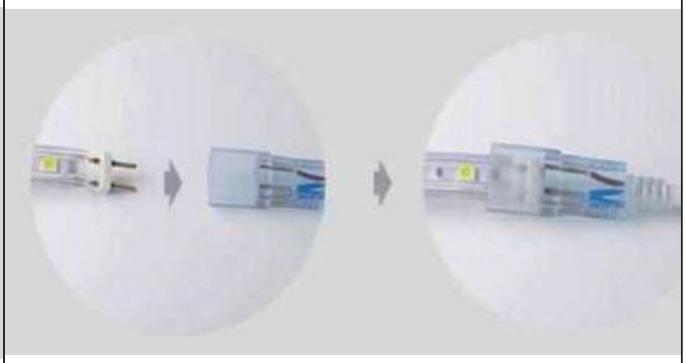

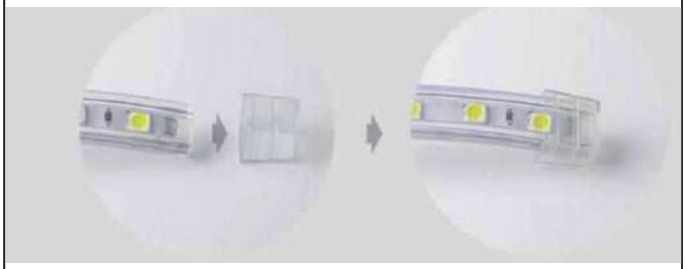

3

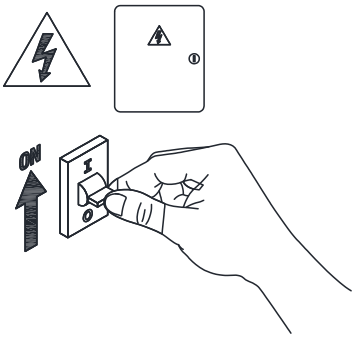

4

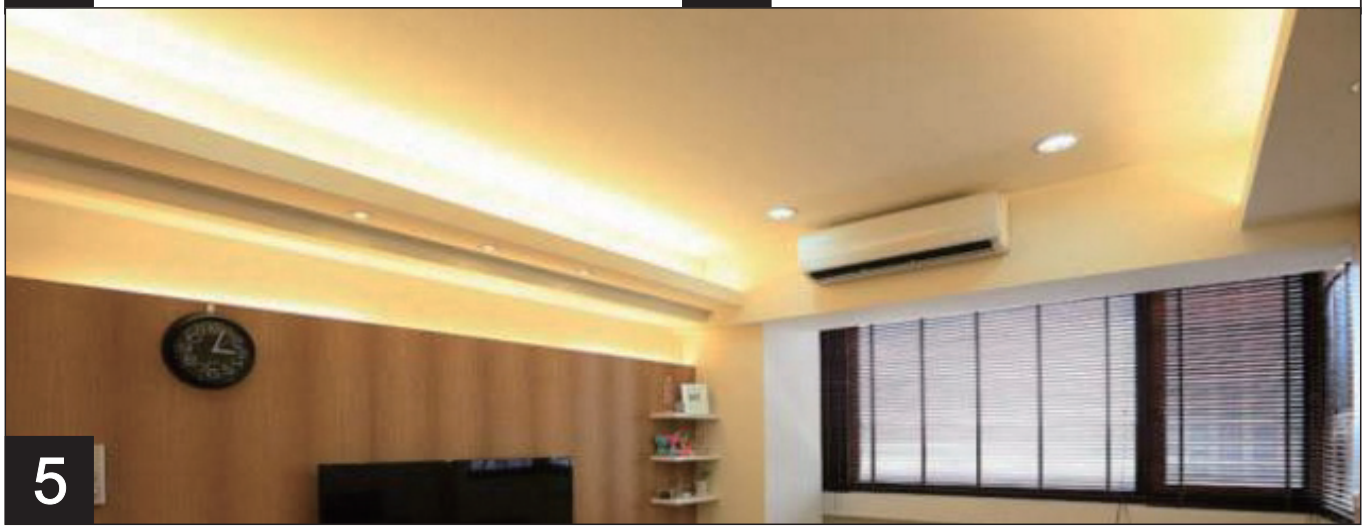

5