



T5 LED Line Light

NRP-T5-DIM Series
IP20




RoHS



Item Code	P(W)	Displacement Factor	CCT(K)	Output (lm)	lm/w	Dimensions in mm			kg
A	B	C							
NRP-T5-DIM-30-4	4	≥0.4	2700/3000/4000	312	78	300	21	35	0.05
NRP-T5-DIM-60-7	7	≥0.7	2700/3000/4000	616	88	600	21	35	0.1
NRP-T5-DIM-90-12	12	≥0.7	2700/3000/4000	1280.4	106.7	900	21	35	0.15
NRP-T5-DIM-120-16	16	≥0.7	2700/3000/4000	1616	101	1200	21	35	0.2

Dimensions in mm

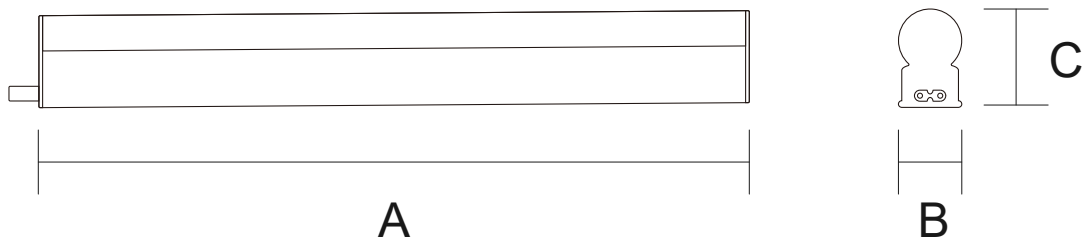




Description:
T5 LED Line Light


Main material:
PC

Specification:
Energy saving, upto 85% energy saving comparing to standard halogen and incandescent lamps Long life, upto 50,000 hours
High quality light, high color rendering, less heat, no UV or IR radiation


Applications
Shoping mall
Office buildings
Exhibition hall

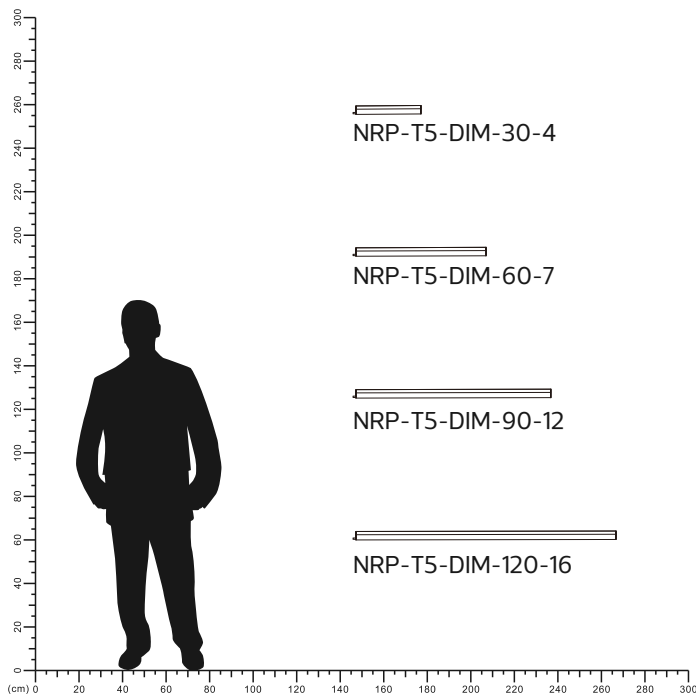

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

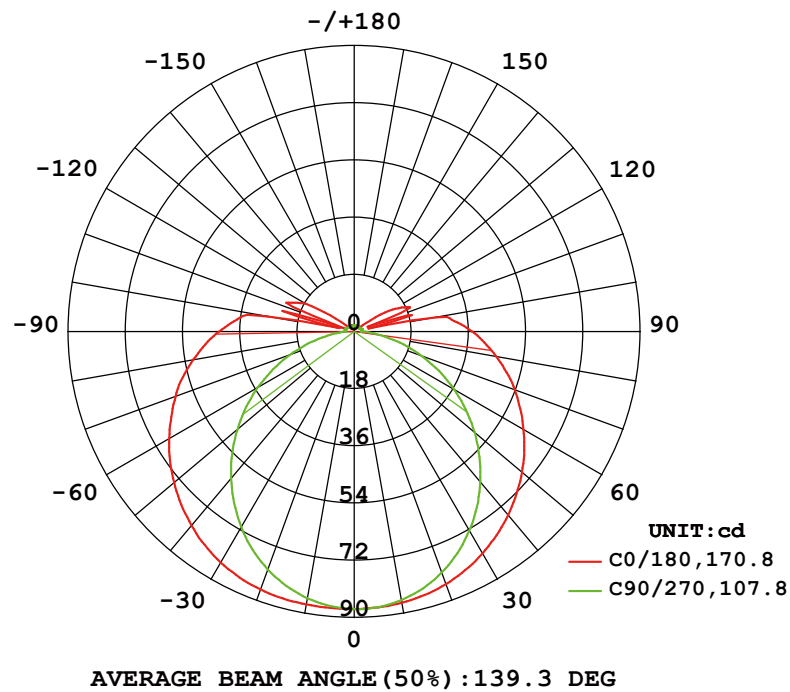


Illuminance at a Distance

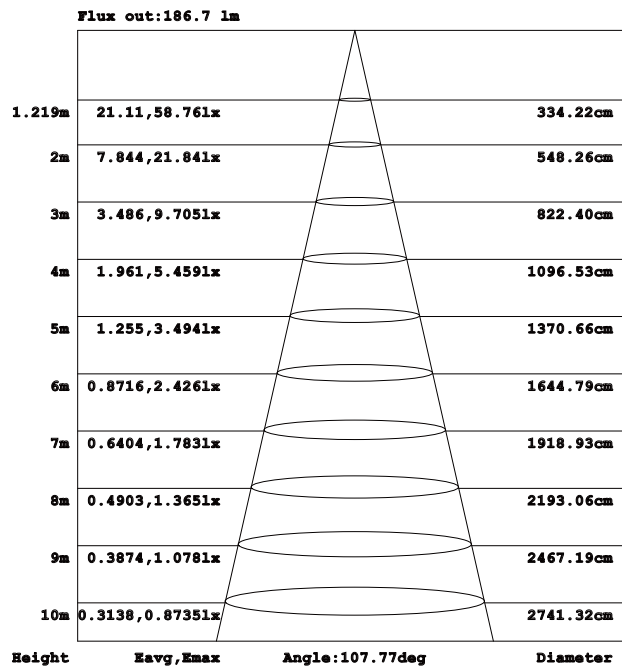


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code: NRP-T5-DIM-30-4

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

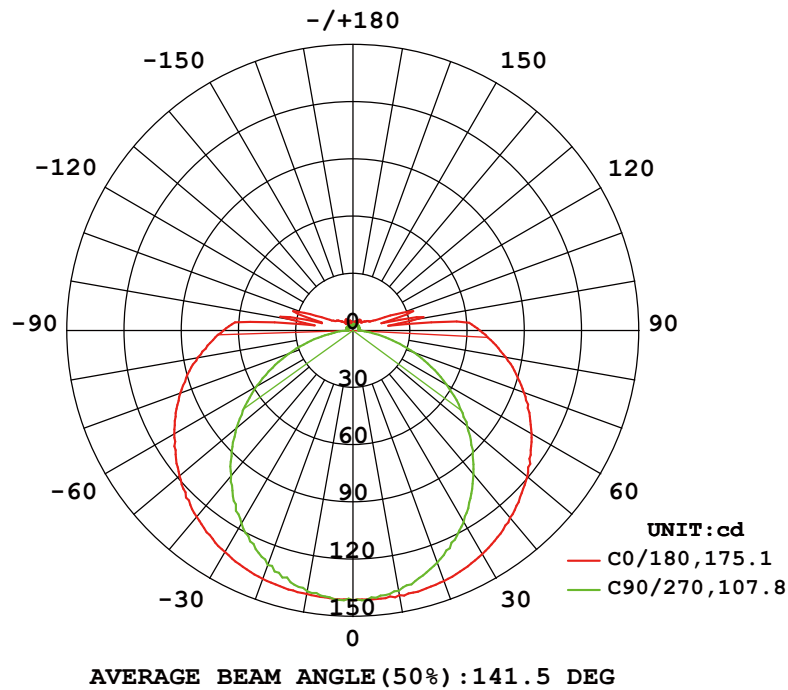


Illuminance at a Distance

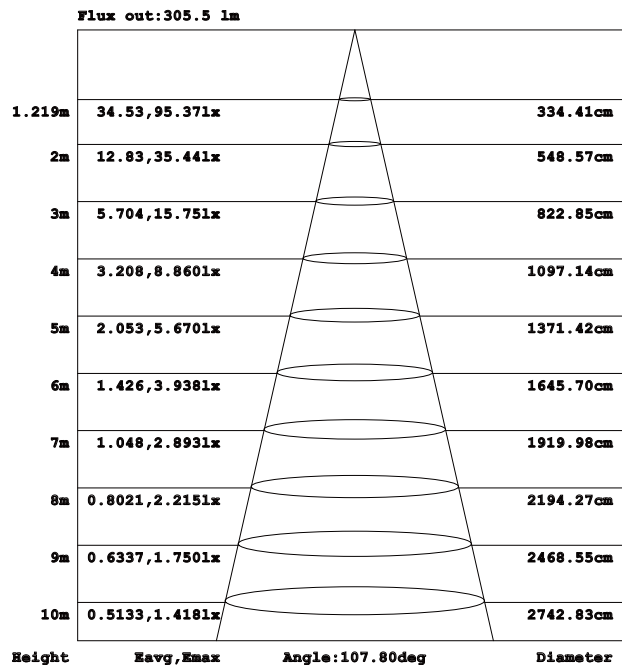


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code: NRP-T5-DIM-60-7

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

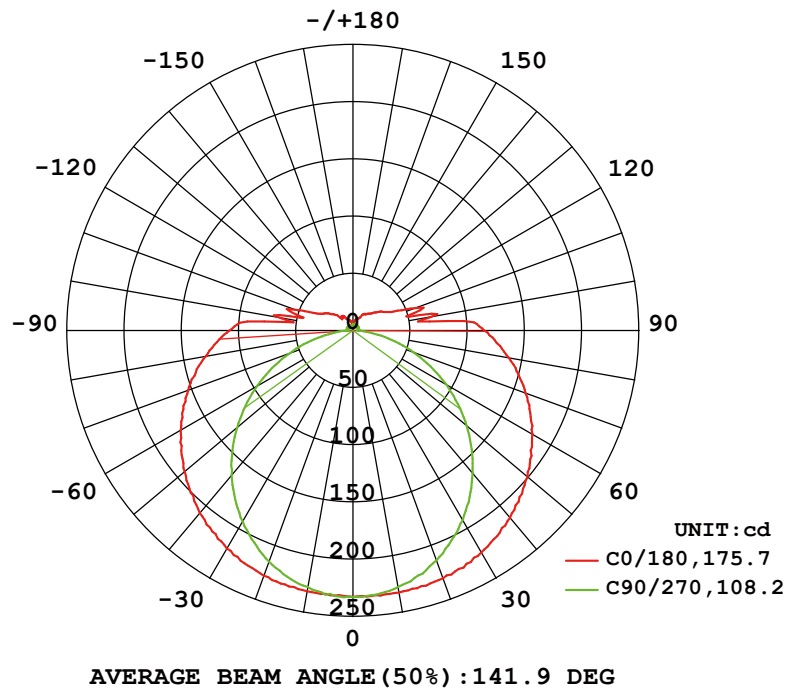


Illuminance at a Distance

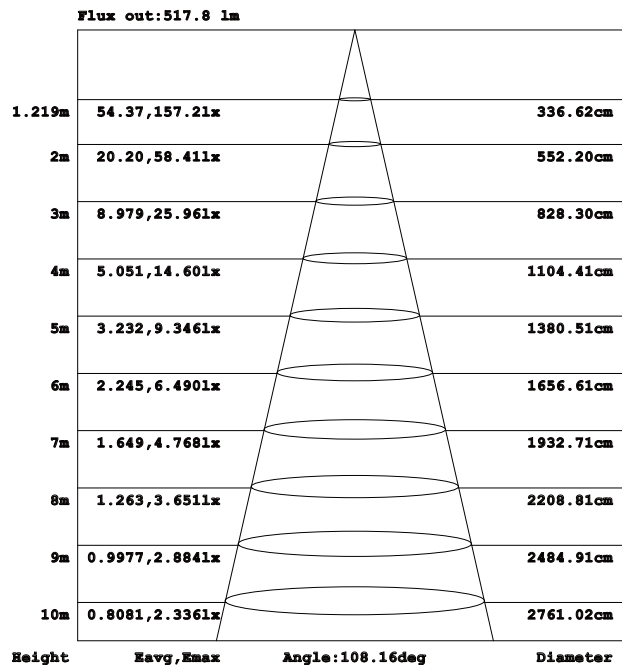


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code: NRP-T5-DIM-90-12

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

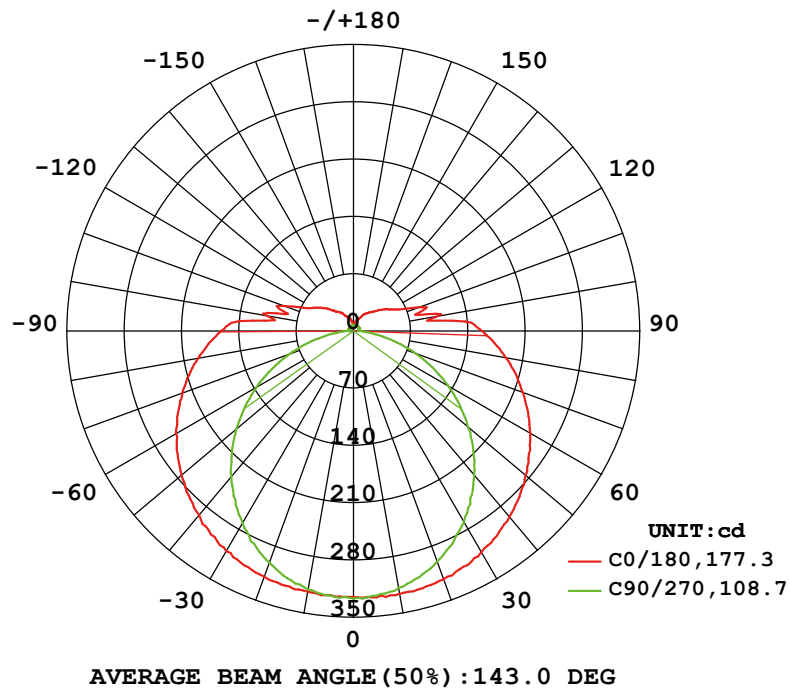


Illuminance at a Distance

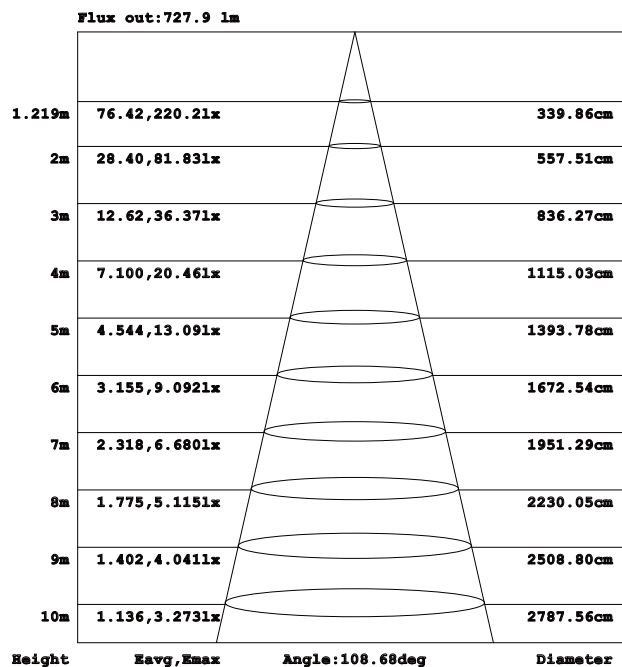

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Item Code: NRP-T5-DIM-120-16

Warm Tips:
Not more than five series

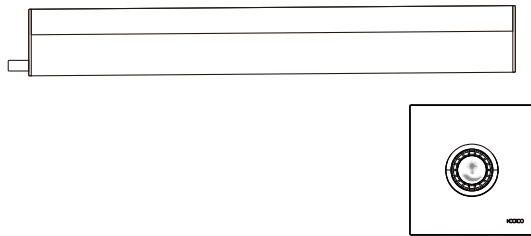


1

Turn off The Power

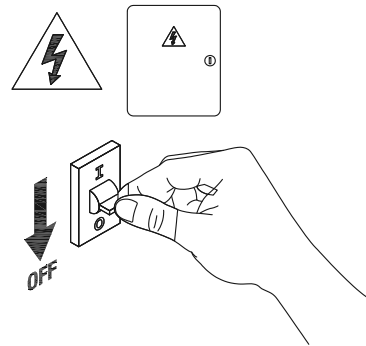


2

Install two clasps on the surface

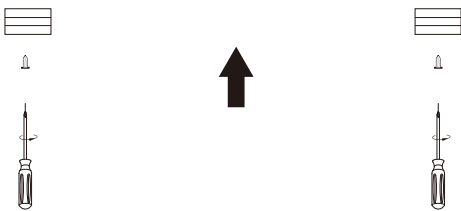

3

Clamp the T5 LED line light to the two clasps

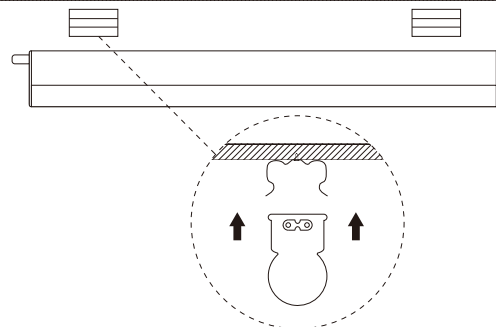


4

Connect the cable




5

The dimming panel is connected to the luminaire cable

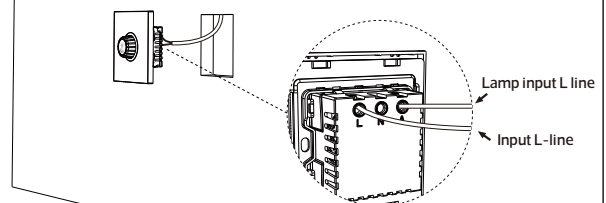

6

Turn on the power



7

The rotating dimmer controls the light level

