




LED TRACK LIGHT


NRP-TL102COB Series
IP20



Item Code	P (W)	CCT(K)	Displacement Factor	Output (lm)	lm/w	Color	Dimensions in mm			kg
							A	B	C	
NRP-TL102COB-10	10	3000	≥0.8	650	65	White/Black	124	Φ63	187	0.35
NRP-TL102COB-10	10	4000	≥0.8	710	71	White/Black	124	Φ63	187	0.35
NRP-TL102COB-20	20	3000	≥0.8	1600	80	White/Black	146	Φ85	202	0.54
NRP-TL102COB-20	20	4000	≥0.8	1600	80	White/Black	146	Φ85	202	0.54
NRP-TL102COB-30	30	3000	≥0.9	2220	74	White/Black	177	Φ95	230	0.73
NRP-TL102COB-30	30	4000	≥0.9	2190	73	White/Black	177	Φ95	230	0.73

Dimensions in mm

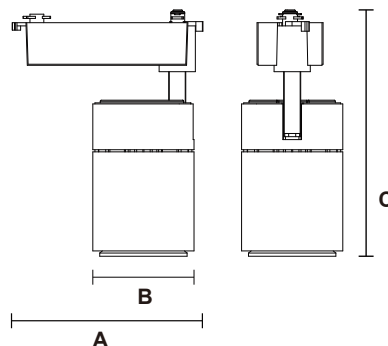

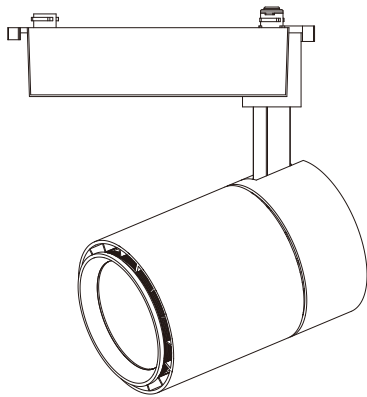

Description:

LED Track Light

Main material:


Aluminum+Engineering plastics

Specification


Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps High quality light, high color rendering, less heat, no UV or IR radiation LED driver is included IP20

Applications


- . Shoping mall
- . Office buildings
- . Exhibition hall

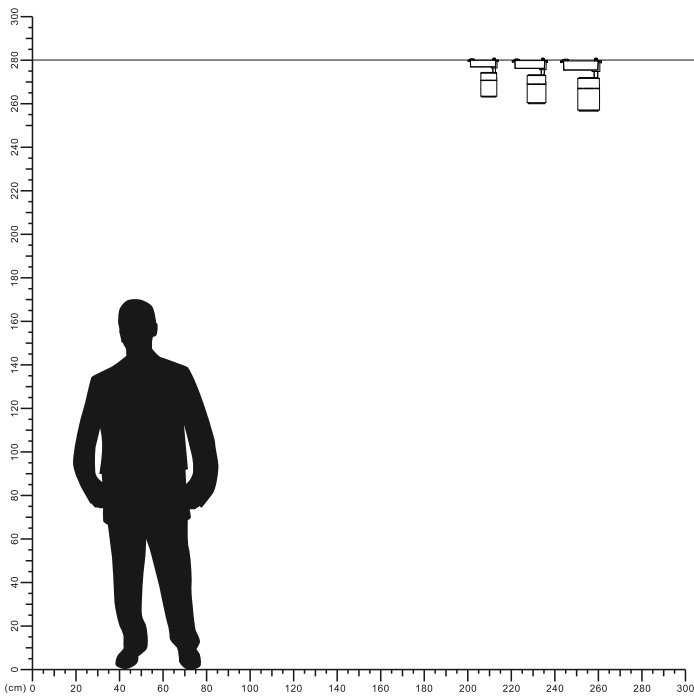

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

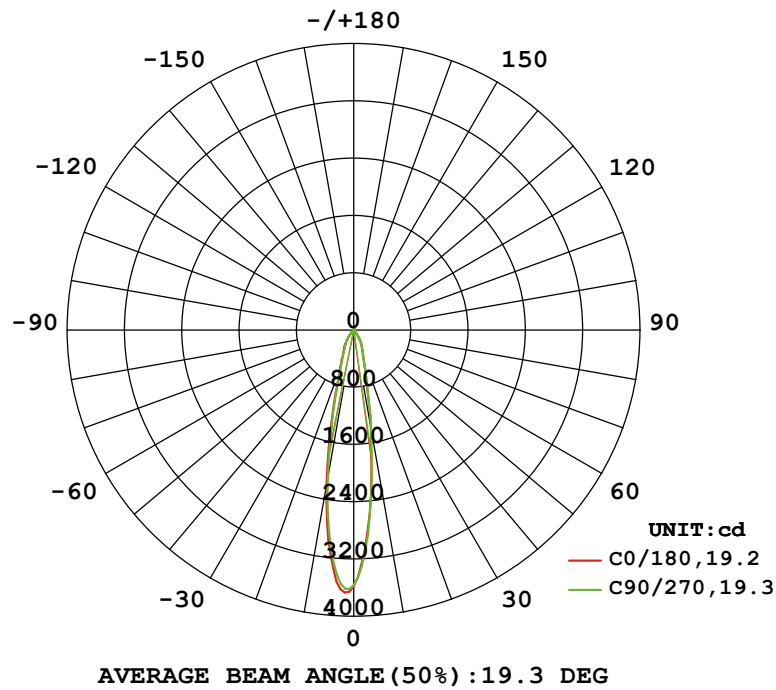


Illuminance at a Distance

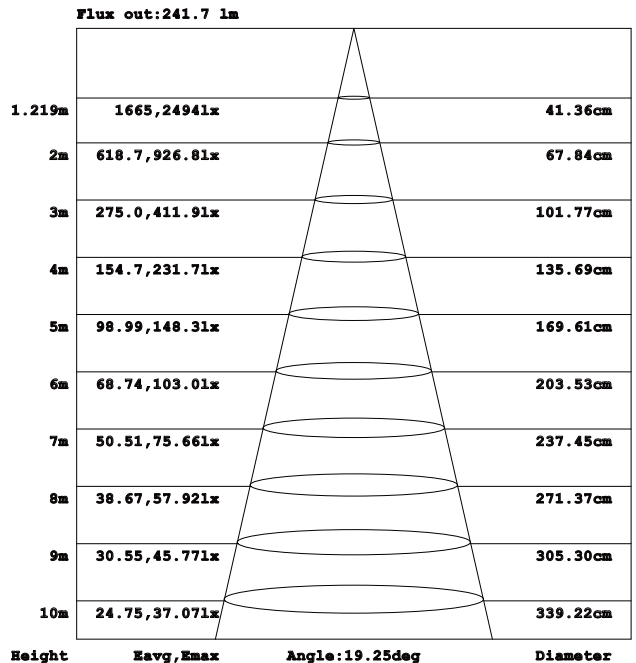


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code: NRP-TL102COB-10

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

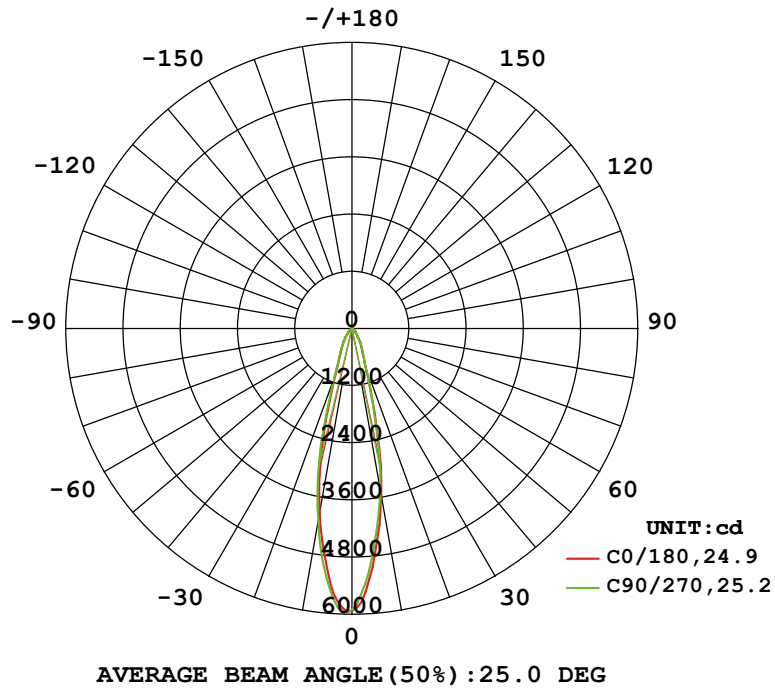


Illuminance at a Distance

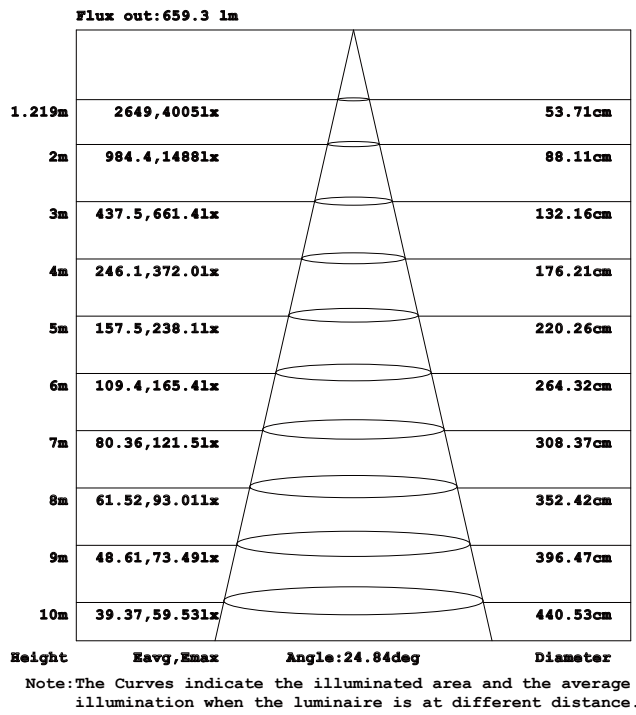


Item Code: NRP-TL102COB-20


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

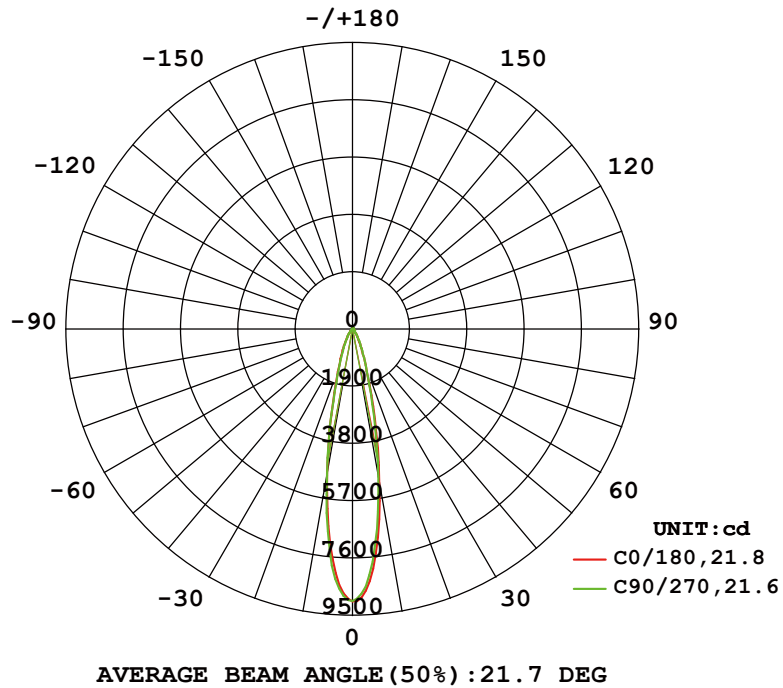

Illuminance at a Distance

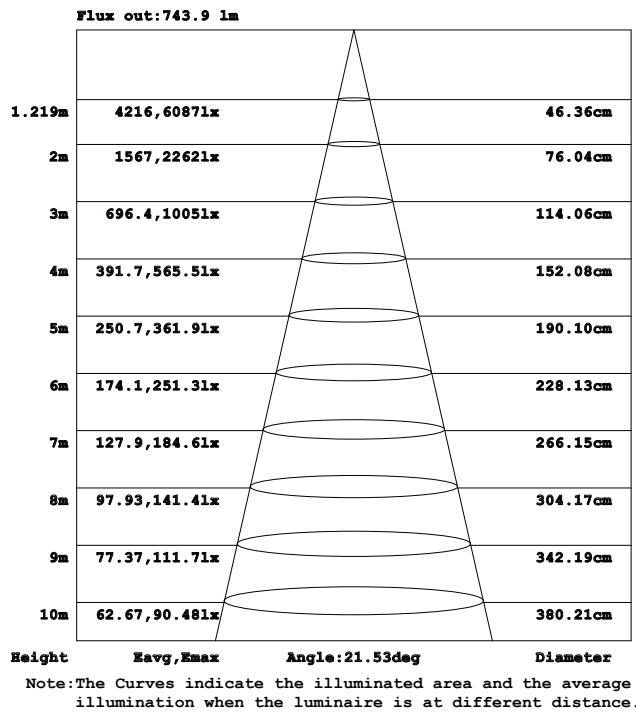


Item Code: NRP-TL102COB-30

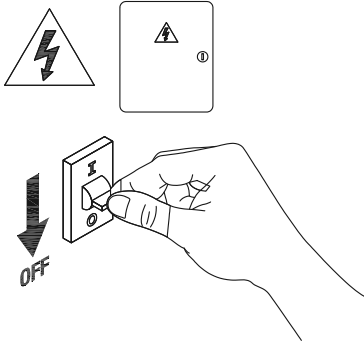


1

Turn off The Power



2

Drill 2 hole on your ceiling.

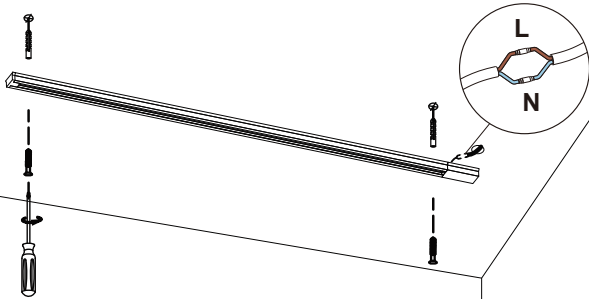


3

Install the track and connect the cable




4

Install the track light

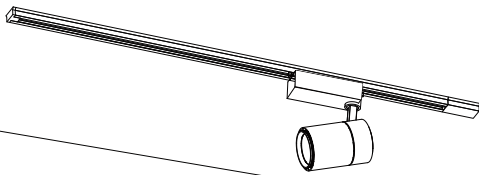

5

installaion is complete



6

Turn on the power

