




LED TRACK LIGHT

NRP-TL102COB Series
IP20




| Item Code | P (W) | CCT (K) | Displacement Factor | Output (lm) | lm/w | Color | Dimensions in mm | | | kg |
|-----------------|-------|---------|---------------------|-------------|------|-------------|------------------|-----|-----|------|
| | | | | | | | A | B | C | |
| NRP-TL102COB-10 | 10 | 3000 | ≥0.8 | 650 | 65 | White/Black | 124 | Φ63 | 187 | 0.35 |
| NRP-TL102COB-10 | 10 | 4000 | ≥0.8 | 710 | 71 | White/Black | 124 | Φ63 | 187 | 0.35 |
| NRP-TL102COB-20 | 20 | 3000 | ≥0.8 | 1600 | 80 | White/Black | 146 | Φ85 | 202 | 0.54 |
| NRP-TL102COB-20 | 20 | 4000 | ≥0.8 | 1600 | 80 | White/Black | 146 | Φ85 | 202 | 0.54 |
| NRP-TL102COB-30 | 30 | 3000 | ≥0.9 | 2220 | 74 | White/Black | 177 | Φ95 | 230 | 0.73 |
| NRP-TL102COB-30 | 30 | 4000 | ≥0.9 | 2190 | 73 | White/Black | 177 | Φ95 | 230 | 0.73 |


Dimensions in mm

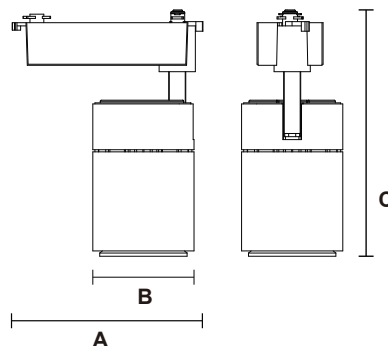


TrackKer

| Item Code | Color | Dimensions in mm | | |  |
|------------------|-------|------------------|----|----|---|
| | | A | B | C | |
| NRP-TL110-1-M-W | White | 1000 | 34 | 20 | 0.41 |
| NRP-TL110-1-M-BK | Black | 1000 | 34 | 20 | 0.41 |
| NRP-TL110-2-M-W | White | 2000 | 34 | 20 | 0.84 |
| NRP-TL110-2-M-BK | Black | 2000 | 34 | 20 | 0.84 |
| NRP-TL110-3-M-W | White | 3000 | 34 | 20 | 1.25 |
| NRP-TL110-3-M-BK | Black | 3000 | 34 | 20 | 1.25 |


Dimensions in mm


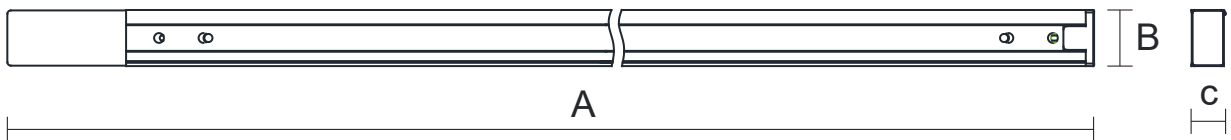


TrackKer Connect

| Item Code | Color | Dimensions in mm | |  |
|--------------------|-------|------------------|----|---|
| | | A | B | |
| NRP-TL120-90-W | White | 66 | 66 | 0.03 |
| NRP-TL120-90-BK | Black | 66 | 66 | 0.03 |
| NRP-TL120-180-W | White | 95 | 36 | 0.06 |
| NRP-TL120-180-BK | Black | 95 | 36 | 0.06 |
| NRP-TL120-T-W | White | 95 | 66 | 0.08 |
| NRP-TL120-T-BK | Black | 95 | 66 | 0.08 |
| NRP-TL120-CROSS-W | White | 95 | 95 | 0.10 |
| NRP-TL120-CROSS-BK | Black | 95 | 95 | 0.10 |

Dimensions in mm

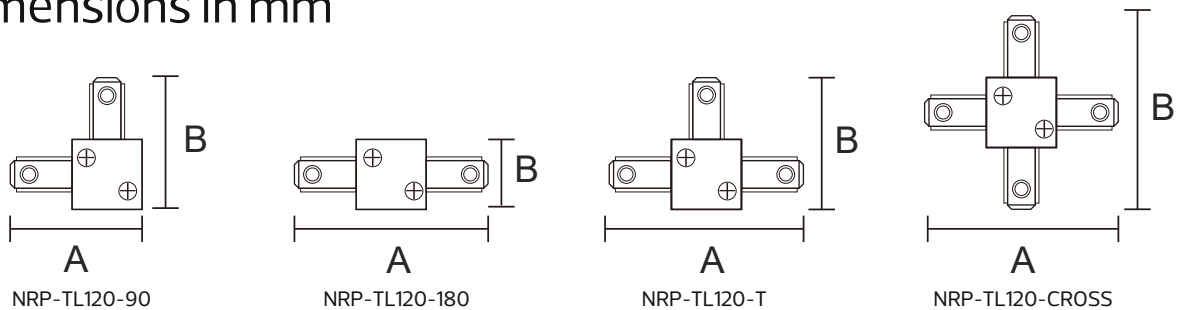

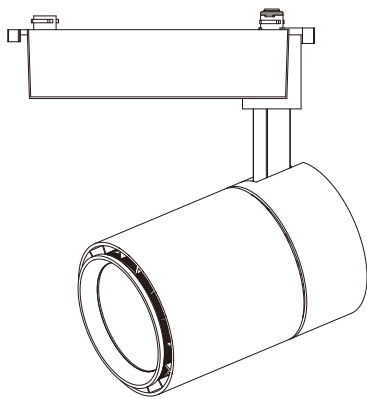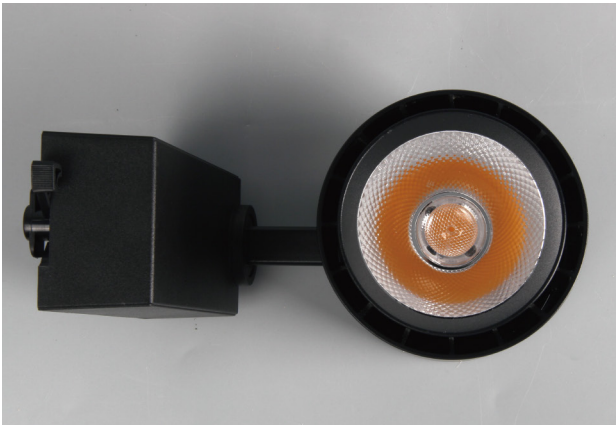

Description:

LED Track Light

Main material:


Aluminum+Engineering plastics

Specification


Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps High quality light, high color rendering, less heat, no UV or IR radiation LED driver is included IP20

Applications


- . Shoping mall
- . Office buildings
- . Exhibition hall

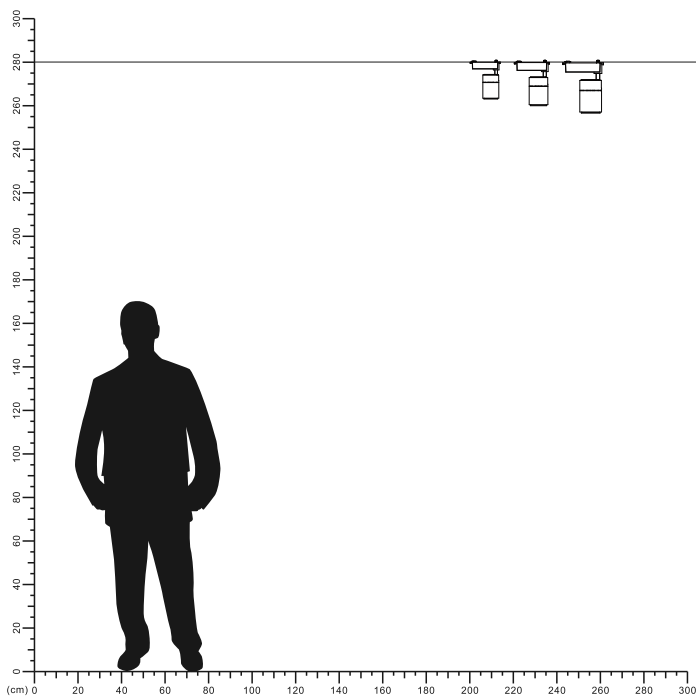

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

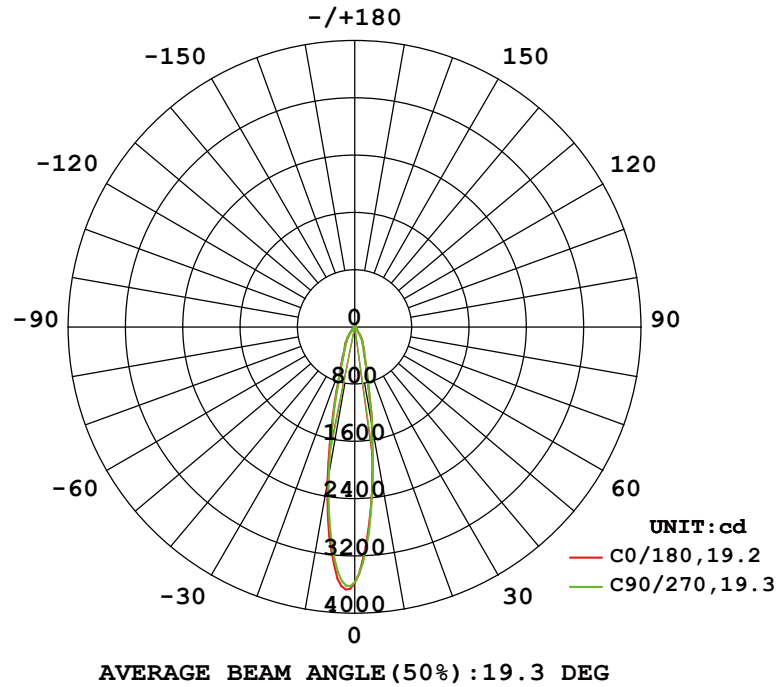


Illuminance at a Distance

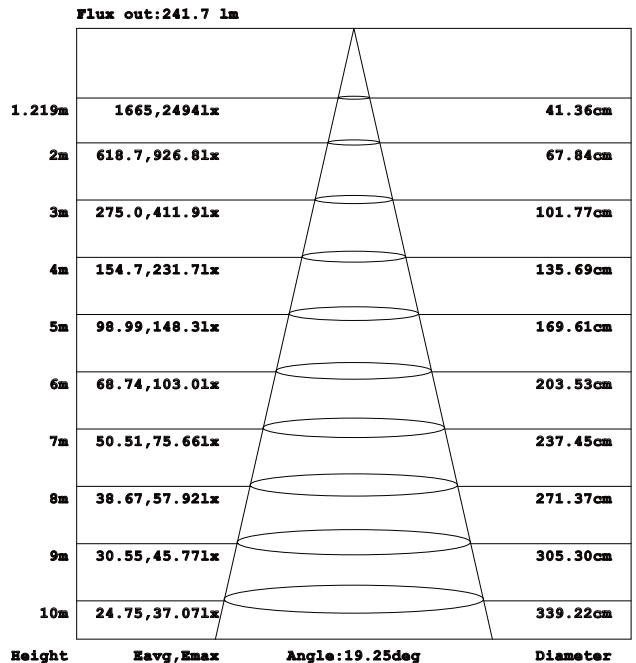


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code: NRP-TL102COB-10

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

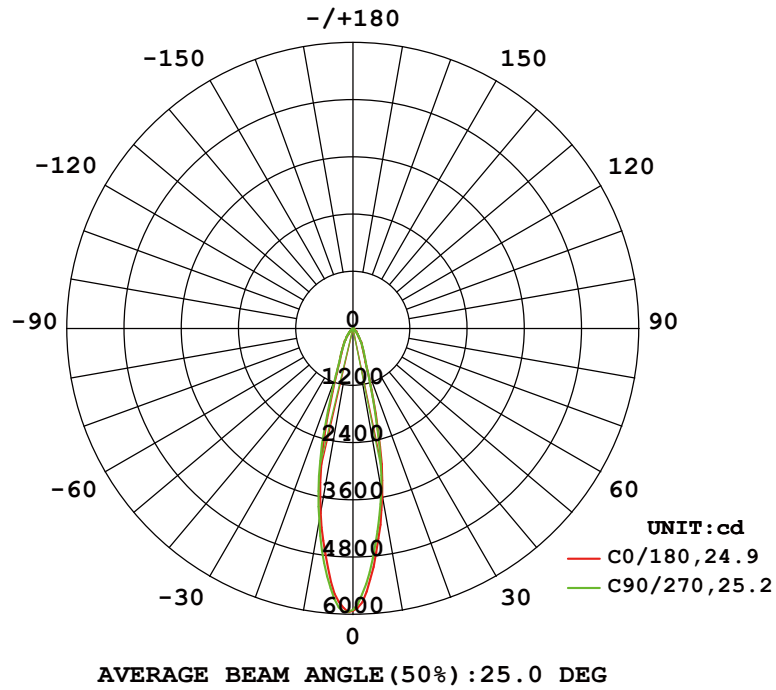


Illuminance at a Distance

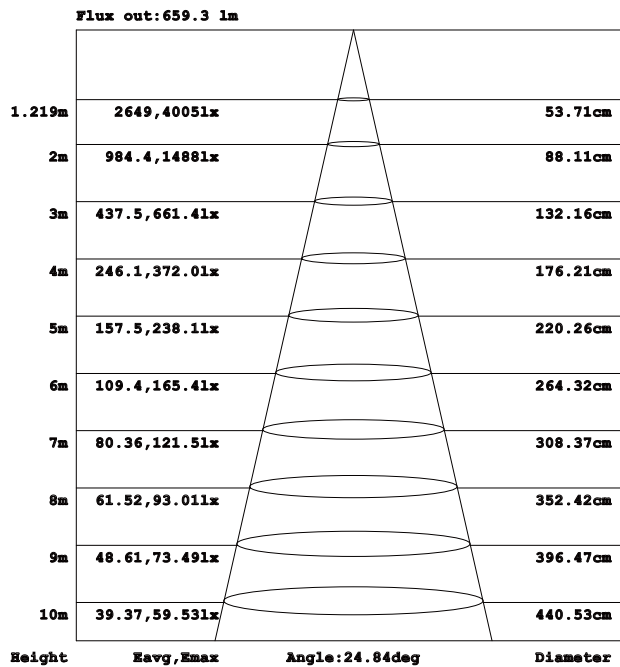


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code: NRP-TL102COB-20

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

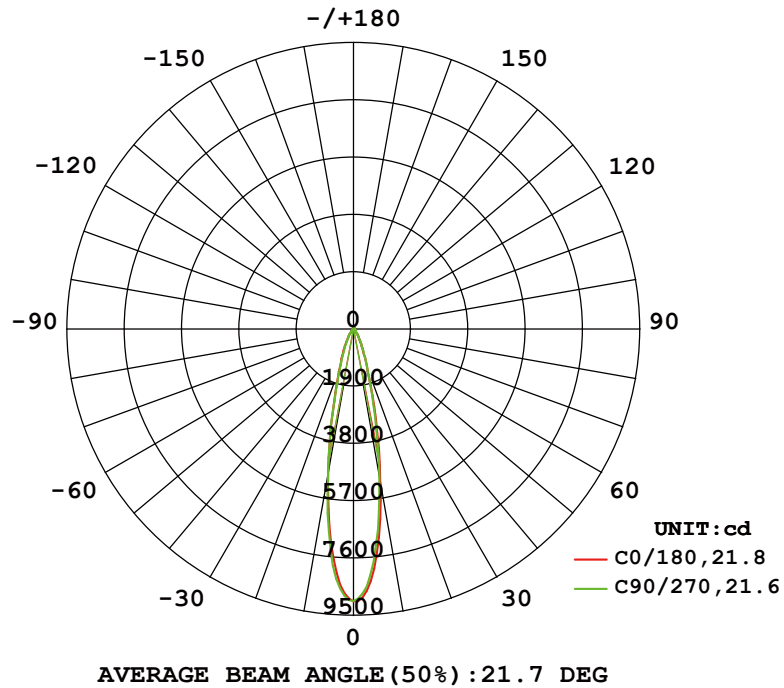

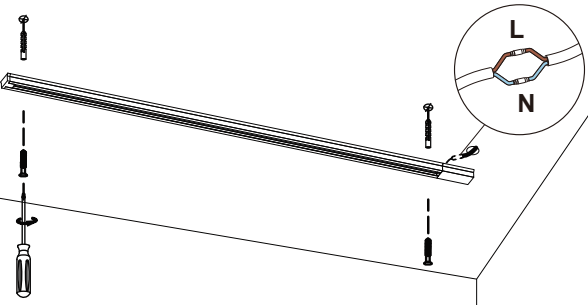
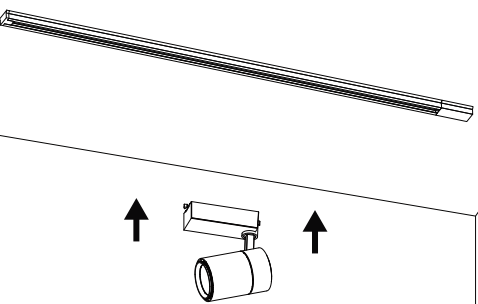
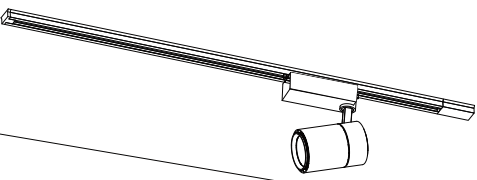
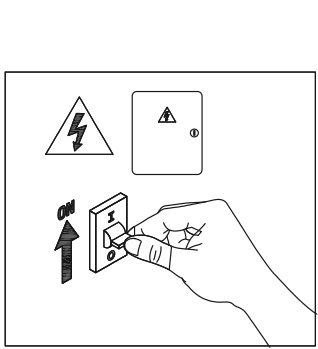


Illuminance at a Distance

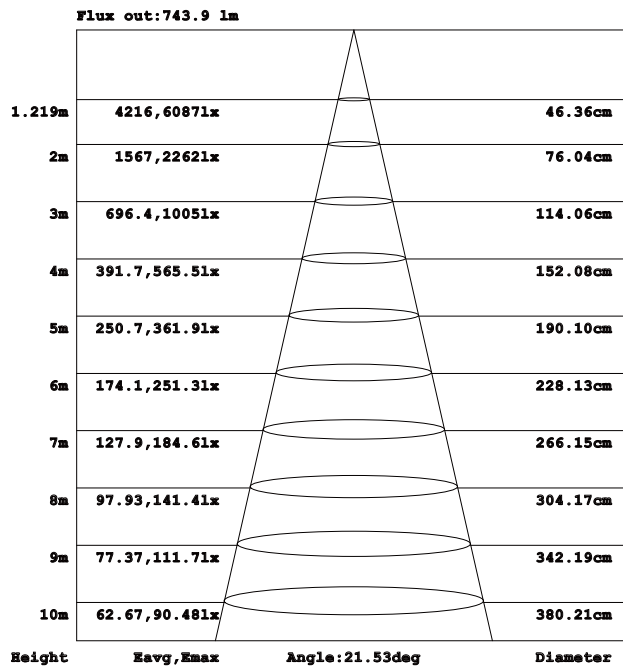

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code: NRP-TL102COB-30
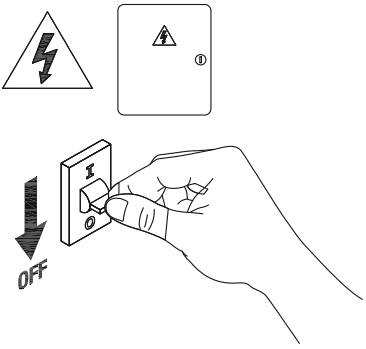
| | |
|--|--|
|  <p>1 Turn off The Power</p> |  <p>2 Drill 2 hole on your ceiling.</p> |
|  <p>3 Install the track and connect the cable</p> |  <p>4 Install the track light</p> |
|  <p>5 installation is complete</p> |  <p>6 Turn on the power</p> |

