

# SABA


SMALL SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°C	90% HUMIDITY	VOLTAGE SURGE RESISTANT
<b>INDOOR &amp; OUTDOOR USE</b>		

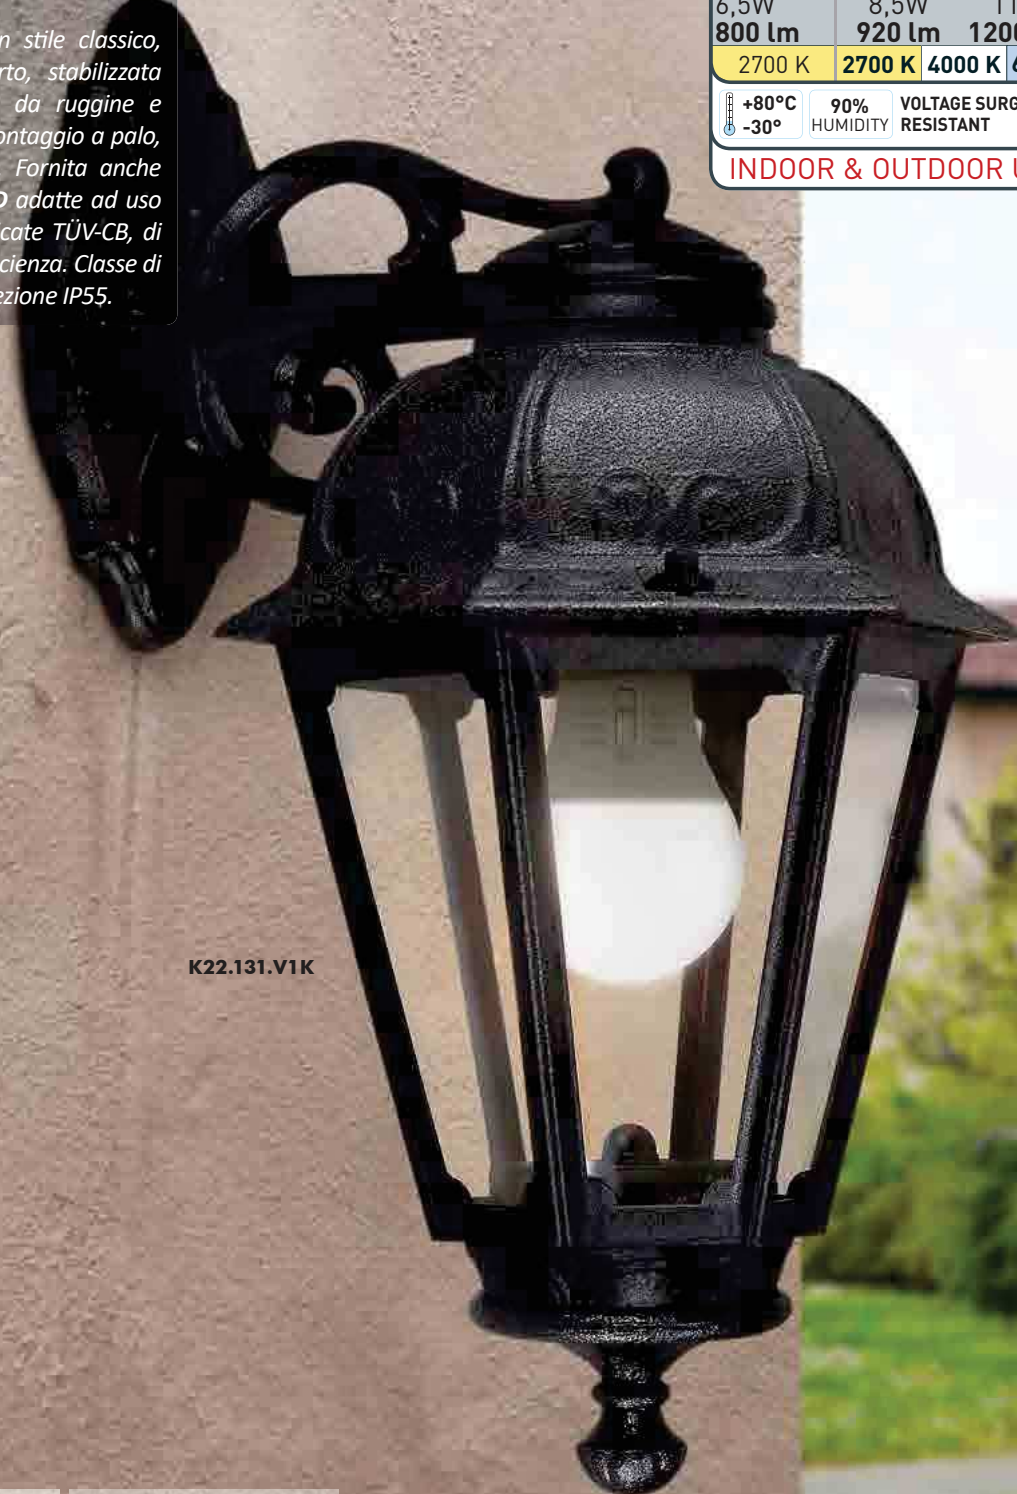

K22.131.V1K


MADE IN ITALY



COMPANY  
SOLAR  
UP&DOWN  
DOWNLIGHT  
IN-GROUND  
BRICKLIGHT  
FLOODLIGHT  
BOLLARD  
BULKHEAD  
GARDEN  
URBAN CLASSIC  
URBAN MODERN  
POST  
LAMPS  
REFERENCES

**SABA - LANTERN COMPONENTS**

**IP55**



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

**PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

**TETTO** realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

**DIFFUSER** made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

**DIFFUSORE** in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

**CAGE** made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

**GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

**SABA**

K22.000 \*



220



320

Ø 60

**Dimensions and weight**

Height: 320 mm  
Width: 220 mm  
Depth: 192 mm  
Weight: 1 Kg

**Moulded colours:**

Black  White

**Painted colours:**

Antique green  Antique bronze

**Diffuser PMMA:**

Clear  Opal

**E27 FILAMENT**



- Perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

**E27 CCT SET(\*)**



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

**100 - 240 V**

\*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm		<b>E27</b> lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
	<b>6,5W</b>	<b>800 lm</b>	<b>2700 K</b>	.F1R
	<b>8,5 W</b>	<b>920 lm</b>	6500 K	.V1K
			4000 K	
			2700 K	

**6,5W filament** = **60W** incandescent

**8,5W CCT**

**SAVE up to 89%**


**LED LAMPS**



LVD EMC ERP


Comply with:EU2019/2015  
EU2019/2020  
Technical details on page 596.

**CCT SETTABLE LED LAMP(\*)**



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

**PHOTOMETRIC DATA SAMPLE**

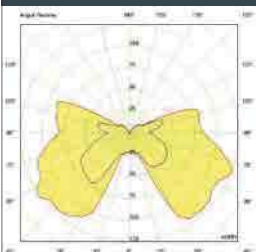

**SABA lantern clear with Fumagalli Filament Led Lamp 6,5W.**

**POST** height 1mt  
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

\* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE




**SABA**

SMALL SIZE



K22.131.F1R

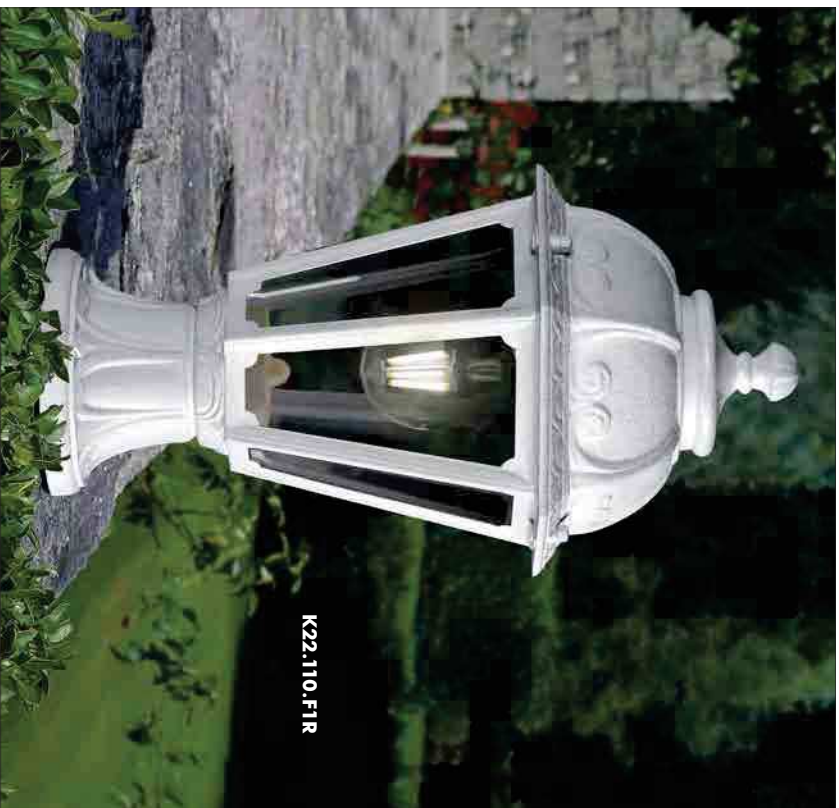

K22.110.F1R



K22.120.V1K



BISSO/SABA	
<b>E27</b> lampholder	K22.131.E27
<b>6,5W</b> filament	K22.131.F1R
<b>8,5W</b> CCT set	K22.131.V1K
Pcs 18 Kg 21,2 mc 0,209	

SICHEM/SABA	
<b>E27</b> lampholder	K22.120.E27
<b>6,5W</b> filament	K22.120.F1R
<b>8,5W</b> CCT set	K22.120.V1K
Pcs 18 Kg 21,2 mc 0,209	

SABA	
K22.000	
Pcs 1 Kg 1 mc 0,011	

MIKROLOT/SABA	
<b>E27</b> lampholder	K22.110.E27
<b>6,5W</b> filament	K22.110.F1R
<b>8,5W</b> CCT set	K22.110.V1K
Pcs 18 Kg 21,2 mc 0,209	

PORPORA/SABA	
<b>E27</b> lampholder	K22.141.E27
<b>6,5W</b> filament	K22.141.F1R
<b>8,5W</b> CCT set	K22.141.V1K
Pcs 1 Kg 3,5 mc 0,024	

MIZAR/SABA resin	
<b>E27</b> lampholder	K22.151.E27
<b>6,5W</b> filament	K22.151.F1R
<b>8,5W</b> CCT set	K22.151.V1K
Pcs 1 Kg 2,4 mc 0,044	

ALOE'.R/SABA resin	
<b>E27</b> lampholder	K22.163.E27
<b>6,5W</b> filament	K22.163.F1R
<b>8,5W</b> CCT set	K22.163.V1K
Pcs 2 Kg 8 mc 0,121	

ARTU'/SABA	
<b>E27</b> lampholder	K22.158.E27
<b>6,5W</b> filament	K22.158.F1R
<b>8,5W</b> CCT set	K22.158.V1K
Pcs 1 Kg 9 mc 0,148	



**SABA**

SMALL SIZE





**ARTU' BISSO/SABA 2+1**

<b>E27</b> lampholder	K22.158.S21.E27
<b>6,5W</b> filament	K22.158.S21.F1R
<b>8,5W</b> CCT set	K22.158.S21.V1K

Pcs 1  
Kg 12,1  
mc 0,176

**ARTU' BISSO/SABA 3+1**

<b>E27</b> lampholder	K22.158.S31.E27
<b>6,5W</b> filament	K22.158.S31.F1R
<b>8,5W</b> CCT set	K22.158.S31.V1K

Pcs 1  
Kg 13,1  
mc 0,176

**GIGI BISSO/SABA 2+1**

<b>E27</b> lampholder	K22.156.S21.E27
<b>6,5W</b> filament	K22.156.S21.F1R
<b>8,5W</b> CCT set	K22.156.S21.V1K

Pcs 1  
Kg 14,1  
mc 0,182

**GIGI BISSO/SABA 3+1**

<b>E27</b> lampholder	K22.156.S31.E27
<b>6,5W</b> filament	K22.156.S31.F1R
<b>8,5W</b> CCT set	K22.156.S31.V1K

Pcs 1  
Kg 15,1  
mc 0,182

**ARTU' BISSO/SABA 2L**

<b>E27</b> lampholder	K22.158.S20.E27
<b>6,5W</b> filament	K22.158.S20.F1R
<b>8,5W</b> CCT set	K22.158.S20.V1K

Pcs 1  
Kg 11,1  
mc 0,176

**ARTU' BISSO/SABA 3L**

<b>E27</b> lampholder	K22.158.S30.E27
<b>6,5W</b> filament	K22.158.S30.F1R
<b>8,5W</b> CCT set	K22.158.S30.V1K

Pcs 1  
Kg 12,1  
mc 0,176

**GIGI BISSO/SABA 2L**

<b>E27</b> lampholder	K22.156.S20.E27
<b>6,5W</b> filament	K22.156.S20.F1R
<b>8,5W</b> CCT set	K22.156.S20.V1K

Pcs 1  
Kg 13,1  
mc 0,182

**GIGI BISSO/SABA 3L**

<b>E27</b> lampholder	K22.156.S30.E27
<b>6,5W</b> filament	K22.156.S30.F1R
<b>8,5W</b> CCT set	K22.156.S30.V1K

Pcs 1  
Kg 14,1  
mc 0,182