

Curtain Switch

T-series

Technical specification

Electrical:

Input Voltage: AC250V~50/60Hz

Rated Current:
10 amps - no derating when used on fluorescent or inductive loads

Cable Size:

4x1mm²
4x1.5mm²
3x2.5mm²
2x4mm²
1x6mm²

Contact gap:
3mm switch contact gap

Physical:

Operating Temperature: -5°C~50°C

IP Rated: IP20

Max Installation Altitude: ≤2000M


Operational Testing:

Tested to 100,000 operations for mechanical life
Tested to 40,000 operations at 10 ampere rating

Description


The curtain switch is widely used in homes, offices, hotels, and other places, providing manual control of curtain opening and closing. Users can easily and conveniently control the curtain's open or closed status by manually operating the switch button. Whether it is for privacy protection, or enhancing interior decoration, the curtain switch can meet the basic needs of users.

Model: T1117

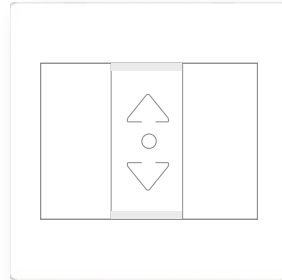


VGA Socket

Dimensions(mm)

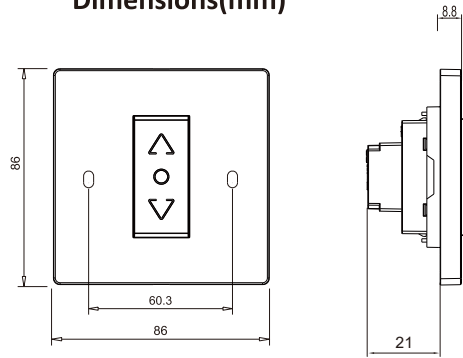

Wiring Diagrams

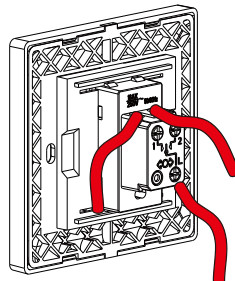

Product Material

NO.	Name	Material	Specifications	Technical characteristics
1.	Surface frame	PC	SABIC GE	Can use in ocean weather and high temperature up to 130 celsius degree. PC material VO flaming retarding. Strong hygroscopicity, excellent strength and durability
2.	Rocker	PC		
3.	Slider	PA	Nylon	
4.	Platen	PA		Silver thickness 0.6mm, silver contact diameter 4.0mm, thickness 1.5mm, contact surface big. Improve the silver contact arc extinguishing performance, reduce the electrical wear. Maintain low contact resistance
5.	Silver Contact Part	Silver	Silver & Copper composite	
6.	Copper Slider	Brass	Phosphor Copper	
7.	Spacer	PA		Big copper connector 2.8 gram, moisture resistance and stand wear and tear. Difficult to make electrical spark, our products can use in the moist weather
8.	Wire terminal	Brass	59 Copper particles	
9.	Wire terminal	Brass		
10.	Screw	Iron	Carbon Steel	4*6.5mm screw, make the cable very fastness, surface gold-plating, prevent oxidation, improve the electrical conductivity
11.	Plastic fixing part	PA		
12.	Base	PA		
13.	Middle frame	PC		

