





# TOMMY

## FLOODLIGHT



LED floodlight with single or double lights made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings, in the ground or on spikes. Square, ring or eyelid cover versions available with no visible screws. Supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. The floodlight is fully adjustable and it can tilt and turn at will. Insulation class II, Protection rating IP66.

*Proiettore a LED a luce singola o doppia fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto, al suolo o su picchetto, sia in ambienti esterni che interni. Cover quadrata, ad anello o a palpebra senza viti a vista. Fornito con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB di lunga durata ed elevata efficienza. Il proiettore è completamente regolabile e si può inclinare e orientare a piacimento. Classe di isolamento II, grado di protezione IP66.*



2M1.001.D1K




**CCT SETTABLE**

3000 K 4000 K 6500 K

SDCM <6

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

MADE IN ITALY

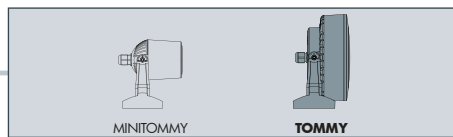

**TOMMY - COMPONENTS**

IP 66




**COVER** with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Ring or eyelid versions available.

**COVER** senza viti a vista in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Disponibile nella versione ad anello o a palpebra.

**DIFFUSER** made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

**DIFFUSORE** in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.



Resin **BODY** suitable for the electrical devices fixation and resin **SUPPORT FORK** to allow a fully adjustable floodlight position.

**CORPO** in resina predisposto per il fissaggio degli accessori elettrici e **FORCELLA** di supporto per permettere l'orientamento del proiettore.

**INSTALLATION ELEMENTS:**

- ROTATION DISK for surface installation.
- SPIKE for in ground installation.
- CONNECTION FITTING for double lights version.

**ELEMENTI DI FISSAGGIO:**

- DISCO DI ROTAZIONE per l'installazione a parete.
- PICCHETTO per l'installazione nel terreno.
- SUPPORTO per la versione a luce doppia.

**TOMMY**



**Dimensions and weight**

Height: 165 mm  
Width: 152 mm  
Weight: 0,8 Kg

**Moulded Colours:**

Black Grey White

**Diffuser PC:**

Frosted  
Blue Green Orange

**LED LAMPS**



Comply with: EU2019/2015  
EU2019/2020  
Technical details on page 596.

**GX53 LED**

**100 - 240 V**



| LAMP | POWER       | LUMINOUS FLUX (Φ TOTAL) UP TO | COLOUR TEMP. | *ADD. SUFFIX |
|------|-------------|-------------------------------|--------------|--------------|
|      | <b>3 W</b>  | <b>410 lm</b>                 | 6500 K       | .G1K         |
|      |             |                               | 4000 K       |              |
|      |             |                               | 3000 K       |              |
|      | <b>10 W</b> | <b>1290 Lm</b>                | 6500 K       | .D1K         |
|      |             |                               | 4000 K       |              |
|      |             |                               | 3000 K       |              |


Floodlight supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

**3W** = **40W**  
**410 Lm** = incandescent  
**SAVE 93%**

**10W** = **100W**  
**1290 Lm** = incandescent  
**SAVE 90%**

**CCT SETTABLE LED LAMP**



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

\* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE




**TOMMY**  
FLOODLIGHT



2M1.000.D1 K



4M1.001.AUD2K

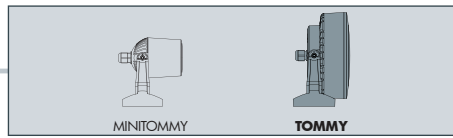

| TOMMY      |             |
|------------|-------------|
| <b>3W</b>  | 2M1.000.G1K |
| <b>10W</b> | 2M1.000.D1K |

CCT SETTABLE GX53 LED LAMP INCLUDED  
3000K/4000K/6500K

Pcs 18  
Kg 15,3  
mc 0,092

| TOMMY SPIKE |             |
|-------------|-------------|
| <b>3W</b>   | 2M1.001.G1K |
| <b>10W</b>  | 2M1.001.D1K |

CCT SETTABLE GX53 LED LAMP INCLUDED  
3000K/4000K/6500K

Pcs 18  
Kg 16  
mc 0,092

| TOMMY 2L     |             |
|--------------|-------------|
| <b>2x3W</b>  | 4M1.000.G2K |
| <b>2x10W</b> | 4M1.000.D2K |

2 CCT SETTABLE GX53 LED LAMPS INCLUDED  
3000K/4000K/6500K

Pcs 8  
Kg 13,9  
mc 0,092

| TOMMY 2L SPIKE |             |
|----------------|-------------|
| <b>2x3W</b>    | 4M1.001.G2K |
| <b>2x10W</b>   | 4M1.001.D2K |

2 CCT SETTABLE GX53 LED LAMPS INCLUDED  
3000K/4000K/6500K

Pcs 8  
Kg 14,2  
mc 0,092