DURACELL®
LED

ECO PLUS

Powerful.
Economical.
Sustainable.

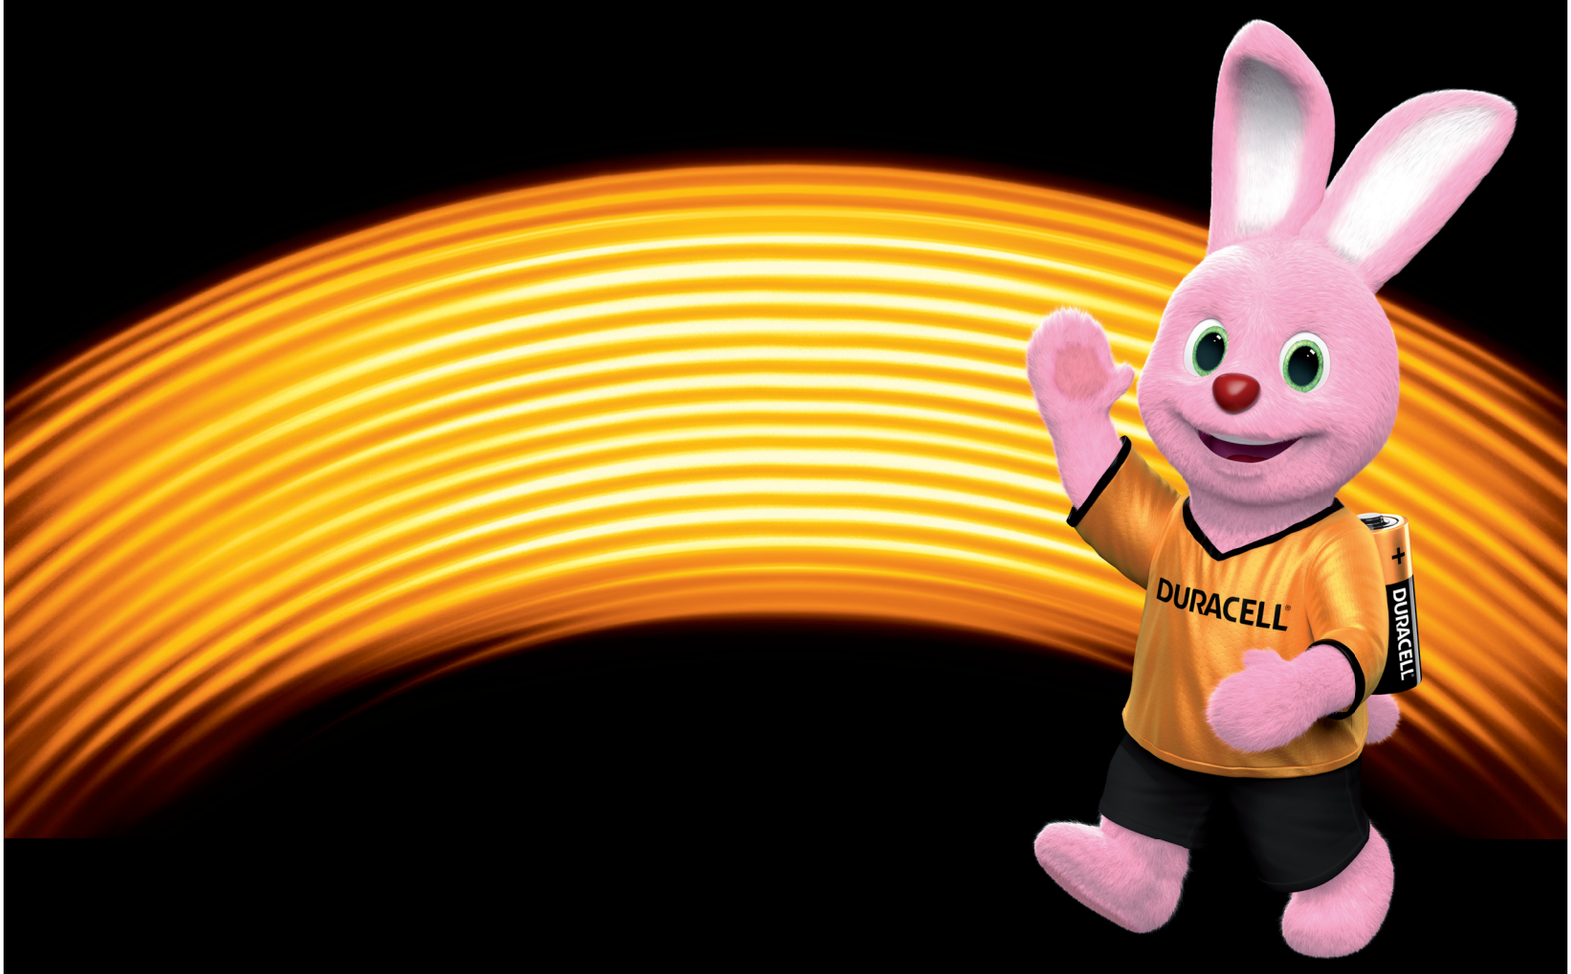

Consumer Line

- 15,000 hours runtime
- Modern filament LED lights

- 15.000 Stunden Laufzeit
- Moderne Filament-LED Leuchten

- 15.000 heures d‘autonomie
- Lumières à incandescence LED modernes

Commercial Line

- 25,000 hours runtime
- dimmable LED lights

- 25.000 Stunden Laufzeit
- dimmbare LED Leuchten

- 25.000 heures d‘autonomie
- Lumières LED à intensité réglable

Consumer Line

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
A100N27	E27	470	5.6	40	2 700K	240°	-	ø60 h110mm	15 000h
A110N27	E27	806	9.5	60	2 700K	230°	-	ø60 h110mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
A120N27	E27	1 060	11.5	75	2 700K	240°	-	ø60 h120mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
A130N27	E27	1 521	14.5	100	2 700K	220°	-	ø60 h120mm	15 000h

Available color temperature:
Erhältliche Farbtemperaturen:
Températures de couleur:
2 700K 3 000K 4 000K 6 500K

Available as cardbox, blister and multi-pack.
Erhältlich als Karton, Blister und Multi-Pack.
Disponible en carton, blister et multi-pack.

Duracell® ECO Plus lamps are not dimmable.

DURACELL® SOLAR

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
C100N14	E14	250	3.4	25	2 700K	280°	-	ø35 h102mm	15 000h
C100N27	E27	250	3.4	25	2 700K	280°	-	ø35 h98mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
C110N14	E14	470	5.4	40	2 700K	280°	-	ø35 h105mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
M100N14	E14	250	3.4	25	2 700K	240°	-	ø45 h78mm	15 000h
M100N27	E27	250	3.4	25	2 700K	240°	-	ø45 h74mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
M110N14	E14	470	5.4	40	2 700K	200°	-	ø45 h78mm	15 000h
M110N27	E27	470	5.9	40	2 700K	200°	-	ø45 h78mm	15 000h

Consumer Line

Model Model Modèle	Socket Sockel Douille	Lumen	Candela	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
S100N10	GU10	240	570cd	3.6	35	3 000K	36°	-	ø50 h54mm	15 000h
S100N16	GU5.3	245	620cd	3.3	24	3 000K	36°	-	ø50 h45mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Candela	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
S110N10	GU10	345	875cd	5	50	3 000K	36°	-	ø50 h54mm	15 000h
S110N16	GU5.3	345	820cd	5	35	3 000K	36°	-	ø50 h45mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Candela	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
S120N10	GU10	420	920cd	6.1	60	3 000K	36°	-	ø50 h54mm	15 000h

Available color temperature:
Erhältliche Farbtemperaturen:
Températures de couleur:
3 000K
6 500K

Available as cardbox, blister and multi-pack.
Erhältlich als Karton, Blister und Multi-Pack.
Disponible en carton, blister et multi-pack.

Duracell® ECO Plus lamps are not dimmable.

DURACELL® SOLAR

DURACELL SOLAR

Commercial Line

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
A200N27	E27	470	5.6	40	2 700K	240°	-	ø60 h110mm	25 000h
A200D27	E27	470	6.3	40	2 700K	240°	◠	ø60 h110mm	25 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
A210N27	E27	806	9.2	60	2 700K	240°	-	ø60 h110mm	25 000h
A210D27	E27	806	9	60	2 700K	240°	◠	ø60 h110mm	25 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
A220N27	E27	1 060	11.6	75	2 700K	180°	-	ø60 h110mm	25 000h
A220D27	E27	1 060	13	75	2 700K	180°	◠	ø60 h117mm	25 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
A230N27	E27	1 521	12.5	100	2 700K	140°	-	ø60 h117mm	25 000h
A230D27	E27	1 521	14	100	2 700K	140°	◠	ø60 h117mm	25 000h

Available color temperature:
Erhältliche Farbtemperaturen:
Températures de couleur:

2 700K 3 000K 4 000K 6 500K

Available as cardbox, blister and multi-pack.
Erhältlich als Karton, Blister und Multi-Pack.
Disponible en carton, blister et multi-pack.

DURACELL SOLAR

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	equal watt vergleichbar equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
C200N14	E14	250	3.4	25	2 700K	280°	-	ø35 h102mm	25 000h
C200N27	E27	250	3.4	25	2 700K	280°	-	ø35 h98mm	25 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
C210N14	E14	470	5.9	40	2 700K	280°	-	ø38 h110mm	25 000h
C210D14	E14	470	6.2	40	2 700K	280°	◠	ø38 h110mm	25 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
M200N14	E14	250	3.4	25	2 700K	210°	-	ø45 h78mm	25 000h
M200N27	E27	250	3.4	25	2 700K	210°	-	ø45 h74mm	25 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
M210N14	E14	470	5.9	40	2 700K	160°	-	ø45 h81mm	25 000h
M210N27	E27	470	5.9	40	2 700K	160°	-	ø45 h78mm	25 000h
M210D14	E14	470	6.2	40	2 700K	160°	◠	ø45 h81mm	25 000h
M210D27	E27	470	6.2	40	2 700K	160°	◠	ø45 h78mm	25 000h

Commercial Line

Model Model Modèle	Socket Sockel Douille	Lumen	Candela	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
S200N10	GU10	230	600cd	3	35	3 000K	36°	-	ø50 h54mm	25 000h
S200D10	GU10	230	700cd	3.5	35	3 000K	36°	◠	ø50 h54mm	25 000h
S200N16	GU5.3	250	650cd	3.7	25	3 000K	36°	-	ø50 h46mm	25 000h
S210N16	GU5.3	350	900cd	5	35	3 000K	36°	-	ø50 h46mm	25 000h
S210D10	GU10	345	950cd	5.1	50	3 000K	36°	◠	ø50 h54mm	25 000h
S210N10	GU10	345	950cd	4.8	50	3 000K	36°	-	ø50 h54mm	25 000h
S220D10	GU10	425	1 200cd	5.3	60	3 000K	36°	◠	ø50 h54mm	25 000h
S220N10	GU10	430	1 100cd	5	60	3 000K	36°	-	ø50 h54mm	25 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Candela	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
S300N10	GU10	250	650cd	3.5	35	3 000K	36°	-	ø50 h54mm	25 000h
S300N16	GU5.3	250	650cd	3.7	25	3 000K	36°	-	ø50 h46mm	25 000h
S310N10	GU10	345	950cd	4.8	50	3 000K	36°	-	ø50 h54mm	25 000h
S310D10	GU10	345	950cd	5.1	50	3 000K	36°	◠	ø50 h54mm	25 000h
S310N16	GU5.3	350	900cd	5	35	3 000K	36°	-	ø50 h46mm	25 000h

Available color temperature:
Erhältliche Farbtemperaturen:
Températures de couleur:

3 000K 6 500K

Available as cardbox, blister and multi-pack.
Erhältlich als Karton, Blister und Multi-Pack.
Disponible en carton, blister et multi-pack.

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
G200N27	E27	806	9	60	2 700K	250°	-	ø95 h126mm	25 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
R200N14	E14	450	6	60	2 700K	110°	-	ø50 h85mm	25 000h
R210N27	E27	620	9.5	70	2 700K	110°	-	ø63 h103mm	25 000h
R215N27	E27	850	10	90	3 000K	110°	-	ø80 h114mm	25 000h
R225N27	E27	1 260	14	120	3 000K	25°	-	ø121 h136mm	25 000h

Available color temperature:
Erhältliche Farbtemperaturen:
Températures de couleur:

2 700K 3 000K 4 000K 6 500K

Available as cardbox, blister and multi-pack.
Erhältlich als Karton, Blister und Multi-Pack.
Disponible en carton, blister et multi-pack.

Filaments

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
A150N27	E27	470	4.3	40	2 700K	320°	-	ø60 h106mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
A160N27	E27	806	6.2	60	2 700K	320°	-	ø60 h106mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
C150N14	E14	250	2.4	25	2 700K	320°	-	ø35 h98mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
C160N14	E14	450	4	40	2 700K	320°	-	ø35 h98mm	15 000h

Available as cardbox, blister and multi-pack.
Erhältlich als Karton, Blister und Multi-Pack.
Disponible en carton, blister et multi-pack.

Duracell® Filament lamps are not dimmable.

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
M150	E14	250	2.4	25	2 700K	320°	-	ø45 h78mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
M160	E14	450	4	40	2 700K	320°	-	ø45 h78mm	15 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Candela	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
S150N10	GU10	230	460cd	3.3	35	3 000K	36°	-	ø50 h54mm	25 000h

Model Model Modèle	Socket Sockel Douille	Lumen	Candela	Watt	Equal watt Vergleichbar Equivalence	Kelvin	Beam Angle Strahlungswinkel Angle de faisceau	Dimmable Dimmbar	Dimensions Maße	Lifetime Lebenszeit Durée de vie
S160N10	GU10	345	610cd	4	50	3 000K	36°	-	ø50 h54mm	25 000h

Floor Display

Aufsteller/Displays

DU-PDQ-DISP

DU-FLOOR-DISP

Counter Metal Display

DU-COUNTER-DISP

Global Catalog

DURACELL® SOLAR

Solar Landscape

Pathway Lights 2

Spotlights 20

Decorative & Specialty Lights 30

Motion Security Lights 35

Solar Accessories

Batteries 38

Shipping Information

Containerization 43

Notes 50

Key

***** – EMEA

Packaging Types

X = number

XX or X**PK**X– Colorbox

TXX – Tray pack (including hang tag)

WX – Colorbox with window/handle

SX – Colorbox with handle

Country Codes

NA – North America

AP – Asia Pacific

EMEA – Europe, Middle East, Africa

Product Dimensions

All product height measurements include ground spike

Ø – Diameter

Packaging Types

Colorbox

Colorbox w/ window/handle

Tray pack

Battery pack

Solar Landscape
Pathway Lights

CS6Ma-R5-BK-8

Lumens	5 lm
Color Temperature	3000–3500K
Runtime	Up to 8 hours
Finish	Black
Construction	Metal
Lens	Ribbed glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	3.6 x 3.3 x 18.4 in 9.2 x 8.3 x 46.6 cm
Pack Size	8
Pack Type	Colorbox
Regions Sold	NA
Warranty	1 year

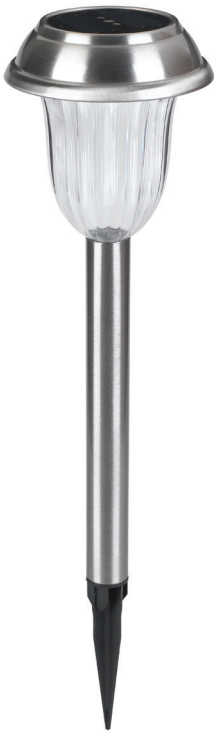

MS16Mn-R5-SS-4/T15
GL010NP4DU* / GL010NT15DU*

Lumens	5 lm
Color Temperature	4600–5600K / 3800-4800K*
Runtime	Up to 8 hours
Finish	Stainless steel
Construction	Metal
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	3.9 (ø) x 15.1 in 10.0 (ø) x 38.3 cm
Pack Size	4 / 15
Pack Type	Colorbox (4) Tray + hangtag (15)
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

QM5Pd-P2-BK-2
GL043BP2DU*

Lumens	15 / 6 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Black
Construction	Plastic
Lens	Seeded glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 400 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	5.5 x 5.5 x 19.4 in 14 x 14 x 49.3 cm
Pack Size	2
Pack Type	Colorbox
Regions Sold	NA, AP
Warranty	1 year

QS59P-K5X-BK-2

Lumens	5 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Black
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 300 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	7.4 x 7.4 x 23.7 18.8 x 18.8 x 60.3 cm
Pack Size	2
Pack Type	Colorbox
Regions Sold	NA, AP
Warranty	1 year

QS6Pb-R6-BK-T9
GLO42BT9DU*

Lumens	6 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Black
Construction	Plastic
Lens	Ribbed glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 1200 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	4.4 x 4.4 x 15.2 in 11.2 x 11.2 x 38.7 cm
Pack Size	9
Pack Type	Tray + hangtag
Regions Sold	NA, AP
Warranty	1 year

QS7Ma-R5-SS-W4/T6
GLO04NP4DU* / GLO04NT6DU*

Lumens	5 lm
Color Temperature	4600–5600K / 3800-4800K*
Runtime	Up to 8 hours
Finish	Stainless steel
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	2.2 (ø) x 15.6 in 5.7 (ø) x 39.5 cm
Pack Size	4 / 6
Pack Type	Colorbox w/ window + handle (4) Tray + hangtag (6)
Regions Sold	AP, EMEA
Warranty	1 / 2* years

SOLAR

QS7Mm-R5-SS-W4

Lumens	5 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Stainless steel
Construction	Metal
Lens	Ribbed glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	2.2 x 2.2 x 15.6 in 5.8 x 5.8 x 39.6 cm
Pack Size	4
Pack Type	Colorbox w/ window + handle
Regions Sold	AP
Warranty	1 year

Multi-Use

RCA5-P2-CB-1

GL044CBDU*

Lumens	15 / 6 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Charcoal brown
Construction	Metal
Lens	Ribbed glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 400 mAh 14430 LiFePO4
No. / Type of LEDs	2x natural white
Product Dimensions	6.6 (ø) x 38 / 6.6 (ø) x 23.1 in 16.7 (ø) x 96.4 / 16.7 (ø) x 58.6 cm
Pack Size	1
Pack Type	Colorbox
Regions Sold	NA, AP
Warranty	1 year

Multi-Use

RM5Ma-P1-PG-W2

GLO3OPGP2DU*

Lumens	7.5 / 3 lm
Color Temperature	4600–5600K / 3800-4800K*
Runtime	6 / 10 hours (w/ switch)
Finish	Pearl grey
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 250 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	6.1 (ø) x 32.8 / 5.0 (ø) x 19.9 in 15.5 (ø) x 83.4 / 12.8 (ø) x 50.5 cm
Pack Size	2
Pack Type	Colorbox w/ window + handle
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

RM5Mb-P1-PG-2

Lumens	7.5 / 3 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Pearl grey
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 250 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	6.1 (ø) x 32.8 in 15.5 (ø) x 83.4 cm
Pack Size	2
Pack Type	Colorbox
Regions Sold	NA
Warranty	2 years

RS127Mc-P1-BKT-W4
GL023BP4DU*

Lumens	7.5 / 3 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Textured black
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 250 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	5.5 (ø) x 18 in 14 (ø) x 45.6 cm
Pack Size	4
Pack Type	Colorbox w/ window + handle
Regions Sold	NA, AP
Warranty	1 year

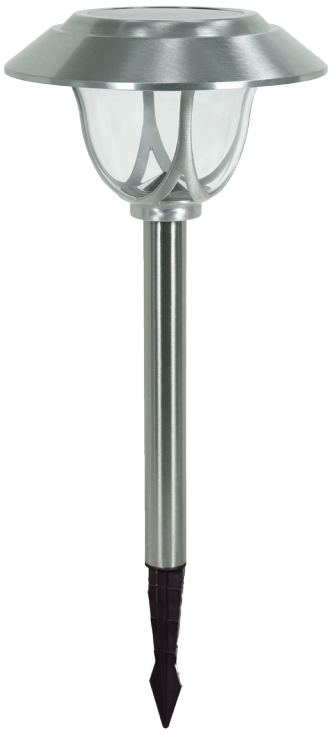

RS162Ma-P2-SS-W2
GL026NP2DU*

Lumens	15 / 6 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Stainless steel
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 400 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	7.1 (ø) x 19.0 in 18 (ø) x 48.3 cm
Pack Size	2
Pack Type	Colorbox w/ window + handle
Regions Sold	NA, AP
Warranty	1 year

RS172M-P1-SS-W4
GL024NP4DU*

Lumens	7.5 / 3 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Stainless steel
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 250 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	4 (ø) x 20.5 in 10.2 (ø) x 52.1 cm
Pack Size	4
Pack Type	Colorbox w/ window + handle
Regions Sold	NA, AP
Warranty	1 year

RS175Mc-R5-SS-T6
GL022NT6DU*

Lumens	5 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Stainless steel
Construction	Metal
Lens	Diamond-cut glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	4.8 (ø) x 20.6 in 12.2 (ø) x 52.4 cm
Pack Size	6
Pack Type	Tray + hangtag
Regions Sold	NA, AP
Warranty	1 year

RS21Mh-K8-ORB/PG/SS-M10

Lumens	8 lm
Color Temperature	2700–3200K
Runtime	Up to 8 hours
Finish	Oil-rubbed bronze / stainless steel / pearl grey
Construction	Metal
Lens	Ribbed glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	5.8 (ø) x 18 in 14.8 (ø) x 45.8 cm
Pack Size	10
Pack Type	Mailer box
Regions Sold	NA, AP
Warranty	2 years

RS220M-P3-CB-2

Lumens	30 / 22 lm
Color Temperature	2700–3200K
Runtime	6 / 10 hours (w/ switch)
Finish	Charcoal brown
Construction	Metal
Lens	Seeded glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 850 mAh 18500 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	6.6 (ø) x 22.7 in 16.7 (ø) x 57.6 cm
Pack Size	2
Pack Type	Colorbox
Regions Sold	NA, AP
Warranty	1 / 2 years

RS23M-F30-BK-T4

Lumens	30 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Black
Construction	Metal
Lens	Seeded glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 600 mAh 18500 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	7.2 (ø) x 15.6 in 18.2 (ø) x 39.2 cm
Pack Size	4
Pack Type	Tray + hangtag
Regions Sold	NA
Warranty	2 years

RS25Md-P2-BK-2
GL001BP2DU*

Lumens	15 / 6 lm
Color Temperature	3800–4800K*
Runtime	6 / 10 hours (w/ switch)
Finish	Black
Construction	Metal
Lens	Glass
Solar Panel	Amorphous silicon
Battery	1x 400 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	6.3 (ø) x 19.8 in 16 (ø) x 50.3 cm
Pack Size	2
Pack Type	Colorbox
Regions Sold	AP, EMEA
Warranty	2 years

RS26M-P4-SS-W1
GLO12NDU*

Lumens	45 / 18 lm
Color Temperature	3800–4800K
Runtime	6 / 10 hours (w/ switch)
Finish	Stainless steel
Construction	Metal
Lens	Glass
Solar Panel	Amorphous silicon
Battery	1x 1000 mAh 18500 LiFePO4
No. / Type of LEDs	2x natural white
Product Dimensions	6.6 (ø) x 20.1 in 16.8 (ø) x 51.1 cm
Pack Size	1
Pack Type	Colorbox w/ window + handle
Regions Sold	AP, EMEA
Warranty	2 years

CE

Motion-activated

RS26M-S50M-CB-2

Lumens	50 / 5 lm
Color Temperature	4600–5600K
Runtime	2 / 20 hours
Finish	Charcoal brown
Construction	Metal
Lens	Ribbed glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 600 mAh 18500 LiFePO4
No. / Type of LEDs	4x natural white
Product Dimensions	6.6 (ø) x 21.5 in 16.7 (ø) x 54.7 cm
Pack Size	2
Pack Type	Colorbox
Regions Sold	NA
Warranty	1 year

ETL LISTED

Motion-activated

RS26M-S90M-CB/SS-W1

GL013CBDU* / GL013NDU*

Lumens	90 / 9 lm
Color Temperature	4600–5600K / 3800-4800K*
Runtime	2 / 20 hours
Finish	Charcoal brown / stainless steel
Construction	Metal
Lens	Ribbed glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 1000 mAh 18500 LiFePO4
No. / Type of LEDs	4x natural white
Product Dimensions	6.6 (ø) x 21.5 in 16.7 (ø) x 54.7 cm
Pack Size	1
Pack Type	Colorbox w/ window + handle
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

RS29M-P1-SS-2

GL002NP2DU*

Lumens	7.5 / 3 lm
Color Temperature	3800–4800K*
Runtime	6 / 10 hours (w/ switch)
Finish	Stainless steel
Construction	Metal
Lens	Glass
Solar Panel	Amorphous silicon
Battery	1x 250 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	6.3 (ø) x 19.76 in 16.1 (ø) x 50.2 cm
Pack Size	2
Pack Type	Colorbox
Regions Sold	AP, EMEA
Warranty	1 / 2* years

RS2Pb-R5-DB-T6
GL021BT6DU*

Lumens	5 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Dark brown
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	5 (ø) x 16.9 in 12.7 (ø) x 42.9 cm
Pack Size	6
Pack Type	Tray + hangtag
Regions Sold	NA, AP
Warranty	1 year

RS2Pc-K5-BK-4

Lumens	5 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Black
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 700 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	5 (ø) x 17.7 in 12.7 (ø) x 44.9 cm
Pack Size	4
Pack Type	Colorbox
Regions Sold	NA, AP
Warranty	1 year

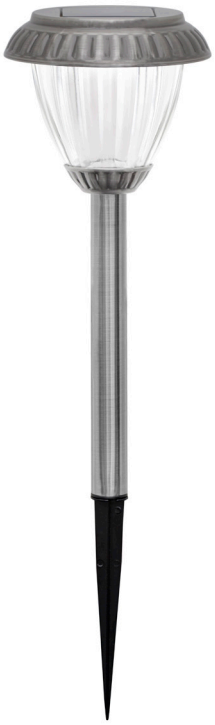

RS33Ma-R5-PT-S4/T4
GLO40SSP4DU* / GLO40SST4DU*

Lumens	5 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Pewter
Construction	Metal
Lens	Ribbed glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	5.5 (ø) x 19.4 in 14 (ø) x 49.2 cm
Pack Size	4
Pack Type	Colorbox w/ handle Tray + hangtag
Regions Sold	NA, AP
Warranty	1 year

RS34C-F30-BK-2/T4

Lumens	30 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Black
Construction	Metal
Lens	Ribbed glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 600 mAh 18500 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	7.0 (ø) x 17.3 in 17.8 (ø) x 43.9 cm
Pack Size	2 / 4
Pack Type	Colorbox (2) Tray + hangtag (4)
Regions Sold	NA
Warranty	2 years

SOLAR

RS40Pb-R5-RS-T6/W4/W8
GL003RT6DU* / GL003RP4DU* / GL003RP8DU*

Lumens	5 lm
Color Temperature	4600–5600K / 3800–4800K*
Runtime	Up to 8 hours
Finish	Rusty brown
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	5.6 (ø) x 11 in 14.3 (ø) x 27.9 cm
Pack Size	6 / 4 / 8
Pack Type	Tray + hangtag (6) Colorbox w/ window + handle (4/8)
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

RS58Ca-P2-PG-W2
GL027PGP2DU*

Lumens	15 / 6 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Pearl grey
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 400 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	7.1 (ø) x 23.4 in 18.0 (ø) x 59.5 cm
Pack Size	2
Pack Type	Colorbox w/ window + handle
Regions Sold	NA, AP
Warranty	1 year

RS84Me-R10-SS-W1
GLO25NP1DU*

Lumens	10 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Stainless steel
Construction	Metal
Lens	Seeded glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 2000 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	5.9 (ø) x 19.5 in 15.0 (ø) x 49.4 cm
Pack Size	1
Pack Type	Colorbox w/ window + handle
Regions Sold	NA, AP
Warranty	1 year

RS85Md-R5-SS-S4/T6/T9/W4
GLO11NT6DU* / GLO11NT9DU* / GLO11NP4DU*

Lumens	5 lm
Color Temperature	4600–5600K / 3800–4800K*
Runtime	Up to 8 hours
Finish	Stainless steel
Construction	Metal
Lens	Frosted glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	3.5 (ø) x 18.7 in 9 (ø) x 47.6 cm
Pack Size	4 / 6 / 9
Pack Type	Colorbox w/ handle (4) Colorbox w/ window + handle (4) Tray + hangtag (6/9)
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

RS89P-R5-BK-4
RS89P-R5-CB-2/T6
GL018BT6DU*

Lumens	5 lm
Color Temperature	4600–5600K / 3800–4800K*
Runtime	Up to 8 hours
Finish	Black / charcoal brown
Construction	Plastic
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	4.84 (ø) x 17.2 in 12.3 (ø) x 43.8 cm
Pack Size	2 / 4 / 6
Pack Type	Colorbox (2/4) Tray + hangtag (6)
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

RS933M-BK-4

Lumens	3 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Black
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 700 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	5.9 (ø) x 18.5 in 15 (ø) x 46.9 cm
Pack Size	4
Pack Type	Colorbox
Regions Sold	NA, AP
Warranty	1 year

RS97Ma-R5-CB-4/T6
GL039CBT6DU* / GL039CB4DU*

Lumens	5 lm
Color Temperature	4600–5600K
Runtime	Up up to 8 hours
Finish	Charcoal brown
Construction	Metal
Lens	Ribbed glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	5.8 (ø) x 18.3 in 14.7 (ø) x 46.4 cm
Pack Size	4 / 6
Pack Type	Colorbox (4) Tray + hangtag (6)
Regions Sold	NA, AP
Warranty	1 year

RS97Me-K10XL-CB-T6

Lumens	10 lm
Color Temperature	4600–5600K
Runtime	Up to 6 hours
Finish	Charcoal brown
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 700 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	6.5 (ø) x 18.4 in 16.5 (ø) x 46.8 cm
Pack Size	6
Pack Type	Tray + hangtag
Regions Sold	NA, AP
Warranty	1 year

Solar Landscape
Spotlights

SPS2-R5-BK-T9
GLO56BT9DU*

Lumens	5 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Black
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	2.7 x 5.7 x 11.8 in 6.9 x 14.4 x 30 cm
Pack Size	9
Pack Type	Tray + hangtag
Regions Sold	NA
Warranty	1 year

SPS1-P2-BK-PK3
GLO09BP3DU*

Lumens	15 / 12 lm
Color Temperature	4600–5600K / 3800-4800K*
Runtime	6 / 10 hours (w/ switch)
Finish	Black
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 400 mAh 14430 LiFePO4
No. / Type of LEDs	3x natural white
Product Dimensions	8.7 x 5.7 x 5.8 in 22 x 14.5 x 14.6 cm
Pack Size	3 spotlights + 1 panel
Pack Type	Colorbox
Regions Sold	AP, EMEA
Warranty	1 / 2* years

SPS2-P2-BK-T12
GL006BT12DU*

Lumens	15 / 12 lm
Color Temperature	3800–4800K*
Runtime	6 / 10 hours (w/ switch)
Finish	Black
Construction	Plastic
Lens	Plastic
Solar Panel	Amorphous silicon
Battery	1x 400 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	3.9 x 3.1 x 11.8 in 9.8 x 7.8 x 30 cm
Pack Size	12
Pack Type	Tray + hangtag
Regions Sold	AP, EMEA
Warranty	1 / 2* years

SS15P-R10X-BK-T9
GL032BT9DU*

Lumens	10 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Black
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 1100 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	3.1 x 5.0 x 11.6 in 7.8 x 12.8 x 29.4 cm
Pack Size	9
Pack Type	Tray + hangtag
Regions Sold	NA, AP
Warranty	1 year

SS15P-R5-BK-T16
GLO07BT16DU*

Lumens	5 lm
Color Temperature	3800–4800K*
Runtime	Up to 8 hours
Finish	Black
Construction	Plastic
Lens	Plastic
Solar Panel	Amorphous silicon
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	3.9 x 2.7 x 11.7 in 9.8 x 6.9 x 30 cm
Pack Size	16
Pack Type	Tray + hangtag
Regions Sold	AP, EMEA
Warranty	1 / 2* years

SS15Pc-P2-BK-T6

Lumens	15 / 6 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Black
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 400 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	3.1 x 6.4 x 19.5 in 7.8 x 16.3 x 49.5 cm
Pack Size	6
Pack Type	Tray + hangtag
Regions Sold	NA
Warranty	1 year

SS16C-P4-BK-2PK1
GL035BPDU*

Lumens	43.2 / 17.3 lm
Color Temperature	4600–5600K / 3800–4800K*
Runtime	6 / 10 hours (w/ switch)
Finish	Black
Construction	Metal
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 1000 mAh 18500 LiFePO4
No. / Type of LEDs	2x natural white
Product Dimensions	7 x 3.5 x 12.8 in 17.8 x 9 x 32.6 cm
Pack Size	1
Pack Type	Colorbox
Regions Sold	NA, EMEA
Warranty	1 / 2* years

SS23C-M8-BKT-M2PK1

Lumens	70 / 28 lm
Color Temperature	2700–3200K
Runtime	6 / 10 hours (w/ switch)
Finish	Textured black
Construction	Metal
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	2x 1000 mAh 18500 LiFePO4
No. / Type of LEDs	2x natural white
Product Dimensions	4.7 x 9.8 x 13.5 in (panel att.) 11.9 x 24.9 x 34.3 cm (panel att.) 4.7 x 9.8 x 16.1 in (remote) 11.9 x 24.9 x 40.9 cm (remote)
Pack Size	1
Pack Type	Mailer box
Regions Sold	NA, AP
Warranty	2 years

SS3C-F100L-BK-T6/T8

Lumens	100 lm
Color Temperature	4600–5600K
Runtime	Up to 6 hours
Finish	Black
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	2x 850 mAh 18500 LiFePO4
No. / Type of LEDs	4x natural white
Product Dimensions	10.5 x 4.8 x 13.4 in 26.7 x 12.2 x 33.9 cm
Pack Size	6 / 8
Pack Type	Tray + hangtag
Regions Sold	NA, AP
Warranty	2 years

SS3C-P5-BKT-1
GL045BDU*

Lumens	60 / 24 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Textured black
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	2x 850 mAh 18500 LiFePO4
No. / Type of LEDs	3x natural white
Product Dimensions	4.7 x 11.7 x 13 in 12 x 29.7 x 33 cm
Pack Size	1
Pack Type	Colorbox
Regions Sold	NA, AP
Warranty	1 year

Landscape • Spotlights

SS3P-P2-BK-T6
GL031BT6DU*

Lumens	15 / 6 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Black
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 400 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	3.5 x 7 x 12.6 in 8.8 x 17.8 x 32 cm
Pack Size	6
Pack Type	Tray + hangtag
Regions Sold	NA, AP
Warranty	1 year

SS3P-P4-BK-T6
GL034BT6DU*

Lumens	45 / 18 lm
Color Temperature	4600–5600K / 3800–4800K*
Runtime	6 / 10 hours (w/ switch)
Finish	Black
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 1000 mAh 18500 LiFePO4
No. / Type of LEDs	2x natural white
Product Dimensions	3.5 x 7.2 x 12.6 in 9 x 18.3 x 32.1 cm
Pack Size	6
Pack Type	Tray + hangtag
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

SS7P-F30-BK/CB-T9

Lumens	30 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Black / charcoal brown
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 600 mAh 18500 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	3.9 x 6.1 x 14.2 in 10 x 15.4 x 36.1 cm
Pack Size	9
Pack Type	Tray + hangtag
Regions Sold	NA, AP
Warranty	1 year

SS7P-P3-CB/PG-T6/W1
GLO33BT6DU* / GLO33BDU*

Lumens	30 / 12 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Charcoal brown / pearl grey
Construction	Plastic
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 850 mAh 18500 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	4.7 x 6.1 x 14.3 in 12 x 15.4 x 36.2 cm
Pack Size	6
Pack Type	Tray + hangtag
Regions Sold	NA, AP
Warranty	1 year

SS8C-P5-PG-W1
GL036BDU*

Lumens	60 / 24 lm
Color Temperature	4600–5600K / 3800–4800K*
Runtime	6 / 10 hours (w/ switch)
Finish	Pearl grey
Construction	Metal
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	2x 850 mAh 18500 LiFePO4
No. / Type of LEDs	2x SMT
Product Dimensions	9.3 x 5.7 x 15.6 in 23.6 x 14.5 x 39.7 cm
Pack Size	1
Pack Type	Colorbox w/ window + handle
Regions Sold	NA, EMEA
Warranty	1 / 2* years

SS9P-P3-BK-C1
GL005BDU*

Lumens	30 / 12 lm
Color Temperature	3800–4800K
Runtime	6 / 10 hours (w/ switch)
Finish	Black
Construction	Plastic
Lens	Plastic
Solar Panel	Amorphous silicon
Battery	1x 850 mAh 18500 LiFePO4
No. / Type of LEDs	2x natural white
Product Dimensions	4.7 x 3.5 x 12.2 in 12 x 9 x 31 cm
Pack Size	1
Pack Type	Colorbox
Regions Sold	AP, EMEA
Warranty	2 years

SS9C-P5-BKT-PK1
GLOO8BDU*

Lumens	60 / 24 lm
Color Temperature	3800–4800K
Runtime	6 / 10 hours (w/ switch)
Finish	Textured black
Construction	Metal
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	2x 850 mAh 18500 LiFePO4
No. / Type of LEDs	2x natural white
Product Dimensions	4.7 x 7.7 x 13 in (panel att.) 19.6 x 12 x 32.9 cm (panel att.) 4.7 x 7.7 x 11.9 in (remote) 19.6 x 12 x 30.1 cm (remote)
Pack Size	1
Pack Type	Colorbox
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

Solar Landscape
Decorative & Specialty Lights

G3149-P2-GN-1
GLO47GYDU*

Lumens	15 / 6 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Grey green
Construction	Polyresin
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 400 mAh 14430 LiFePO4
No. / Type of LEDs	1x natural white
Product Dimensions	7.5 x 6.8 x 5.5 in 19 x 17.2 x 14 cm
Pack Size	1
Pack Type	Colorbox
Regions Sold	NA
Warranty	1 year

G3152b-P3-BB-1/2
GLO17GDU*

Lumens	30 / 12 lm
Color Temperature	4600–5600K / 3800–4800K*
Runtime	6 / 10 hours (w/ switch)
Finish	Grey brown
Construction	Polyresin
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 850 mAh 18500 LiFePO4
No. / Type of LEDs	2x natural white
Product Dimensions	6.6 x 6.7 x 5.8 in 16.8 x 17x 14.7 cm
Pack Size	1 / 2
Pack Type	Colorbox
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

G3152b-P3-GN-1

Lumens	30 / 12 lm
Color Temperature	4600–5600K
Runtime	6 / 10 hours (w/ switch)
Finish	Grey green
Construction	Polyresin
Lens	Plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 850 mAh 18500 LiFePO4
No. / Type of LEDs	2x natural white
Product Dimensions	6.6 x 6.7 x 5.8 in 16.8 x 17 x 14.7 cm
Pack Size	1
Pack Type	Colorbox
Regions Sold	NA, AP
Warranty	1 year

MTO012a-R5-AA-1
GL046CBDU*

Lumens	5 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Antique
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	5.1 (ø) x 10.5 in 13 (ø) x 26.7 cm
Pack Size	1
Pack Type	Colorbox
Regions Sold	NA, AP
Warranty	1 year

QTP2-R5-AC-2
GLO48COP2DU*

Lumens	5 lm
Color Temperature	4600–5600K / 3800–4800K*
Runtime	Up to 8 hours
Finish	Antique copper
Construction	Metal
Lens	Frosted plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	5.6 x 5.6 x 3.5 in 14.1 x 14.1 x 9 cm
Pack Size	2
Pack Type	Colorbox
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

SL18P-R5-BK-2

Lumens	5 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Black
Construction	Plastic
Lens	N/A
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	3.3 x 3.8 in 8.3 x 9.7 cm
Pack Size	2
Pack Type	Colorbox
Regions Sold	NA, AP
Warranty	1 year

SL20Mb-R5-MB-D4
GL038GDU*

Lumens	5 lm
Color Temperature	4600–5600K / 3800–4800K*
Runtime	Up to 8 hours
Finish	Metallic bronze
Construction	Metal
Lens	Ribbed plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 900 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	4.5 x 4.4 x 1.8 in 11.3 x 11.2 x 4.6 cm
Pack Size	4
Pack Type	Blister card
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

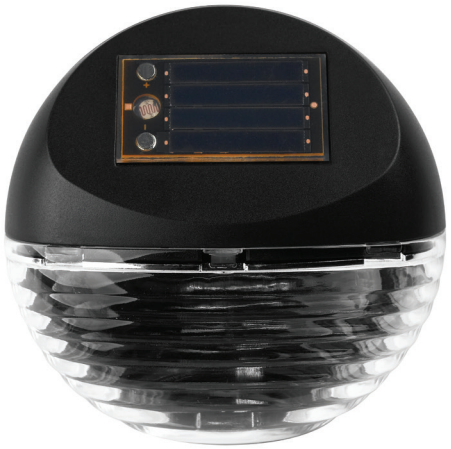

SL20Pa-K2-BK-2

Lumens	2 lm
Color Temperature	4600–5600K
Runtime	Up to 8 hours
Finish	Black
Construction	Plastic
Lens	Ribbed plastic
Solar Panel	SUNPOWER monocrystal
Battery	1x 300 mAh AA Ni-MH
No. / Type of LEDs	1x natural white
Product Dimensions	3.8 x 3.7 x 1.5 in 9.6 x 9.5 x 3.9 cm
Pack Size	2
Pack Type	Colorbox
Regions Sold	NA, AP
Warranty	1 year

Solar Landscape
Motion Security Lights

A5Pa-S120-PG/WH-PK1
SL001BKBDU* / SL001BDU*

Lumens	120 lm
Color Temperature	4600–5600K / 3800–4800K*
Runtime	1 / 5 minutes
Finish	Pearl grey / white
Construction	Plastic
Lens	Frosted plastic
Solar Panel	SUNPOWER Monocrystal
Battery	2X 600 mAh 18500 LiFePO4
No. / Type of LEDs	6X natural white
Product Dimensions	5.04 x 5.91 x 11.06 in 12.8 x 15.01 x 28.09 cm
Pack Size	1
Pack Type	Colorbox
Regions Sold	EMEA (A5Pa-S120-WH-PK1) NA, AP, EMEA (A5Pa-S120-PG-PK1)
Warranty	1 / 2* years

A12C-S400-BK-PK1
SL002BDU*

Lumens	400 lm
Color Temperature	4600–5600K
Runtime	1 minute / 2 hours
Finish	Black
Construction	Metal
Lens	Glass
Solar Panel	SUNPOWER Monocrystal
Battery	5X 1500 mAh AA Ni-MH
No. / Type of LEDs	60X natural white
Product Dimensions	8.9 x 5.71 in 22.61 x 14.5 cm
Pack Size	1
Pack Type	Colorbox
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

SL19P-S90N-SV-1/W2
GLO20SDU*

Lumens	90 lm
Color Temperature	4600–5600K / 3800–4800K*
Runtime	1 minute / 2 hours
Finish	Silver
Construction	Plastic
Lens	Ribbed plastic
Solar Panel	SUNPOWER Monocrystal
Battery	1X 1000 mAh 18500 LiFePO4
No. / Type of LEDs	1X natural white
Product Dimensions	4.3 x 6.1 x 6.3 in 11 x 15.6 x 16 cm
Pack Size	1 / 2
Pack Type	Colorbox (1) Colorbox w/ window + handle (2)
Regions Sold	NA, AP, EMEA
Warranty	1 / 2* years

SL19Pa-S90N-WH-1/W2

Lumens	90 lm
Color Temperature	4600–5600K
Runtime	1 minute / 2 hours
Finish	White
Construction	Plastic
Lens	Frosted plastic
Solar Panel	SUNPOWER Monocrystal
Battery	1X 1000 mAh 18500 LiFePO4
No. / Type of LEDs	1X natural white
Product Dimensions	4.3 x 6.1 x 6.3 in 11 x 15.6 x 16 cm
Pack Size	1 / 2
Pack Type	Colorbox (1) Colorbox w/ window + handle (2)
Regions Sold	NA, AP
Warranty	1 year

Solar Landscape
Containerization

Shipping Information • Containerization

Model number	Package Information				Master Carton Information			
	Qty / Pk	Dimensions (in)	GW (lbs)	NW (lbs)	Qty / Crtn	Dimensions (in)	GW (lbs)	NW (lbs)
Pathway Lights								
CS6Ma-R5-BK-8	8	11.4 x 8.5 x 12.3	14.7	13.4	2	17.8 x 12.2 x 13.4	30.8	26.6
MS16Mn-R5-SS-4	4	8.3 x 6.7 x 4.3	1.8	1.4	6	14.2 x 9.1 x 14.2	11.4	8.4
QM5Pd-P2-BK-2	2	8.6 x 7 x 11.2	3.3	2.9	4	17.9 x 11.8 x 15.4	15	11.4
QS59P-K5X-BK-2	2	10.8 x 6.9 x 7.6	2.6	2	4	14.6 x 11.5 x 16.3	11.7	7.9
QS6Pb-R6-BK-T9	9	16.1 x 16 x 12.8	9.7	8.6	1	16.7 x 16.7 x 14	11	8.6
QS7Ma-R5-SS-T6	6	11.7 x 8.2 x 12.2	6.8	6.4	1	12.2 x 8.7 x 13.4	7.7	6.4
QS7Ma-R5-SS-W4	4	6.7 x 6.7 x 13.2	4.7	4.2	6	20.9 x 14.2 x 14.4	30.6	25.5
QS7Mm-R5-SS-W4	4	6.7 x 6.7 x 13.2	5.5	5.1	6	20.9 x 14.2 x 14.4	34.5	30.1
RCA5-P2-CB-1	1	8.3 x 7.9 x 11.8	3.4	3.9	6	24.4 x 17.3 x 13	22.2	17.4
RM5Ma-P1-PG-W2	2	11.6 x 8.3 x 7	2.2	1.5	2	17.3 x 12.4 x 8.1	5.5	3.1
RS127Mc-P1-BKT-W4	4	12.4 x 6.7 x 14	3	2.4	2	14.2 x 13.2 x 15.2	7	4.8
RS162Ma-P2-SS-W2	2	13.4 x 8.3 x 7	1.9	1.5	4	17.3 x 14.2 x 15.2	8.6	5.9
RS172M-P1-SS-W4	4	12.8 x 4.9 x 14	5.1	4.4	2	13.6 x 10.6 x 15.2	11.2	8.8
RS175M-R5-SS-T6	6	16.4 x 11.2 x 15.4	7	6.2	1	17.1 x 11.8 x 16.5	8.1	6.2
RS220M-P3-CB-2	2	6.9 x 6.9 x 10.2	4.2	3.1	6	21.5 x 14.6 x 11.4	27.5	18.9
RS23M-F30-BK-T4	4	15.8 x 15.9 x 16.3	8.4	7.3	1	16.5 x 16.5 x 17.5	9.2	7.3
RS25Md-P2-BK-2	2	8.5 x 8.1 x 6.7	3.1	2.3	6	16.9 x 9.3 x 21.3	20.2	13.6
RS26M-P4-SS-W1	1	6.8 x 6.8 x 16.3	2.2	1.4	6	21.3 x 14.6 x 17.3	14.5	8.4
RS26M-S50M-CB-2	2	6.9 x 6.9 x 11.6	4.0	3.0	6	21.5 x 14.6 x 12.8	26.4	17.8
RS26M-S90M-CB/SS-W1	1	6.8 x 6.8 x 17.5	2.3	1.7	6	21.3 x 14.6 x 18.5	15.9	9.9
RS29M-P1-SS-2	2	11.6 x 6.9 x 7.3	2.9	2.2	6	21.5 x 12.4 x 15.6	18.7	13.2
RS2Pb-R5-DB-T6	6	16.2 x 11 x 13.4	3.5	2.4	1	16.9 x 11.7 x 14.4	4.4	2.4
RS2Pc-K5-BK-4	4	10.2 x 6.5 x 5.2	2.8	2.0	4	13.8 x 11.0 x 11.6	12.1	7.9
RS33Ma-R5-PT-S4	4	11.2 x 8.1 x 7.1	4.6	4.3	2	16.9 x 11.8 x 8.3	11	8.8
RS33Ma-R5-PT-T4	4	15.9 x 14 x 15	5.3	4.2	1	16.7 x 14.8 x 15.7	6.2	4.2
RS34C-F30-BK-2	2	7.9 x 7.9 x 13.9	4.4	3.8	4	16.5 x 16.5 x 15	18.9	15.4
RS34C-F30-BK-T4	4	15.8 x 15.9 x 17.9	8.8	7.7	1	16.5 x 16.5 x 19.1	10.1	7.7
RS40Pb-R5-RS-T6	6	22.6 x 15.2 x 12	4.2	2.5	1	23.2 x 15.7 x 12.8	5.9	2.5
RS40Pb-R5-RS-W4	4	11 x 6.1 x 13.2	2.8	1.7	8	25.4 x 22.8 x 14.2	24.2	13.4
RS40Pb-R5-RS-W8	8	11.7 x 7.8 x 13.2	4.4	3.3	2	16.1 x 12.6 x 14.4	10.1	6.6
RS58Ca-P2-PG-W2	2	14 x 8.3 x 14	2.1	1.5	2	17.3 x 14.8 x 15.2	5.3	3.1
RS84Me-R10-SS-W1	1	6.1 x 6.1 x 16.7	2.2	1.6	6	19.1 x 12.8 x 17.7	14.7	9.7
RS85Md-R5-SS-S4/W4	4	8.7 x 8.7 x 10.2	3.9	3.3	2	18.1 x 9.4 x 11.4	8.7	6.6
RS85Md-R5-SS-T6	6	12.9 x 8.8 x 15.7	6.2	5.1	1	13.6 x 9.4 x 16.9	7.5	5.1
RS85Md-R5-SS-T9	9	15.9 x 14 x 15.9	8.8	7.5	1	16.7 x 14.8 x 16.9	9.7	7.5
RS89P-R5-BK-4	4	10.2 x 9.4 x 10.4	5.7	5	4	21.3 x 19.7 x 11.6	24.4	19.8
RS89P-R5-CB-2	2	7.1 x 5.9 x 10.8	3.3	2.8	4	15 x 12.6 x 12	12.3	11
RS89P-R5-CB-T6	6	15.5 x 14.2 x 15.4	8.8	7.5	1	16.1 x 14.8 x 16.5	9.9	7.5
RS933-BK-4	4	11.8 x 11.8 x 8.7	9	8.4	3	12.5 x 12.5 x 27.2	28.6	25.1

Container Information (Package)				Container Information (Container)			
20’	40’	40’ HQ	45’	20’	40’	40’ HQ	45’
1260	2580	2920	3320	630	1290	1460	1660
5880	12120	13800	15840	980	2020	2300	2640
2200	4600	5200	5880	550	1150	1300	1470
3200	6600	7480	8520	650	1370	1560	1820
430	900	1040	1178	430	900	1040	1178
1250	2640	2850	3250	1250	2640	2850	3250
2580	5160	5880	6780	430	860	980	1130
2484	5076	5922	6762	414	846	987	1127
1920	4020	4500	5280	320	670	750	880
1960	4080	4780	5420	1050	2150	2440	2850
1200	2500	2920	3320	640	1320	1530	1720
1860	3840	4520	5120	465	960	1130	1280
1560	3220	3780	4280	830	1700	1940	2230
530	1100	1250	1400	530	1100	1250	1400
2723	5797	6808	7712	454	966	1135	1285
325	700	840	930	325	700	840	930
3180	6780	7620	8700	530	1130	1270	1450
1860	3840	4680	5400	310	640	780	900
2413	5156	6058	6866	402	859	1010	1144
1860	3900	4320	4920	310	650	720	820
2640	5460	6120	6960	440	910	1020	1160
650	1350	1520	1730	650	1350	1520	1730
2600	5480	6240	7280	1000	2120	2380	2700
2240	4600	5200	5800	1120	2300	2600	2900
460	940	1040	1200	460	940	1040	1200
1560	3360	3920	4340	390	840	980	1085
325	695	805	900	325	695	805	900
390	780	880	1030	390	780	880	1030
1760	3640	4080	4640	220	455	510	580
1230	2500	2860	3280	615	1250	1430	1640
900	1860	2180	2460	450	930	1090	1230
2400	5040	5760	6360	400	840	960	1060
1900	3880	4400	5000	950	1940	2200	2500
800	1680	1980	2200	800	1680	1980	2200
410	850	980	1120	410	850	980	1120
1520	3160	3360	4000	380	790	840	1000
3040	6320	7200	8160	760	1580	1800	2040
430	890	1050	1200	430	890	1050	1200
1191	2505	2850	3306	397	835	950	1102

Shipping Information • Containerization

Model number	Package Information				Master Carton Information			
	Qty / Pk	Dimensions (in)	GW (lbs)	NW (lbs)	Qty / Crtn	Dimensions (in)	GW (lbs)	NW (lbs)
Pathway Lights								
RS97Ma-R5-CB-4	4	8.7 x 6 x 13	5.1	4.7	4	18.1 x 13.8 x 13.2	22	18.7
RS97Ma-R5-CB-T6	6	18.9 x 12.8 x 15.4	8.6	7.5	1	19.5 x 13.6 x 16.3	9.2	7.3
RS97Me-K10XL-CB-T6	6	24.6 x 16.3 x 15.4	8.1	7.2	1	25.3 x 17.1 x 16.5	10.2	7.2
Spotlights								
SPS2-R5-BK-T9	9	19.2 x 10.7 x 12.6	4.8	4.0	1	19.9 x 11.4 x 13.5	6.6	4.0
SPS1-P2-BK-PK3	1	8.7 x 5.7 x 5.7	2.3	2.1	8	18.1 x 12.2 x 12.6	20.2	16.7
SPS2-P2-BK-T12	12	22.6 x 15.2 x 12.2	6.8	5.1	1	24 x 16.5 x 14	9.9	5.1
SS15P-R10X-BK-T9	9	15.9 x 14 x 12.2	4.8	3.5	1	16.7 x 14.8 x 13	5.9	3.5
SS15P-R5-BK-T16	16	22.6 x 15.2 x 12.2	7.7	5.9	1	24 x 16.5 x 13.8	11	5.9
SS15Pc-P2-BK-T6	6	14.6 x 14.2 x 15.9	5.5	4.4	1	15.2 x 14.8 x 16.9	6.9	4.4
SS16C-P4-BK-2PK1	2	7.5 x 6.9 x 7.7	2.8	2.4	4	15.7 x 14.6 x 9.1	12.1	9.5
SS23C-M8-BKT-M2PK1	2	9.8 x 5.9 x 7.9	3.8	2.9	6	20.5 x 18.5 x 9.4	25.3	17.4
SS3C-F100L-BK-T6	6	16.5 x 15.4 x 13.4	10.6	9.9	1	17.1 x 15.9 x 14.6	12.1	9.9
SS3C-F100L-BK-T8	8	21.5 x 15.4 x 13.8	15.0	13.2	1	22.1 x 16.0 x 14.5	16.3	13.2
SS3C-F100L-BK-2	2	7.3 x 7.3 x 9.8	4.0	3.3	4	15.4 x 15.4 x 11.0	16.1	13.2
SS3C-P5-BKT-1	1	5.9 x 5.4 x 8.5	1.9	1.5	4	12.6 x 11.6 x 9.8	8.3	6.2
SS3P-P2-BK-T6	6	15.8 x 11.9 x 13.2	5.3	4.0	1	16.5 x 12.6 x 14.4	6.2	4.0
SS3P-P4-BK-T6	6	15.9 x 13.4 x 5.7	5.3	4.2	1	16.5 x 14.0 x 13.8	6.8	4.2
SS7P-F30-BK/CB-T9	9	20.6 x 12.6 x 14.8	8.4	6.8	1	21.3 x 13.2 x 15.7	10.1	6.8
SS7P-P3-CB/PG-T6	6	13.1 x 12.3 x 14.6	5.7	4.8	1	13.8 x 13.0 x 15.6	6.8	4.8
SS8C-P5-PG-W1	1	8.1 x 6.9 x 7	0.9	0.6	4	15 x 8.9 x 15.2	4.6	2.2
SS9P-P3-BK-C1	1	5.9 x 4.7 x 7.8	0.9	0.6	6	15 x 12.6 x 8.9	6.4	3.8
SS9C-P5-BKT-PK1	1	6.1 x 5.5 x 8.1	1.8	1.5	6	17.4 x 13 x 9.1	13.2	9.1
Decorative & Specialty Lights								
G3149-P2-GN-1	1	8.9 x 8.1 x 7.3	2.9	2.5	8	18.5 x 16.9 x 15.7	25.3	20
G3152b-P3-BB-1	1	8.3 x 8.3 x 7.4	2.9	2.4	6	25.8 x 9.1 x 15.9	18.0	14.3
G3152b-P3-BB-2	2	8.1 x 7.5 x 15.6	5.3	4.6	4	16.9 x 15.7 x 16.5	23.1	18.5
G3152b-P3-GN-1	1	8.3 x 8.3 x 7.4	2.9	2.4	6	25.8 x 9.1 x 15.9	18	14.3
MTO012a-R5-AA-1	1	6.5 x 6.5 x 10	2	1.5	4	13.8 x 13.8 x 11.2	8.6	6.2
QTP2-R5-AC-2	2	6.9 x 5.7 x 5.8	2	1.7	4	12.2 x 7.7 x 12.6	8.6	6.6
SL18P-R5-BK-2	2	6.5 x 4.1 x 3.5	0.7	0.5	4	9.1 x 7.3 x 8.3	3.2	3
SL20Mb-R5-MB-D4	4	10.9 x 1.9 x 12.4	1.6	1.2	16	23.3 x 16.7 x 13.2	27.1	20
SL20Pa-K2-BK-2	2	4.0 x 3.4 x 4.0	0.5	0.3	18	12.8 x 11.0 x 9.1	9.5	7.0

Container Information (Package)				Container Information (Cartons)			
20’	40’	40’ HQ	45’	20’	40’	40’ HQ	45’
2080	4520	5120	5920	520	1130	1280	1480
420	880	970	1110	420	880	970	1110
225	450	540	618	225	450	540	618
600	1240	1340	1550	600	1240	1340	1550
5200	10560	12000	13600	650	1320	1500	1700
320	670	780	880	320	670	780	880
550	1150	1330	1500	550	1150	1330	1500
324	690	780	860	324	690	780	860
480	1000	1140	1300	480	1000	1140	1300
3440	7200	8200	9200	860	1800	2050	2300
2592	5184	6336	7392	432	864	1056	1232
420	870	1015	1155	420	870	1015	1155
360	755	840	965	360	755	840	965
2800	5760	6560	7400	700	1440	1640	1850
5000	10600	11800	13200	1250	2650	2950	3300
600	1230	1430	1600	600	1230	1430	1600
530	1100	1280	1480	530	1100	1280	1480
415	850	950	1080	415	850	950	1080
670	1360	1500	1740	670	1360	1500	1740
3400	7280	8400	9600	900	1840	2140	2420
6480	13680	15420	17400	1080	2280	2570	2900
5460	10800	11880	13596	910	1800	1980	2266
2720	5600	6760	7680	340	700	845	960
2880	6000	6780	7740	480	1000	1130	1290
1400	2900	3480	3960	350	725	870	990
2880	6000	6780	7740	480	1000	1130	1290
3360	6920	7600	9080	840	1730	1900	2270
6200	12600	14400	16400	1550	3150	3600	4100
13000	26400	30400	34800	3250	6600	7600	8700
5600	11600	13280	14880	350	725	830	930
26100	53640	60300	69300	1450	2980	3350	3850

Shipping Information • Containerization

Model number	Package Information				Master Carton Information			
	Qty / Pk	Dimensions (in)	GW (lbs)	NW (lbs)	Qty / Crtn	Dimensions (in)	GW (lbs)	NW (lbs)
Motion Security Lights								
A5Pa-S120-PG-PK1	1	8.8 x 5.1 x 7	0.9	0.5	6	16.3 x 9.4 x 15.2	9.2	6.2
A5Pa-S120-WH-PK1	1	8.8 x 5.1 x 7	0.9	0.5	6	16.3 x 9.4 x 15.2	9.2	6.2
A12C-S400-BK-PK1	1	6.1 x 5.5 x 9.1	2.8	2.5	4	12.6 x 11.6 x 9.8	8.3	6.2
SL19P-S90N-SV-W2	2	10.4 x 6.7 x 7	1.8	1.1	4	14.2 x 11.2 15.2	8.1	4.4
SL19Pa-S90N-WH-1	1	6.7 x 4.9 x 6.6	1.1	0.8	12	15.9 x 14.2 x 14.4	13.9	9.9
Batteries								
BT-LP-18500-1000-2	2	3 x 0.6 x 4.9	0.1	0.1	10	7.7 x 3.9 x 5.9	1.2	0.7
BT-LP-14430-400-2	2	3 x 0.8 x 4.9	0.2	0.1	10	9.4 x 3.9 x 5.9	1.9	1.3

Container Information (Package)				Container Information (Cartons)			
20’	40’	40’ HQ	45’	20’	40’	40’ HQ	45’
4500	9300	10920	12360	750	1550	1820	2060
4500	9300	10920	12360	750	1550	1820	2060
4500	9270	10440	12060	500	1030	1160	1340
2880	5960	7000	7920	740	1520	1780	2030
6600	13800	15360	17640	550	1150	1280	1470
100000	206000	233000	264000	10000	20600	23300	26400
81000	165000	189000	214000	8100	16500	18900	21400

DURACELL®

Jiawei Technology (USA) Ltd.
2305 Lincoln Avenue • Hayward, CA 94545
Tel: 1-855-826-7488 Fax: 1-510-887-8825
customerservice@jiaweitech.com
www.JiaweiTechnology.com

www.DuracellLighting.com

© 2016 DURACELL, Bethel, CT 06801. Duracell is a registered trademark of Duracell U.S. Operations, Inc., used under license. All rights reserved.

D-SLR-CA-02022016 Rev. 09-22-16