

LED Strip Light

GL-ST105 Series




Energy Save



High Lumen




Long Life




Item Code	Body Size	Cutting Unit	Input Voltage	Watt/M	Lm/M	Max. Length	Beam Angle	CCT
GL-ST105-3000K	W14.5x6mm	180LEDs/1m	AC 220-240V	10W	883lm	50m	120°	3000K
GL-ST105-4000K	W14.5x6mm	180LEDs/1m	AC 220-240V	10W	946lm	50m	120°	4000K
GL-ST105-6500K	W14.5x6mm	180LEDs/1m	AC 220-240V	10W	904lm	50m	120°	6500K


Dimensions in mm

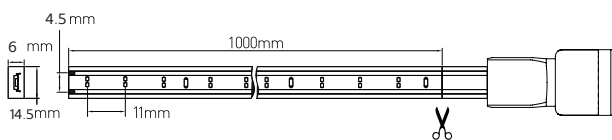


POLAR AND CONE DIAGRAM



PHOTOMETRIC OF 1M STRIP

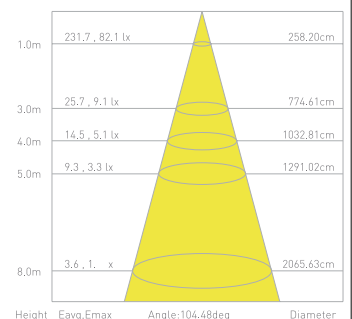



LED Strip Solution

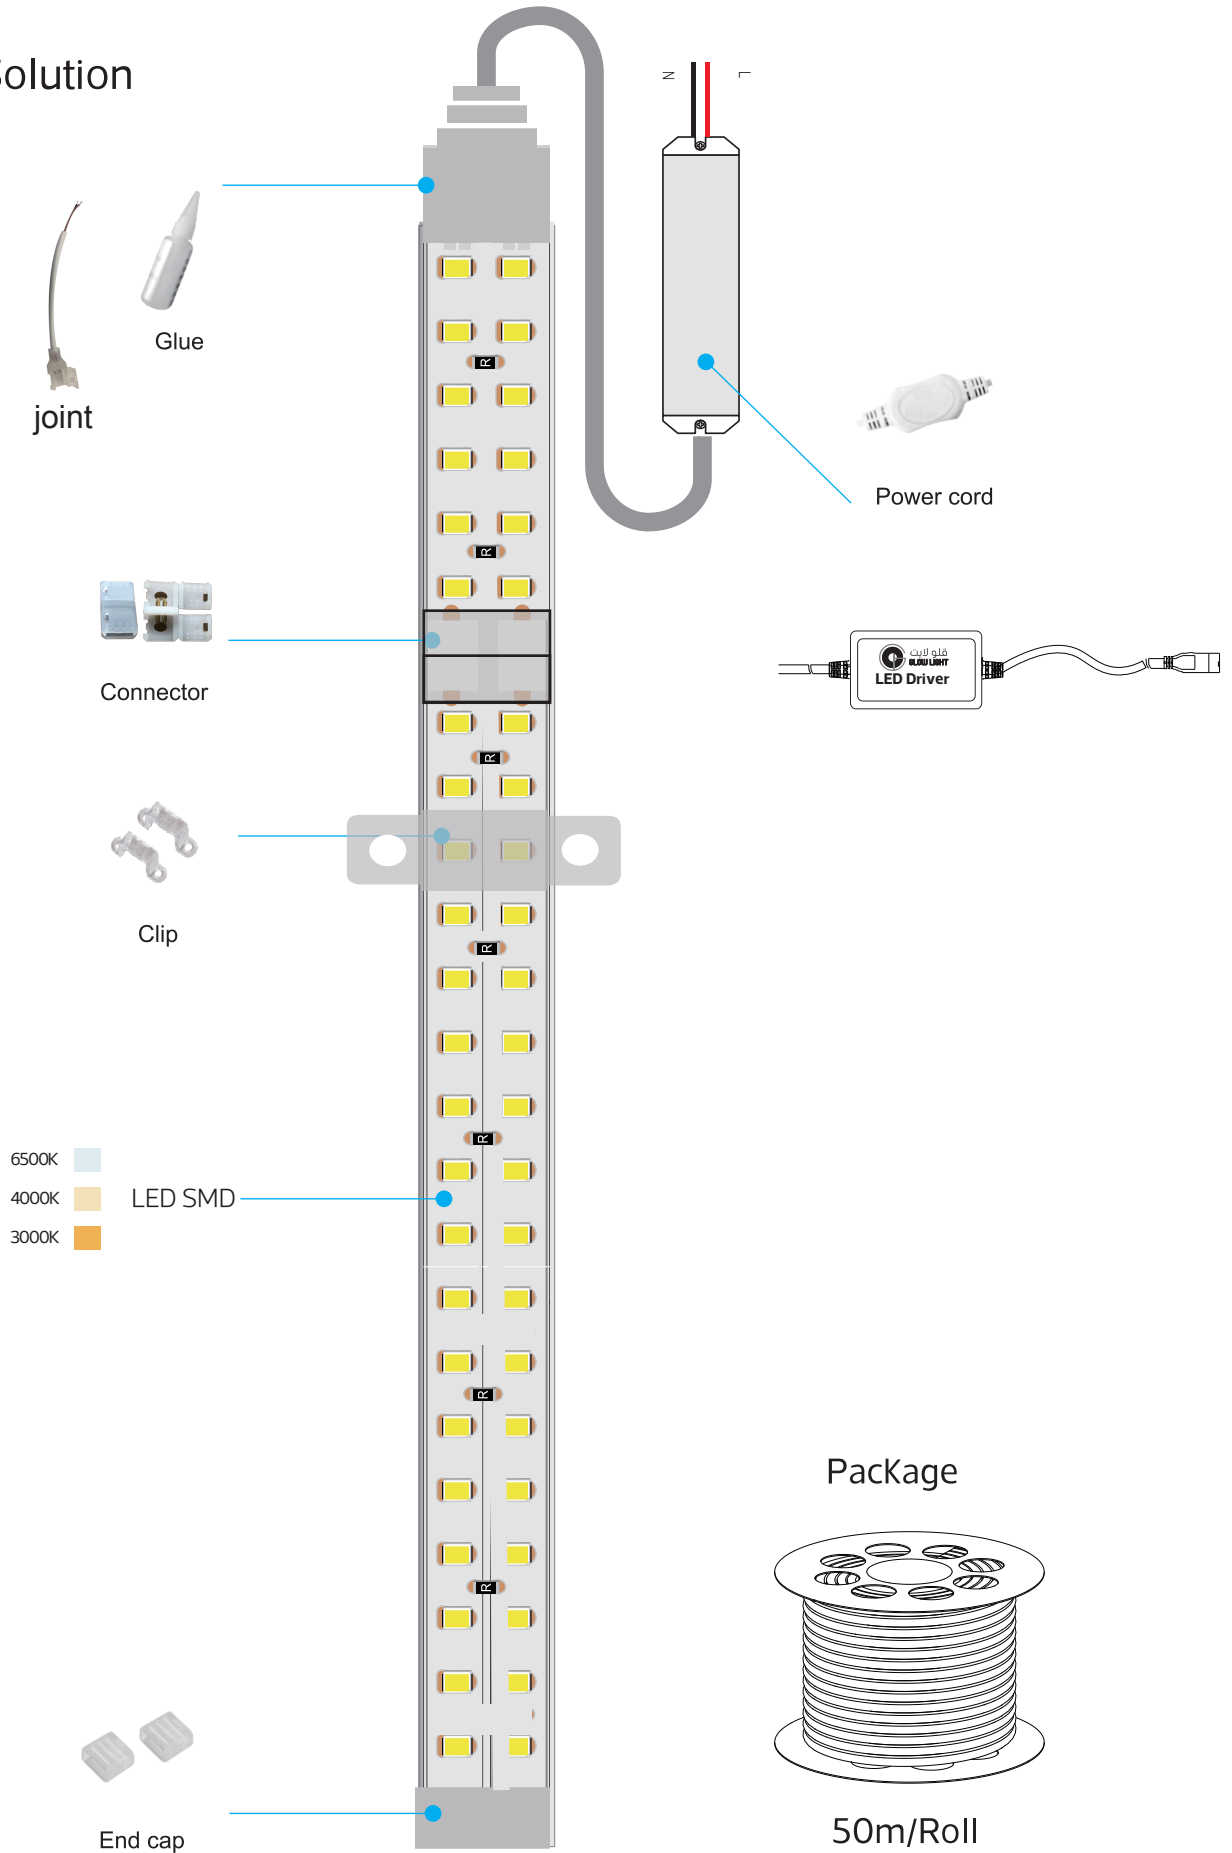


Installation step

⚠ Before finish the installation , do not connect the power

1. According to practical demand , Fix the strip with clip and screws in needed place
(The strip is good flexibility for any shape)

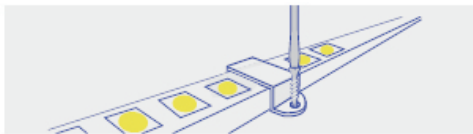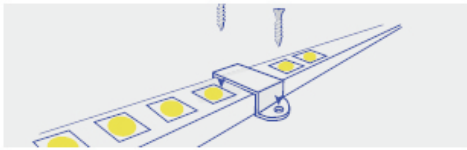


2. Use shape pin to connect the strip and power supply cord .Then glue the interface

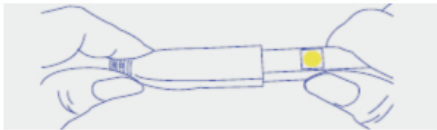


⚠ Must use the designative glue to glue the interface

3. Cut the strip according to your requirement (each 1 meter can be cut for 220V strip .)

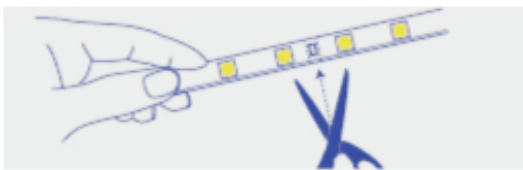


⚠ Detail cutting mark mentioned in next page

4. Close the strip with end cap and glue with the designative glue for safety and waterproof




⚠ Must use the designative glue to glue the interface

RoHS CE

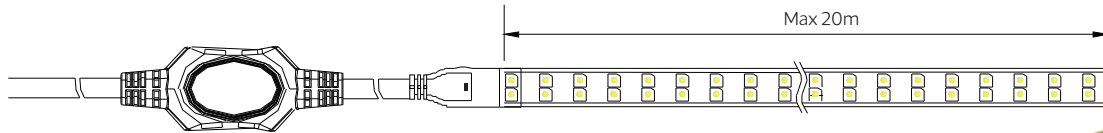

**Power Cord
installation**

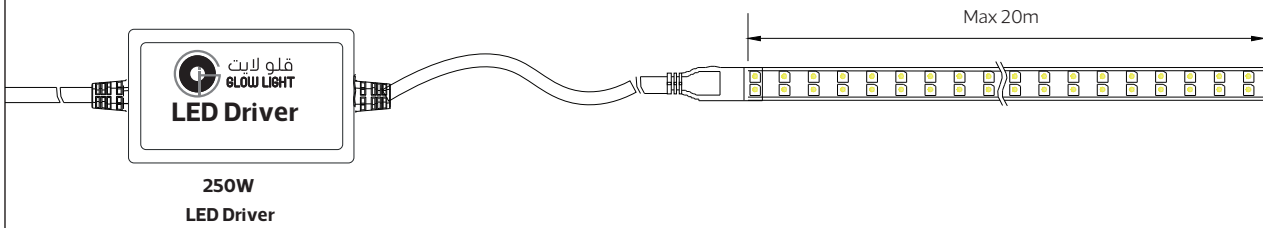

**LED Driver
installation**



joint



Glue



Power cord



Connector




Clip



End cap


Accessories

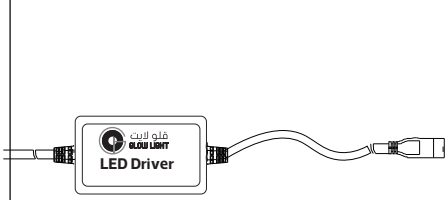

joint



Glue



Connector



Clip



End cap

LED Driver Accessories

