









## MINI LED DOWNLIGHT


NR-ML101 Series  
IP20

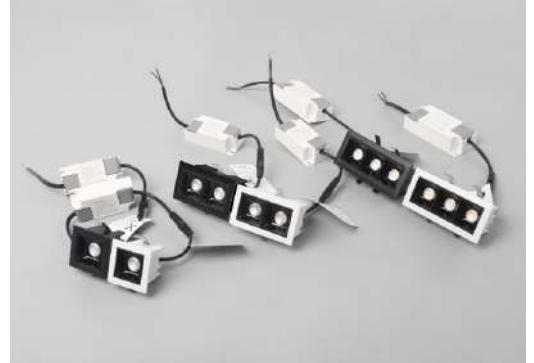

Item Code	P (W)	Color	Output (lm)	lm/w	Dimensions in mm			Hole Size (mm)	kg
					A	B	C		
NR-ML101-1-3	3	Black/White	210	70	44	44	40	36*36	0.07
NR-ML101-2-6	6	Black/White	390	65	75	44	43	36*68	0.14
NR-ML101-3-9	9	Black/White	585	65	95	44	40	36*85	0.13

### Dimensions in mm

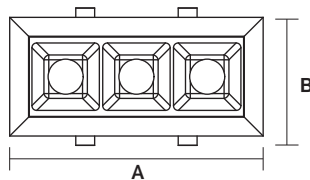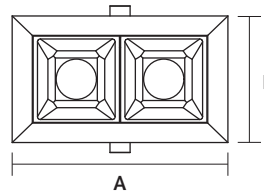

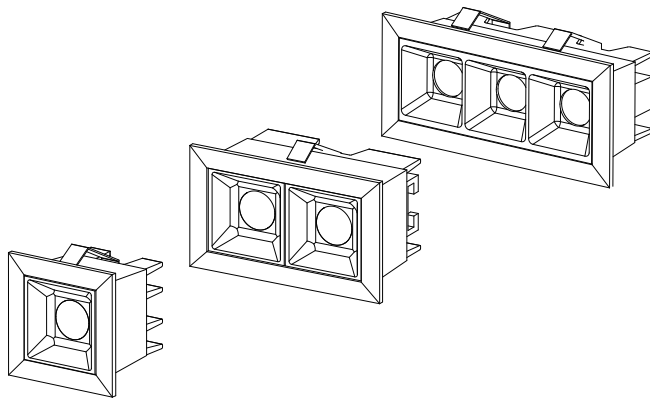


**Description:**  
MINI LED DOWNLIGHT


**Main material:**  
Die-cast aluminum+Engineering plastics

**Specification**  
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps  
High quality light, high color rendering, less heat, no UV or IR radiation  
LED driver is included  
IP20

**Applications**  
. Shopping mall  
. Office buildings  
. Exhibition hall

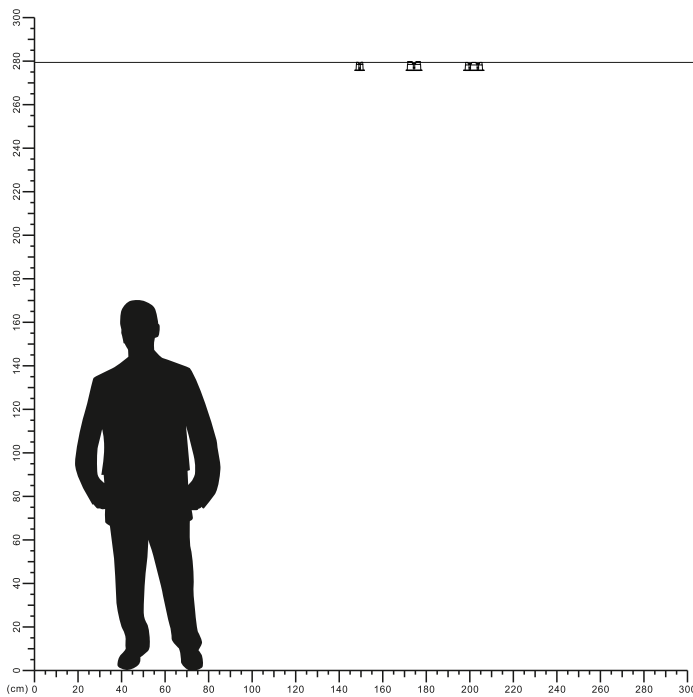


# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

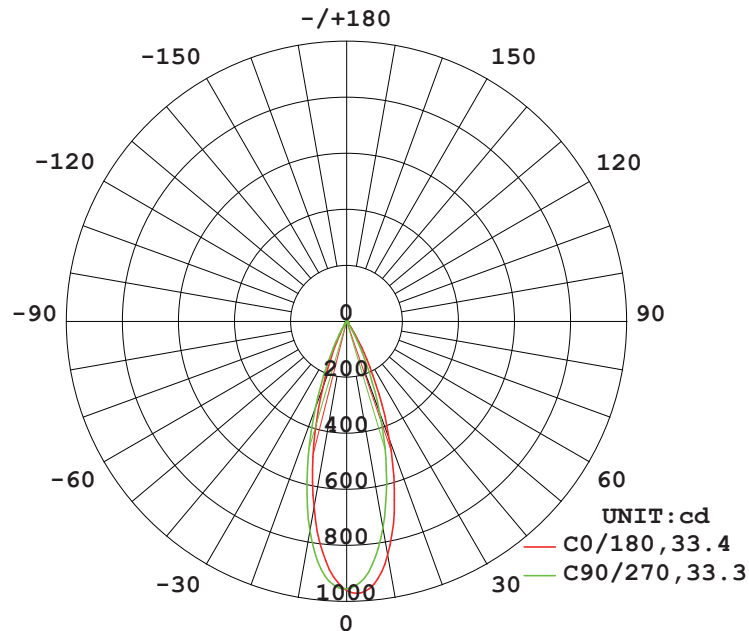

AVERAGE BEAM ANGLE (50%) : 33.3 DEG


## Illuminance at a Distance

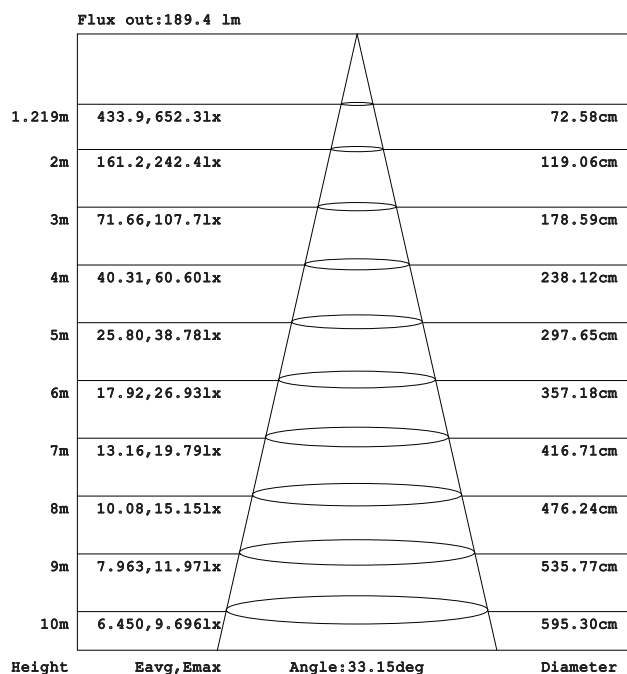

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


**Model:NR-ML101-1-3**

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

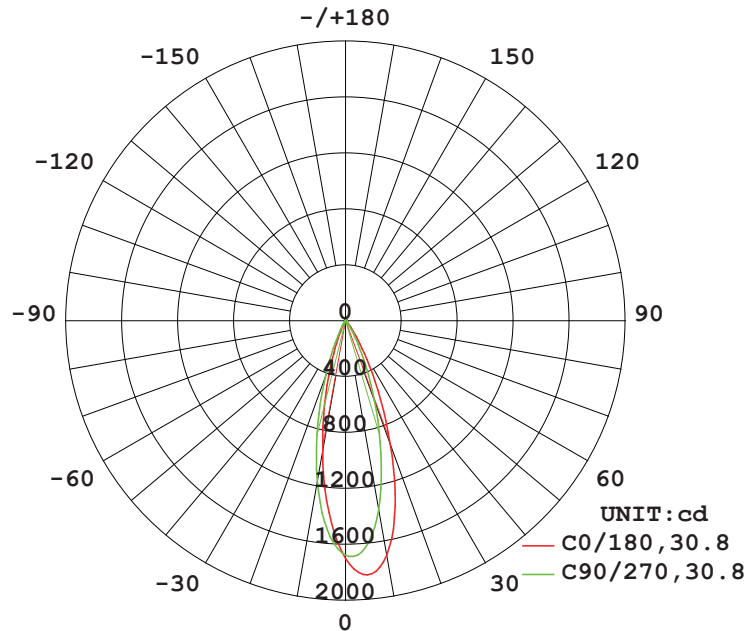

AVERAGE BEAM ANGLE (50%) : 30.8 DEG


## Illuminance at a Distance

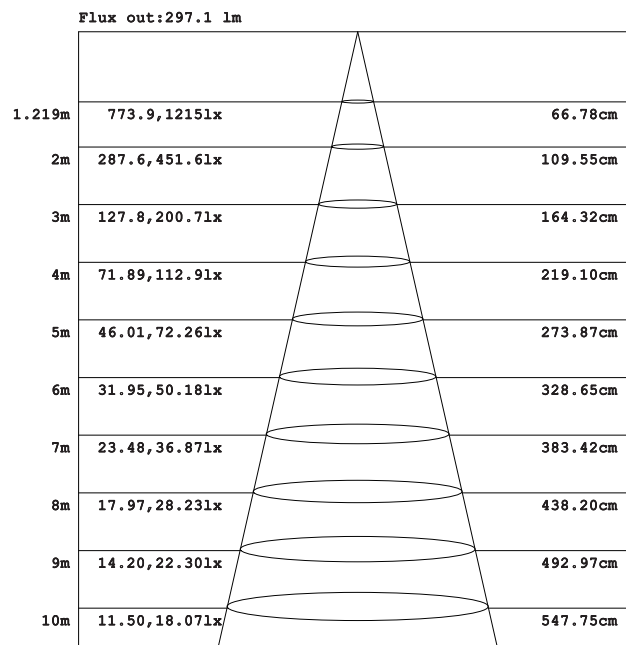

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Model: NR-ML101-2-6

# LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

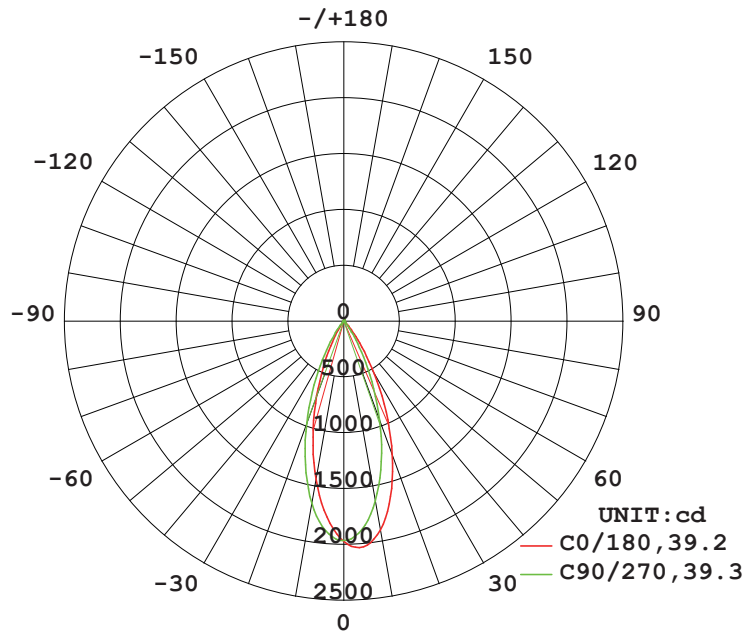



AVERAGE BEAM ANGLE (50%) : 39.3 DEG

## Illuminance at a Distance

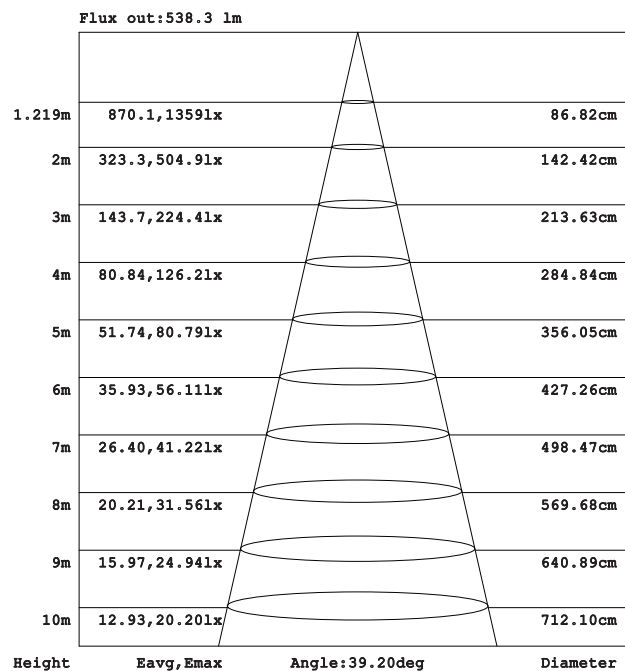


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

**Model:NR-ML101-3-9**

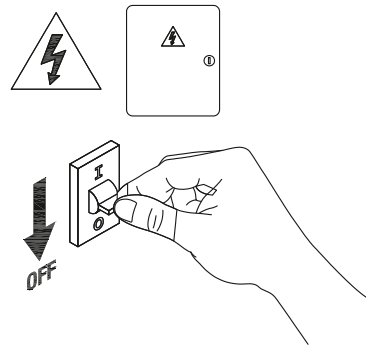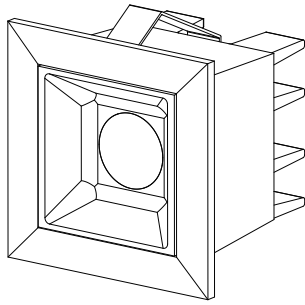


**1**

Turn off The Power




**2**

Cut a hole in the ceiling

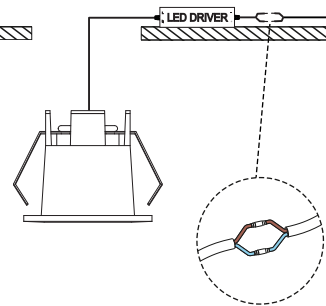


**3**

Connect Cable




**4**

Wiring complete

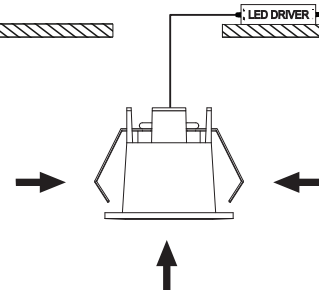


**5**

Press two buckles into the ceiling

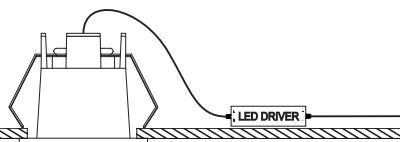

**6**

Installation completed

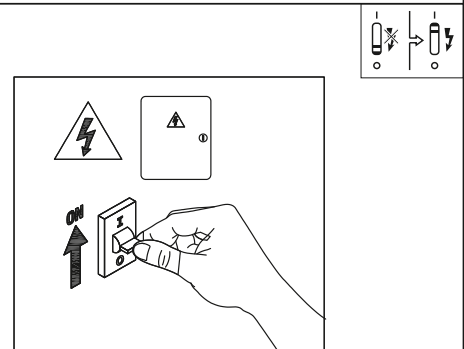

**7**

Turn on the power

