









## LED Strip Power Supply

NR-PS Series  
IP20

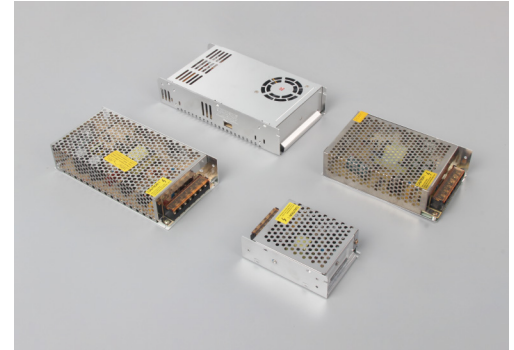



Item Code	P(W)	Input	Output Current	Dimensions in mm			kg
				A	B	C	
NR-PS-60W	60	AC100-240V 50/60Hz Max:0.6A	DC24V ≡ 2.5A Max	110	78	37	0.19
NR-PS-100W	100	AC100-240V 50/60Hz Max:2.0A	DC24V ≡ 4.25A Max	158	98	43	0.32
NR-PS-150W	150	AC100-240V 50/60Hz Max:1.5A	DC24V ≡ 6.2A Max	198	98	43	0.43
NR-PS-360W	360	AC100-240V 50/60Hz Max:3.6A	DC24V ≡ 15A Max	215	115	47	0.66

### Dimensions in mm

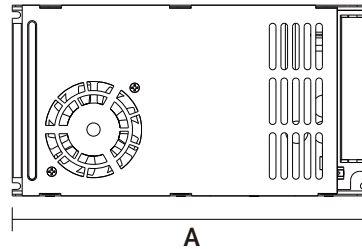

NR-PS-60W NR-PS-100W NR-PS-150W


NR-PS-360W

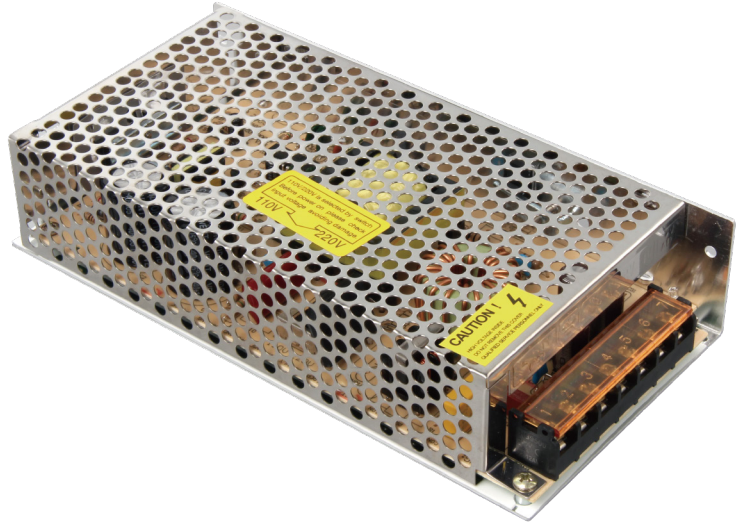

IC voltage stabilizer




Overload protection



Control luminous flux attenuation



No strobe

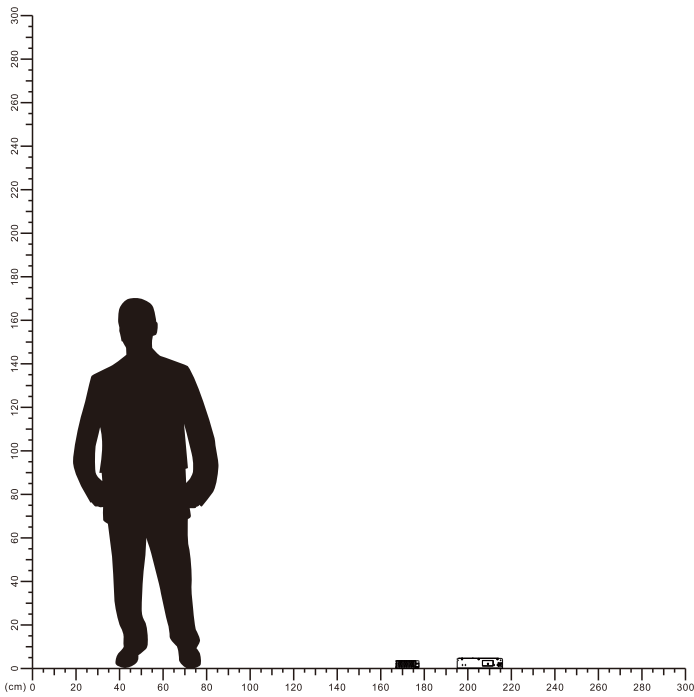

Connection diagram

