



SOLAR LED OUTDOOR WALL LIGHT


SWL-33



IP54



Item Code	Watt	Solar Panel	Battery Capacity	Charging/ Discharging Temp:	Charging Time	CCT	kg
SWL-33	13.8W	Mono-Crystalline 3W	3.7V/14.8Wh	0~45°C/-20~60°C	7h	4000K,Ra≥80	0.9
Lumen	Lighting Time in Rainyday	Control Mode	Lighting Mode	IP/IK Rated			
101.4lm/W	≥10 days	Long Press 1.5s On/Off	M1:25% till dawn M2:50% till dawn M3:75% till dawn M4:100% till dawn	IP54			

Dimensions in mm

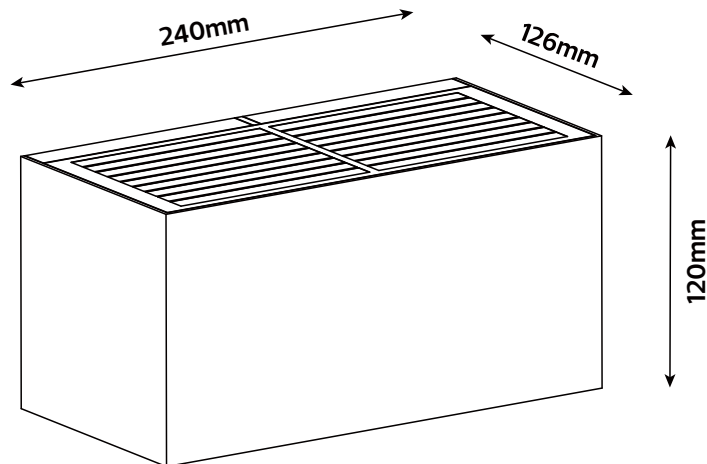

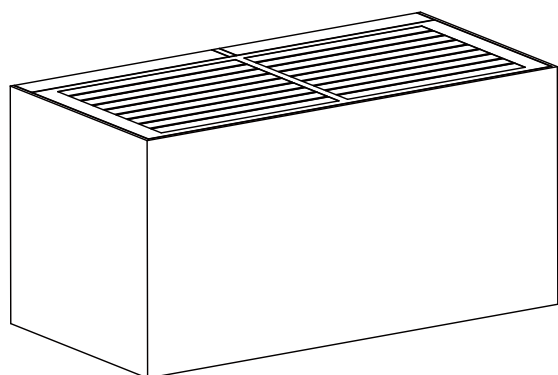
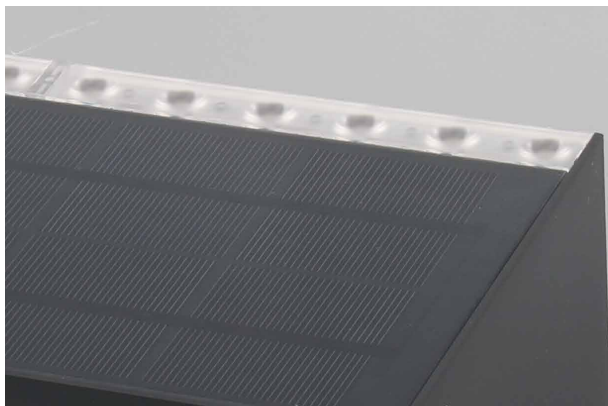



Description:
SOLAR LED OUTDOOR WALL LIGHT

Main material:
PC

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP 54

Applications
. Park
. Square
. Garden

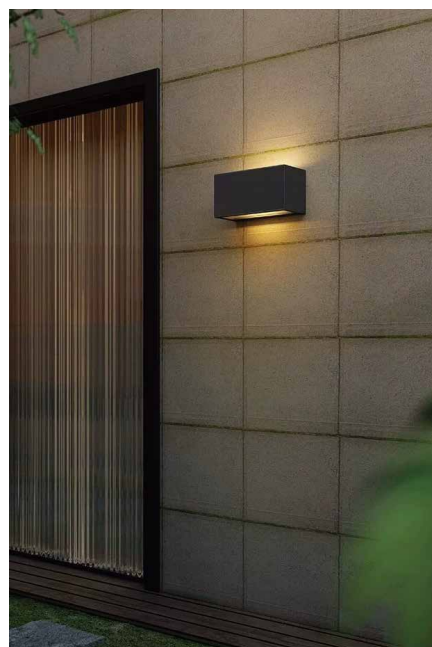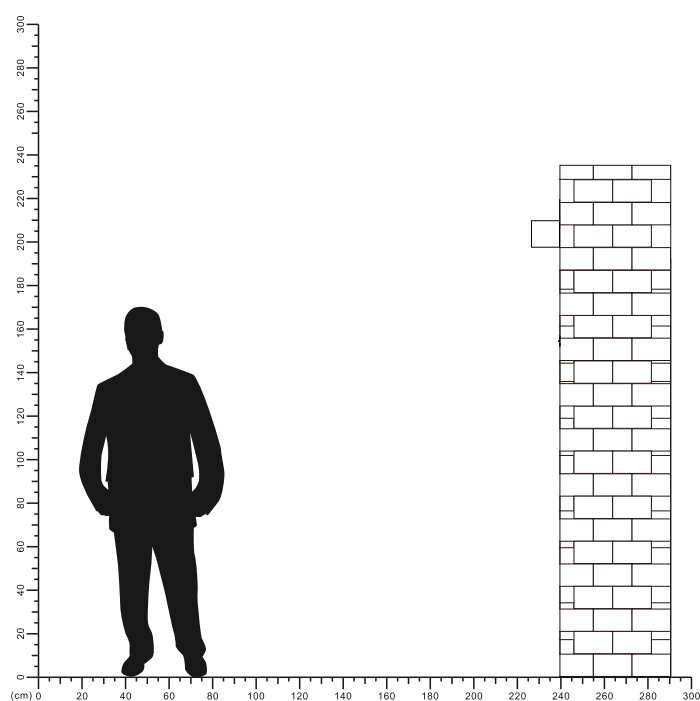

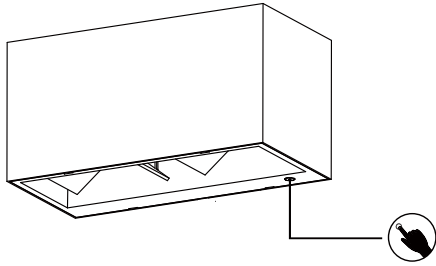


Switch Button

- 1.On/Off: Long press for 1.5s.
(After the initial activation, the lamp will turn on/off automatically when dark/dawn.)
- 2.Change lighting mode: Short press.

Lighting Mode


M1: 25% till dawn
M3: 75% till dawn

M2: 50% till dawn
M4: 100% till dawn

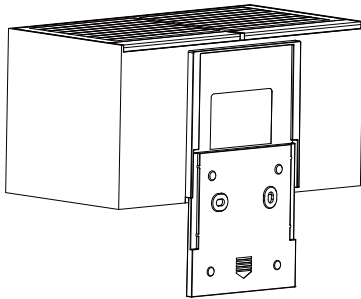


1

Take off the bracket from the lamp body




2

Drilling and embedding the expansion screws into the wall

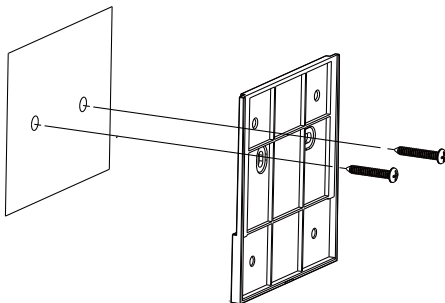

3

Fix the bracket by screws into the wall

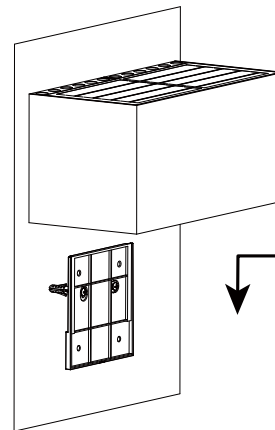

4

Hang the lamp body on the bracket

